

Ebrahim Yousuf Hardware & Tools Trading LLC



COMPANY PROFILE

Ebrahim Yousuf Trading is a well-established company with a rich history spanning over 8 years. We specialize in providing top-quality rigging hardware solutions for a wide range of industries. Our commitment to excellence, customer satisfaction, and innovative products has positioned us as a reliable partner in the market.





CORE AREAS OF EXPERTISE



RIGGING HARDWARE

Ebrahim Yousuf Trading is a trusted source for a comprehensive range of rigging hardware products. From hooks and shackles to wire ropes and chains, we offer a diverse selection to meet various rigging needs.



LIFTING EQUIPMENT

Safety and efficiency are paramount in lifting operations. Ebrahim Yousuf Trading provides lifting equipment designed to meet rigorous industry standards. Our products are designed to facilitate smooth and secure lifting, enhancing overall operational safety.



TENT MAKING

Our expertise extends to the tent making industry, where we supply high-quality materials and components. We understand the importance of reliable and durable materials in tent construction, and we strive to provide solutions that ensure safety and longevity.



MARINE SUPPLY

Catering to the maritime sector, we offer a range of marine supplies that include essential hardware and equipment. Our products are built to withstand the harsh marine environment, ensuring durability and performance.



Why Choose Ebrahim Yousuf Trading?

1) Experience

With 8 years of industry experience, we have honed our skills and deepened our understanding of customer needs.

2) Quality Assurance

We prioritize the quality of our products. Each item undergoes stringent quality checks to ensure it meets the highest standards.

3) Customer Focus

Our commitment to customer satisfaction drives us to provide personalized solutions, prompt support, and reliable products.

4) Innovation

We stay updated with the latest industry trends and technological advancements, allowing us to offer innovative solutions to our clients.


MISSION

Our mission is to be a leading provider of rigging hardware solutions, catering to various industries including tent making, lifting equipment, and marine supply. We aim to contribute to the success of our clients by providing them with top-quality products and exceptional service.

VISION

We envision Ebrahim Yousuf Trading as a company that continually sets industry benchmarks through its dedication to quality, innovation, and customer satisfaction. We aspire to expand our reach and become a global leader in the rigging hardware market.


WIRE ROPES

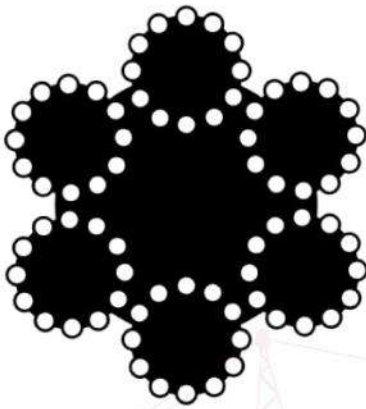

6 X 12 FC

NOMINAL TENSILE STRENGTH

NOMINAL DIAMETER (MM)	APPROX WEIGHT (KG/100M)	MINIMUM BREAKING STRENGTH (kN)	
		1570 N/mm ²	1770 N/mm ²
2	1		1.48
3	2.26		3.33
4	4.02		5.92
5	6.28		9.25
6	9.04		13.3
7	12.3		18.1
8	16.1	21	23.7
9	20.3	26.6	30
10	25.1	32.8	37
12	36.1	47.3	53.3
14	49.2	64.3	
16	64.3	84	

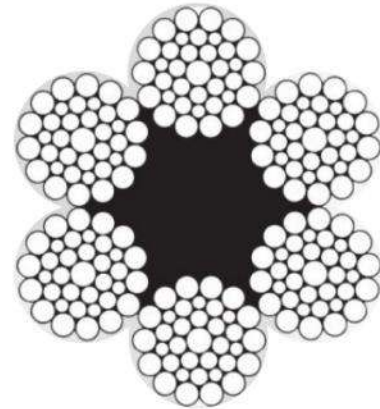

6 X 36 FC

NOMINAL TENSILE STRENGTH

NOMINAL DIAMETER (MM)	APPROX WEIGHT (KG/100M)	MINIMUM BREAKING STRENGTH (kN)	
		1570 N/mm ²	1770 N/mm ²
12	54.7	74.7	84
14	74.5	101	114
16	97.3	133	149
18	123	168	189
20	152	203	233
22	184	250	282
24	219	298	336
26	257	340	394
28	298	405	457
30	342	466	525
32	389	530	598
34	439	598	675

CHAINS



GRADE 80 CHAIN



GI CHAIN

DIA (MM)	PITCH (MM)	INSIDE WIDTH (MM)	OUTSIDE WIDTH (MM)	NET WEIGHT (KG/MTR)
8	24	10.8	26.8	1.4
10	30	14	34	2.2
13	39	17.5	43.5	3.8
16	48	21.5	53.5	7.3
20	60	27	67	9
22	66	30	74	10.9
26	78	35	87	15.2
32	96	40	104	23

SIZE (MM)	OD (MM)	ID (MM)	NET WEIGHT (KG/MTR)
6	36*21	26*11	20
8	51*38	37*14	35
10	55*33	37*15	52
12	65*40	42*18	84
16	92*54	63*24	142
20	112*67	76*31	168
22	136*79	93*36	225
24	155*92	110*44	270
32	210*110	162*48	540

FLAT POLYESTER SLING




WEBBING WIDTH	PLY	SWL/WLL	STRAIGHT LIFT 100%	BASKET LIFT 100%	140% 7-45°	CHOKER LIFT 80%	100% 45-60°
25MM	SINGLE PLY	500KG	500KG	1000KG	700KG	400KG	500KG
	DOUBLE PLY	1000KG	1000KG	2000KG	1400KG	800KG	1000KG
	THREE PLY	1500KG	1500KG	3000KG	2100KG	1200KG	1500KG
	FOUR PLY	2000KG	2000KG	4000KG	2800KG	1600KG	2000KG
50MM	SINGLE PLY	1000KG	1000KG	2000KG	1400KG	800KG	1000KG
	DOUBLE PLY	2000KG	2000KG	4000KG	2800KG	1600KG	2000KG
	THREE PLY	3000KG	3000KG	6000KG	4200KG	2400KG	3000KG
	FOUR PLY	4000KG	4000KG	8000KG	5600KG	3200KG	4000KG
75MM	SINGLE PLY	1500KG	1500KG	3000KG	2100KG	1200KG	1500KG
	DOUBLE PLY	3000KG	3000KG	6000KG	4200KG	2400KG	3000KG
	THREE PLY	4500KG	4500KG	9000KG	6300KG	3600KG	4500KG
	FOUR PLY	6000KG	6000KG	12000KG	8400KG	4800KG	6000KG
100MM	SINGLE PLY	2000KG	2000KG	4000KG	2800KG	1600KG	2000KG
	DOUBLE PLY	4000KG	4000KG	8000KG	5600KG	3200KG	4000KG
	THREE PLY	6000KG	6000KG	12000KG	8400KG	4800KG	6000KG
	FOUR PLY	8000KG	8000KG	16000KG	11200KG	6400KG	8000KG
125MM	SINGLE PLY	2500KG	2500KG	5000KG	3500KG	2000KG	2500KG
	DOUBLE PLY	5000KG	5000KG	10000KG	7000KG	4000KG	5000KG
	THREE PLY	7500KG	7500KG	15000KG	10500KG	6000KG	7500KG
	FOUR PLY	10000KG	10000KG	20000KG	14000KG	8000KG	10000KG
150MM	SINGLE PLY	3000KG	3000KG	6000KG	4200KG	2400KG	3000KG
	DOUBLE PLY	6000KG	6000KG	12000KG	8400KG	4800KG	6000KG
	THREE PLY	9000KG	9000KG	18000KG	12600KG	7200KG	9000KG
	FOUR PLY	12000KG	12000KG	24000KG	16800KG	9600KG	12000KG
200MM	SINGLE PLY	4000KG	4000KG	8000KG	5600KG	3200KG	4000KG
	DOUBLE PLY	8000KG	8000KG	16000KG	11200KG	6400KG	8000KG
	THREE PLY	12000KG	12000KG	24000KG	16800KG	9600KG	12000KG
	FOUR PLY	16000KG	16000KG	32000KG	22400KG	12800KG	16000KG
250MM	SINGLE PLY	5000KG	5000KG	10000KG	7000KG	4000KG	5000KG
	DOUBLE PLY	10000KG	10000KG	20000KG	14000KG	8000KG	10000KG
	THREE PLY	15000KG	15000KG	30000KG	21000KG	12000KG	15000KG
	FOUR PLY	20000KG	20000KG	40000KG	28000KG	16000KG	20000KG
250MM	SINGLE PLY	6000KG	6000KG	12000KG	8400KG	4800KG	6000KG
	DOUBLE PLY	12000KG	12000KG	24000KG	16800KG	9600KG	12000KG
	THREE PLY	18000KG	18000KG	36000KG	25200KG	14400KG	18000KG
	FOUR PLY	24000KG	24000KG	48000KG	33600KG	19200KG	24000KG



CLEVIS SLING HOOK

CHAIN DIA (MM)	WORKING LOAD LIMIT (TONNES)
8	2.00
10	3.15
13	5.30
16	8.00
20	12.5
22	15.00

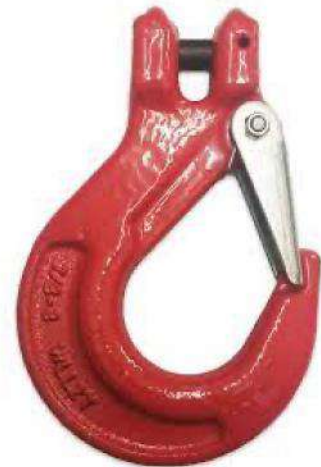

EYE SLING HOOK WITH LATCH



CHAIN DIA (MM)	WORKING LOAD LIMIT (TONNES)
8	2.00
10	3.15
13	5.30
16	8.00
20	12.5
22	15.00
26	21.20
32	31.50

HOOK LATCH, ZINE PLATED STEEL OR STAINLESS STEEL

HOOK SIZE(TON)		TOP WIDTH INCH	END WIDTH INCH	O.L INCH	N.W. LBS
CARBON STEEL	ALLOY STEEL				
1/2	3/4	0.36	0.51	1.30	0.02
3/4	1	0.41	0.59	1.46	0.02
1	1-1/2	0.41	0.67	1.84	0.02
1-1/2	2	0.49	0.75	1.84	0.03
2	3	0.49	0.87	2.02	0.03
3	4-1/2	0.63	1.00	2.41	0.06
5	7	0.71	1.42	2.99	0.11
7-1/2	11	0.79	1.57	3.68	0.17



CLEVIS LINK



W.L.L (TON)	SIZE(MM)
2.00	8
3.15	10
5.30	13
8.00	16

GRADE 80 CONNECTING LINK EUROPEAN TYPE

SIZE mm	W.L.L. ton	N.W. kg
5-6	1.00	0.095
6-7	1.20	0.14
7-8	2.00	0.20
10	3.20	0.38
13	5.40	0.76
16	8.20	1.10
18-20	12.50	1.80
22	15.25	3.20
26	21.25	4.50
32	32.20	9.00




SHORTENER LINK



W.L.L (TON)	SIZE(MM)
2.00	8
3.15	10
5.30	13
8.00	16
12.50	20
15.00	22

MASTER LINK

W.L.L (TON)	SIZE(MM)
1.6	6
2.12	8
3.15	10
5.30	13
8.00	16
11.20	18
21.20	22
31.50	26

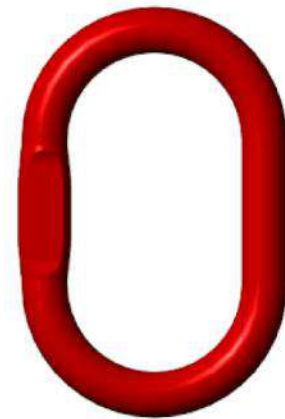

MASTER LINK ASSEMBLY



W.L.L (TON)	SIZE(MM)
3.15	6
4.25	8
6.70	10
8.00	12
11.20	13
17.00	16
23.60	20
31.50	22

SS SWIVEL EYE AND EYE

SIZE mm	W.L.L. kgs	O.L. mm	N.W. kg
3/16	300	2-5/16	0.04
1/4	600	2-9/16	0.05
5/16	1100	3-5/8	0.12
3/8	1540	4-5/8	0.25
1/2	2640	6	0.62
5/8	4750	7-3/8	0.95
3/4	7100	8-1/2	2.08
7/8	9600	9-1/4	2.25
1	11900	11	4.45



JAW END SWIVEL

W.L.L (TON)	SIZE(MM)
1.02	10
1.63	12
2.36	16
3.27	19
4.54	22
5.67	25

STAINLESS STEEL DUPLEX CLIP

SIZE mm	b mm	d mm	h mm	i mm	N.W. kg/100PCS
2	4.0	M3.5	5.0	30.0	1.0
3	7.0	M3.5	7.0	35.0	1.3
4	8.0	M4.5	7.5	40.0	2.3
5	10.0	M5.0	8.0	50.0	2.8
6	12.0	M6.0	10.0	60.0	5.5
8	17.5	M7.5	12.0	75.0	9.6
10	21.0	M9.5	16.0	94.0	19.5



U.S. TYPE 6063 ALUMINIUM SLEEVE



SIZE mm	N.W. kg/100pcs
1/16	0.05
5/64	0.07
3/32	0.15
1/8	0.30
5/32	0.40
3/16	0.70
7/32	0.95
1/4	1.00
9/32	1.40
5/16	2.20
3/8	3.00
7/16	6.00
1/2	8.40
5/8	11.00
3/4	27.50
7/8	28.00
1	41.00

GALV TURN BUCKLE

THICKNESS (MM)	TAKE UP (MM)	NET WEIGHT (KGS/100)
6	110	11
6	110	11
6	110	258
8	110	20
8	110	20
8	110	264
10	125	28
10	125	28
10	125	311
12	125	43
12	125	43
12	125	324
16	170	100
16	170	100
16	170	427
20	200	160
20	200	160
20	200	490
24	255	280
24	255	280
24	255	630



FORGED TURN BUCKLE



W.L.L (TONNES)	A (IN)	TAKE UP (IN)	WEIGHT (KG)
1	1/2	12	1.5
1.2	5/8	12	2.56
2.2	3/4	18	3.65
5	1	18	8.95
6	1 1/4	24	13
8.5	1 1/2	24	18.4
10	1 3/4	24	28

D SHACKLE SCREW PIN

SIZE inch	W.L.L. KGS	PIN DIA. inch	I.L. inch	N.W. lbs
1/4	1/2	5/16	7/8	0.11
5/16	3/4	3/8	1-1/32	0.17
3/8	1	7/16	1-1/4	0.24
7/16	1-1/2	1/2	1-7/16	0.40
1/2	2	5/8	1-5/8	0.59
5/8	3-1/4	3/4	2	1.21
3/4	4-3/4	7/8	2-3/8	2.25
7/8	6-1/2	1	2-13/16	3.16
1	8-1/2	1-1/8	3-3/16	4.47
1-1/8	9-1/2	1-1/4	3-9/16	6.75
1-1/4	12	1-3/8	3-15/16	9.06
1-3/8	13-1/2	1-1/2	4-3/8	11.60
1-1/2	17	1-3/4	4-13/16	15.95
1-3/4	25	2	5-3/4	26.75
2	35	2-1/4	6-3/4	42.31
2-1/2	55	2-3/4	8	71.75



SHACKLE BOLT/NUT



W.L.L. TONS	A MM	B MM	C MM	D BOW MM	D DEE MM	2E MM	NET WEIGHT (KG/NOS)
0.5	7	8	12	29	-	20	0.07
0.75	9	10	13.5	32	-	21	0.13
1	10	11	17	36.5	-	26	0.17
1.5	11	12	18.5	43	-	29	0.25
2	13.5	16	22	51	43	32	0.44
3.25	16	19	27	64	51	43	0.79
4.75	19	22	31	76	59	51	1.26
6.5	22	25	36	83	73	58	1.88
8.5	25	28	43	95	85	68	2.78
9.5	28	32	47	108	90	75	3.87
12	32	35	51	115	94	83	5.26
13.5	35	38	57	133	115	92	6.94
17	38	42	60	146	127	99	8.79
25	45	50	74	178	149	126	14.99
35	50	57	83	197	171	138	20.65
55	65	70	105	254	203	180	41.05
85	75	80	127	330	230	190	62.24
120	90	95	146	381	267	238	110

STAINLESS STEEL TWIST SHACKLE

SIZE mm	W.L.L. kgs	O.L. mm	N.W kg
5/32	90	1-1/32	0.017
3/16	100	1-1/4	0.020
1/4	150	1-9/16	0.034
5/16	250	1-7/8	0.080
3/8	500	2-7/16	0.150
1/2	600	2-7/8	0.240



ROLLER SHACKLE



SIZE mm	W.L.L. ton	N.W. kg
25	3.0	2.5
28	4.0	3.7
32	5.0	5.8

GRADE 80 CLEVIS GRAB HOOK

CHAIN SIZE inch	W.L.L. lbs	DIMENSIONS (inch)				N.W. lbs
		A	B	C	H	
1/4	3500	0.37	1.10	2.56	0.38	0.62
3/8	7100	0.47	1.32	3.25	0.50	1.26
1/2	12000	0.57	1.61	4.19	0.62	3.45
5/8	18100	0.81	2.05	5.03	0.75	5.64
3/4	28300	0.88	2.71	5.95	0.88	10.69



LARGE BOW SHACKLE



SIZE inch	W.L.L. KGS	I.L. inch	N.W. lbs
5	80	19	0.019
6	100	25	0.034
8	200	32	0.070
10	320	38	0.130
12	520	51	0.260
16	200	64	0.500
20	1100	76	0.800
22	1500	89	1.300
25	2100	100	2.000
28	3000	115	3.100
32	3500	127	4.300
38	5000	152	7.000
45	7000	180	12.500
52	8000	200	17.500

DIE CASTING DOUBLE PULLEY WITH SWIVEL, ZINC ALLOY, ZINC PLATED OR NICKEL PLATED

SIZE. inch	ROPE DIA. inch	N.W. kg/100PCS
1/2	1/8	4.0
3/2	3/16	4.8
1	1/4	8.0
1-1/4	5/16	17.0
1-1/2	7/16	17.5




PLASTIC CHAIN



SIZE. mm	WIRE mm	I.L. mm	I.W. mm	W.L.L. KN	M.B.S kg
6	ø6	28	7.3	6.1	10.98
8	ø8	36	10.0	12.5	22.5
10	ø10	63	14.0	14.0	25.2

DIE CASTING SWIVEL SNAP, ZINC ALLOY, NICKEL PLATED

SIZE. mm	O.L. mm	N.W. kg/100PCS
3/8	51	1.00
1/2	51	1.10

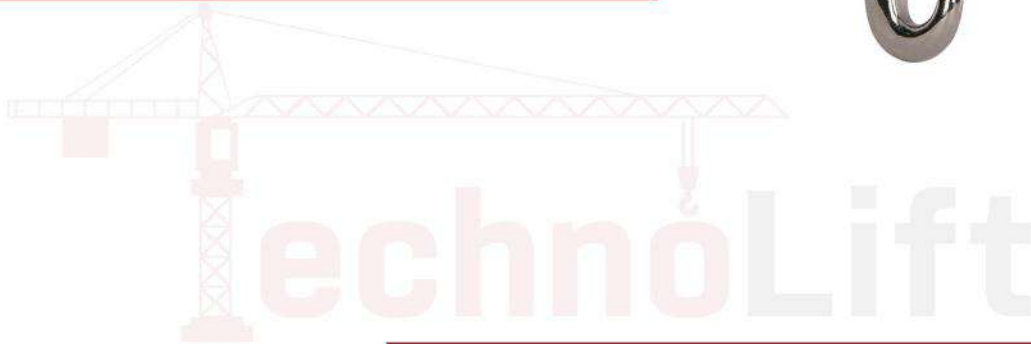

DIE CASTING SINGLE PULLEY WITH SWIVEL



SIZE. inch	ROPE DIA. inch	N.W. kg/100PCS
1/2	1/8	2.3
3/2	3/16	2.4
1	1/4	4.8
1-1/4	5/16	11.0
1-1/2	3/8	11.5
2	7/16	21.0

DIN 741 MALLEABLE WIRE ROPE CLIP WITH GROOVE, ZINC PLATED

SIZE inch	N.W. lbs/100pcs
3	1.40
5	1.50
6	2.10
8	4.10
10	6.80
11	7.20
12	10.00
13	13.00
14	13.50
16	21.00
19	28.00
22	40.00
26	44.00
30	66.00
34	85.00
40	104.00



DROP FORGED WIRE ROPE CLIP, H.D.G



SIZE inch	N.W. lbs/100pcs
1/8	6.00
3/16	10.00
1/4	20.00
5/16	30.00
3/8	47.00
7/16	76.00
1/2	80.00
9/16	104.00
5/8	106.00
3/4	150.00
7/8	212.00
1	260.00
1-1/8	290.00
1-1/4	430.00
1-3/8	460.00
1-1/2	540.00
1-5/8	700.00
1-3/4	925.00
2	1300.00
2-1/4	1600.00

STAINLESS STEEL WIRE ROPE CLIP

SIZE inch	N.W. kg
1/8	0.023
3/16	0.041
1/4	0.083
5/16	0.142
9/8	0.193
7/16	0.325
1/2	0.345
9/16	0.450
5/8	0.460
3/4	0.690
7/8	1.110
1	1.50



STAINLESS STEEL STANDARD WIRE ROPE THIMBLE



SIZE inch	N.W. kg
1/8	0.015
3/16	0.015
1/4	0.015
5/16	0.019
3/8	0.031
1/2	0.060
5/8	0.167
3/4	0.262
7/8	0.403
1	0.476

STANDARD TYPE THIMBLE ZINC PLATED

SIZE inch	N.W. kg/100pcs
6	2.30
8	4.50
10	8.90
12	10.80
14	13.00
16	17.30
20	21.30
22	30.00
24	58.80
28	91.70




U - BOLT, ZINC PLATED



SIZE inch	O.L. mm	RING SIZE mm	N.W. kg
1/4	113	20	3.15
1/4		25	3.55
1/4		32	4.10
5/16		38	8.30
5/16		50	9.50
5/16		60	10.70

RING BOLT, IRON THREAD, ZINC PLATED

SIZE inch	O.L. mm	RING SIZE mm	N.W. kg
5/16	90	7X50	0.13

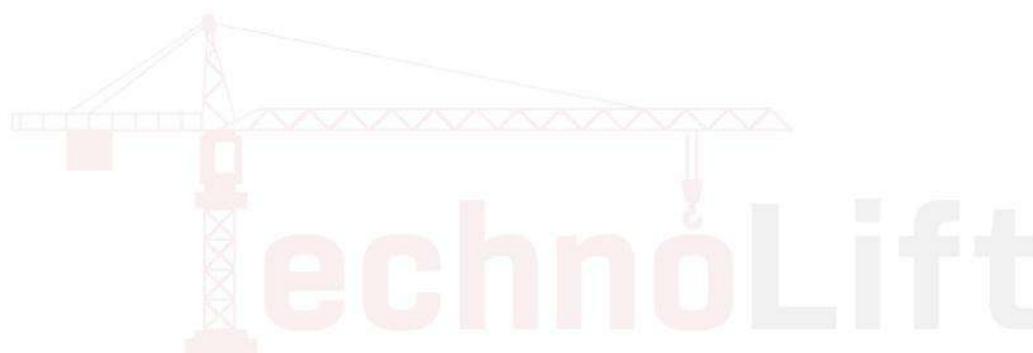

RING BOLT, WITH ONE NUT, ZINC PLATED




SIZE inch	O.L. mm	RING SIZE mm	N.W. kg
5/16	113	7X50	0.13

EYE NUT DIN 582, ZP

SIZE inch	W.L.L. KGS	N.W. KG/100pcs
6	70	4.90
8	140	5.00
10	230	9.00
12	340	16.00
16	700	24.50
20	1200	36.00
22	1500	58.00
24	1800	72.00
27	2500	80.00
30	3600	132.00
33	4300	130.00
36	5100	208.00



**EYE NUT FORGED CARBON STEEL,
SELF COLORED OR HOT DIPPED GALVANIZED**

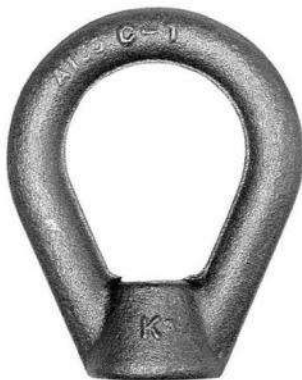

STOCK SIZE inch	STD.TAP SIZE inch	W.L.L. lbs	O.L. inch	N.W. lbs
1/4	1/4	520	1-11/16	0.09
1/4	5/16	850	1-11/16	0.09
5/16	3/8	1250	2-1/16	0.18
3/8	7/16	1700	2-1/2	0.29
3/8	1/2	2250	2-1/2	0.28
1/2	5/8	3600	3-3/16	0.58
5/8	3/4	5200	3-7/8	1.00
3/4	7/8	7200	4-5/16	1.70
7/8	1	10000	5	2.75
7/8	1-1/8	12300	5	2.75
1	1-1/4	15500	5-3/4	3.85
1-1/8	1-3/8	18500	6-1/4	5.00
1-1/4	1-1/2	22500	6-3/4	6.70
1-1/2	2	40000	10	18.70

EYE SCREW DIN 580, ZP

SIZE inch	W.L.L. KGS	N.W. KG/100pcs
6	70	5.00
8	140	6.00
10	230	11.00
12	340	18.00
14	490	28.00
16	700	28.50
20	1200	45.00
22	1500	67.00
24	1800	87.00
27	2500	88.00
30	3600	166.00
33	4300	172.00
36	5100	265.00



FIST GRIP CLIPS



SIZE mm	b mm	h1 mm	h2 mm	l mm
6	27	18	34	33
9	32	24	46	36
12	40	30	56	47
16	47	35	67	55
20	54	46	89	63
25	69	51	110	72

DELTA SHAPED QUICK LINK, ZINC PLATED

SIZE mm	W.L.L. lbs	N.W. kg/100pcs
3.5	200	0.92
5.0	330	2.30
6.0	550	4.02
8.0	1210	8.97
10.0	1320	15.52
12.0	2425	28.75
14.0	3970	40.25
16.0	4850	57.50



QUICK LINK, ZINC PLATED



SIZE inch	W.L.L. lbs	N.W. kg/100pcs
3.0	350	0.70
3.5	400	0.80
4.0	500	1.20
5.0	660	2.00
6.0	880	3.50
7.0	1300	6.50
8.0	1760	7.80
9.0	2200	11.00
10.0	2640	13.50
11.0	3000	18.50
12.0	3300	25.00
14.0	6100	35.00
16.0	7500	50.00

STAINLESS STEEL "C" LINK

SIZE mm	I.L. mm	N.W. kg/100pcs
6	24	0.017
8	32	0.040
9	33	0.055
10	35	0.075
12	48	0.126
13	52	0.166
14	55	0.210
16	64	0.317
19	76	0.532
20	76	0.640
22	88	0.820
25	100	1.300
28	114	1.610
32	132	2.500



"S" LIGHT HOOK, ZINC PLATED



SIZE mm	N.W. kg/100pcs
3	0.31
4	0.88
5	1.06
6	4.66
7	6.00
8	6.75
10	12.60
12	15.00

HAIR PIN, SINGLE OR DOUBLE TYPE, ZINC PLATED

SIZE inch	N.W. kg/100pcs
2.0	0.25
2.50	0.40
3.0	0.60
3.7	1.10
4.0	1.95
5.0	2.50
6.0	2.80



STAINLESS STEEL WELDED "D" RING



SIZE mm	I.W.OF EYE mm	N.W. kg100pcs
4	25	0.90
4	30	1.00
4	35	1.20
4	40	1.30
5	25	1.40
5	30	1.60
5	35	1.90
5	40	2.10
5	45	2.30
5	50	2.50
6	30	2.50
6	35	2.80
6	40	3.10
6	45	3.50
6	50	3.80
6	55	4.40
6	60	4.70
8	50	7.20
8	60	8.20

WELDED ROUND RING, ZINC PLATED

SIZE inch	N.W. kg/100pcs
3X25	0.50
4X25	0.91
4X30	1.07
4X40	1.39
5X30	1.73
5X40	2.23
5X50	2.58
6X30	2.72
6X40	3.27
6X50	3.99
6X60	4.69
7X35	4.20
8X40	6.06
8X50	7.32
10X50	11.85
10X70	15.80
12X60	20.50
12X100	31.80



RECTANGULAR SNAP HOOK, ZINC PLATED



SIZE mm	W.L.L. lbs	N.W. kg/100pcs
5X50	220	1.75
6X60	260	2.55
8X80	500	5.70
10X100	770	13.60
11X120	950	18.50

SNAP HOOK WITH SCREW, ZINC PLATED

SIZE mm	W.L.L. lbs	N.W. kg/100pcs
4X40	200	1.50
5X50	220	2.00
6X60	260	3.00
7X70	400	5.00
8X80	500	7.50
9X90	550	9.80
10X100	770	16.00
11X120	990	21.00
12X140	1200	27.00
13X160	1400	36.00



SNAP HOOK WITH EYELET AND SCREW, ZINC PLATED



SIZE mm	W.L.L. lbs	N.W. kg100pcs
5X50	220	2.10
6X60	260	3.22
7X70	400	5.04
8X80	500	7.70
9X90	550	9.90
10X100	770	16.20
11X120	990	22.00
12X140	1200	28.00
13X160	1400	37.00

SNAP HOOK, ZINC PLATED

SIZE mm	W.L.L. lbs	N.W. kg/100pcs
4X40	200	1.20
5X50	220	1.80
6X60	260	2.80
7X70	400	4.50
8X80	500	7.00
9X90	550	9.00
10X100	770	14.40
11X120	990	19.20
12X140	1200	27.00
13X160	1400	35.00
14X180	1600	50.00



SNAP HOOK WITH EYELET, ZINC PLATED



SIZE mm	W.L.L. lbs	N.W. kg100pcs
4X40	200	1.50
5X50	220	2.00
6X60	260	3.00
7X70	400	5.00
8X80	500	7.50
9X90	550	9.80
10X100	770	16.00
11X120	990	21.00
12X140	1200	27.50
13X160	1400	35.80

ALUMINIUM SNAP HOOK, NORMAL TYPE

SIZE mm	N.W. kg/100pcs
5X50	0.5
6X60	0.9
7X70	1.6
8X80	2.5



ALUMINIUM SNAP HOOK, "D" TYPE



SIZE mm	N.W. kg/100pcs
5X50	0.5
6X60	0.9
7X70	1.6
8X80	2.5

PLOYTHENE (PE) AND POLYPROPYLENE (PP) ROPE 3 STRANDS

SIZE DIA	CONSTRUCTION	LENGTH OF COIL (YARDS)	STD.BREAKING LOAD (KGF)
6 MM	3 STRAND	200	610.00
8 MM	3 STRAND	200	1020.00
10 MM	3 STRAND	200	1530.00
12 MM	3 STRAND	200	2160.00
14 MM	3 STRAND	200	2850.00
16 MM	3 STRAND	200	3820.00
18 MM	3 STRAND	200	4590.00
20 MM	3 STRAND	200	5710.00
22 MM	3 STRAND	200	6830.00
24 MM	3 STRAND	200	8160.00
26 MM	3 STRAND	200	9170.00
28 MM	3 STRAND	200	10810.00
30 MM	3 STRAND	200	12030.00
32 MM	3 STRAND	200	13460.00
34 MM	8 STRAND	200	17330.00
36 MM	8 STRAND	200	19000.00
38 MM	8 STRAND	200	20390.00
40 MM	8 STRAND	200	29200.00
50 MM	8 STRAND	200	44100.00



SISAL ROPE, 3 STRANDS



SIZE mm	M.B.S kgs	N.W. kg/coil	LENGTH m/coil
6	300	7	220
8	425	12	220
10	560	15	220
12	840	23	220
16	1590	40	220
18	1890	48	220
20	2510	60	220

EYE SELF LOCKING SAFETY HOOK

CHAIN DIA (MM)	WORKING LOAD LIMIT (TONNES)
8	2.00
10	3.15
13	5.30
16	8.00
20	12.5
22	15.00




SWIVEL SELF LOCKING SAFETY HOOK



CHAIN DIA (MM)	WORKING LOAD LIMIT (TONNES)	NET WEIGHT (KGS/EACH)
8	2.00	1.1
10	3.15	2.0
13	5.30	4.0
16	8.00	7.3

JCD VERTICAL LIFTING CLAMP

RATED CAPACITY (T)	JAW OPENING (MM)	WEIGHT (KG)
1	0-22	4.5
2	0-32	6.8
3	0-36	11
5	0-50	17.2
10	0-90	38

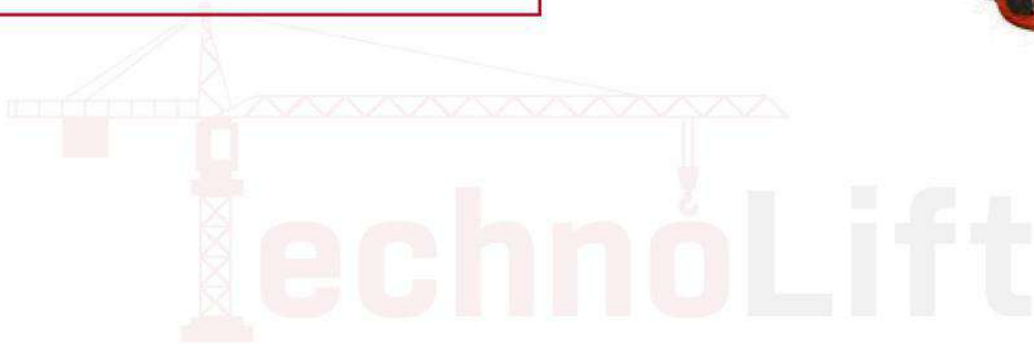

ECD VERTICAL LIFTING CLAMP



RATED CAPACITY (T)	JAW OPENING (MM)	WEIGHT (KG)
1	0-22	4.6
2	0-25	8
3	0-30	15
5	0-50	20.5
8	0-80	34

BEAM CLAMP

CAPACITY (KG)	ADJ. BEAM WIDTH (MM)	NET WEIGHT (MM)
1000	75-245	3.5
2000	75-245	4.5
3000	70-355	9.5
5000	70-355	11
10000	80-350	16



WIRE ROPE SLING WITH PRESSED LOOP AND SAFETY EYE HOOK



Rope o in mm	WLL single direct in kg
8	750
10	1300
12	1800
13	2100
14	2500
16	3300
19	4600
20	5100
22	6200
24	7400
26	8600
28	10000
32	13100
36	16600
38	18500
44	25000
52	35000

4-LEG WIRE ROPE SLING WITH SHACKLE

Rope Ø in mm	Load capacity 4 leg in kg at angle 0-45°
8	1500
10	2700
12	3780
13	4400
14	5250
16	6900
19	9700
20	10700
22	13000
24	15500
26	18000
28	21000
32	27500



2-LEG WIRE ROPE SLING WITH SWIVEL HOOK



Rope Ø in mm	Load capacity 2 leg in kg at angle 0-45°
8	1000
10	1830
12	2520
13	3000
14	3500
16	4600
19	6400
20	7100
22	8700
24	10300
26	12000
28	14000
32	18300

GRADE 80 LIFTING CHAIN

SIZE d x p mm	WIDTH(mm)		W.L.L. Ton	MPF KN	MBS KN	APPROX WEIGHT per meter
	inside a	outside b				
15X46	20.0	52.0	7.0	168.0	280.0	5.17
16X48	20.0	56.0	8.0	192.0	320.0	5.63
16X49	24.5	59.5	8.0	192.0	320.0	5.71
16X64	23.9	58.9	8.0	192.0	320.0	5.11
18X54	23.0	63.0	10.0	246.0	410.0	6.85
18X64	21.0	60.0	10.0	246.0	410.0	6.60
19X57	23.7	63.2	11.3	270.0	450.0	7.70
20X60	25.0	70.0	12.5	300.0	500.0	8.60
22X65	28.0	74.2	15.3	366.0	610.0	10.70
22X66	28.0	77.0	15.3	366.0	610.0	10.20
22X86	26.0	74.0	15.3	366.0	610.0	9.50
24X72	32.0	82.0	18.0	432.0	720.0	12.70
24X86	28.0	79.0	18.0	432.0	720.0	11.60
26X78	35.0	91.0	21.3	510.0	850.0	14.87
26X92	30.0	86.0	21.3	510.0	850.0	13.70
30X90	38.0	105.0	28.3	678.0	1130.0	19.60
30X108	34.0	98.0	28.3	678.0	1130.0	18.00
32X96	40.0	106.0	32.2	772.0	1286.0	22.29
34X126	38.0	109.0	36.3	870.0	1450.0	22.70
34X102	46.5	121.5	36.3	870.0	1450.0	25.50
36X108	49.5	128.5	40.7	978.0	1630.0	31.00
38X137	42.0	121.0	45.3	1086.0	1810.0	29.00
38X114	52.0	136.0	45.3	1086.0	1810.0	32.00
42X126	55.5	144.5	55.4	1332.0	2200.0	38.60




CARGO LASHING BELT



SIZE	LENGTH (MAR)	BREAKING STRENGTH	WEIGHT (KG)
1"	10,12,15	1000KG	0.6KG
2"	10,12,15	4000KG	2.5KG
2"	10	5000KG	2.5KG
3"	10,12,15	10000KG	7.2KG
4"	10,12,15	12000KG	9KG

CLAW LOAD BINDER

SIZE inch	W.L.L. lbs	MB.S. lbs	N.W. lbs
1/4-5/16	2600	9200	3.60
5/16-3/8	5400	19000	8.56
3/8-1/2	9200	28000	12.38

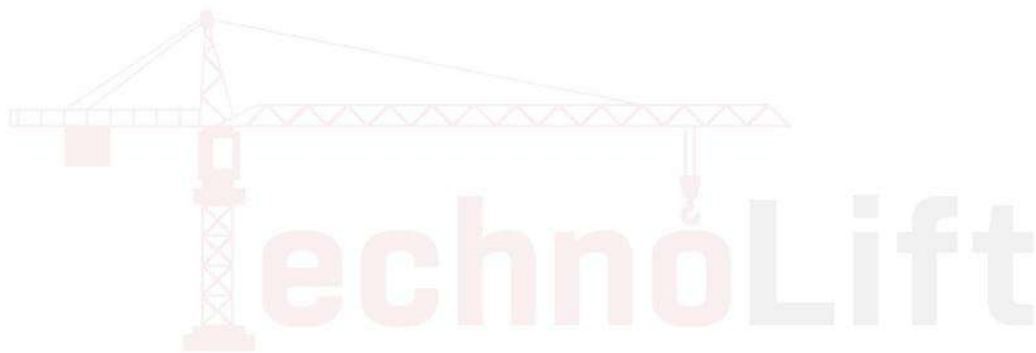

RATCHET TYPE LOAD BINDER



SIZE inch	W.L.L. lbs	MB.S. lbs	N.W. lbs
1/4-5/16	2600	9200	3.75
5/16-3/8	5400	19000	10.50
3/8-1/2	9200	33000	12.90
1/2-5/8	13000	46000	14.55


PLAIN TROLLEY

CAPACITY (KG)	MIN RADIUS OF CURVE (M)	I-BEAM WIDTH	NET WEIGHT (KG)
500	0.9	68-94	5.3
1000	1	68-100	7.5
1500	1.05	68-110	9
2000	1.1	116-140	11.2
3000	1.3	116-140	21
5000	1.4	140-180	30.5
10000	1.7	125-180	85



GEARED TROLLEY

CAPACITY (KG)	MIN RADIUS OF CURVE (M)	I-BEAM WIDTH	NET WEIGHT (KG)
500	0.9	68-94	7.8
1000	1	68-100	10.2
1500	1.05	68-110	12.5
2000	1.1	116-140	15.5
3000	1.3	116-140	25.5
5000	1.4	140-180	39.5
10000	1.7	125-180	100
20000	5	122-203	235

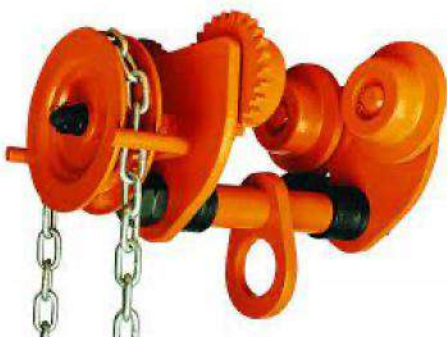

CHAIN BLOCK

CAPACITY TON	STANDARD LIFT (MTR)	NO.OF CHAIN	CHAIN DIA (MM)	NET WEIGHT (KG)	EXTRA WEIGHT PER METRE EXTRA LIFT (KG)
0.5	3	1	6	8.4	1.5
1	3	1	6	11	1.8
1.5	3	1	8	16.2	2.1
2	3	2	8	18.5	3.6
3	3	2	8	25.6	4.2
5	3	2	10	42.8	5.1
10	3	4	10	79.5	9.3
20	6	8	10	193	19.3
30	6	12	10	220	28.3
50	6	22	10	1092	50



ELECTRIC TROLLEY FOR ELECTRIC CHAIN HOIST

CAPACITY TON	STANDARD LIFT (MTR)	TEST LOAD (KN)	MOTOR POWER (KW)	IP RATINGS & VOLTS	NO.OF CHAINS	CHAIN DIA (MM)	LIFTING SPEED (M/MIN)	NET WEIGHT (KG)	I-BEAM SIZE (MM)
0.5	6	6.25	0.75	IP54 380V	1	6.3	6.9	89	58-153
1	6	12.5	1.5		1	7.1	6.9	103	58-153
2	6	25	3		1	7.1	6.8	164	82-178
3	6	37.5	3		1	11.2	5.4	183	100-178
5	6	62.5	3		2	11.2	2.7	234	100-178
7.5	6	94	3		3	11.2	1.8	266	100-178
10	6	125	3		4	11.2	2.7	335	150-220
20	6	250	3		8	11.2	1.5	546	150-220

ELECTRIC CHAIN BLOCK

CAPACITY TON	STANDARD LIFT (MTR)	TEST LOAD (KN)	MOTOR POWER (KW)	IP RATINGS & VOLTS	NO.OF CHAIN	DIA OF CHAIN (MM)	LIFTING SPEED (M/MIN)	NET WEIGHT (KG)
0.5	6	6.25	0.75	IP54 380V	1	6.3	6.9	43
1	6	12.5	1.5		1	7.1	6.9	62
2	6	25	3		1	7.1	6.8	70
3	6	37.5	3		1	11.2	5.4	117
5	6	62.5	3		2	11.2	2.7	146
7.5	6	94	3		3	11.2	1.8	200
10	6	125	3		4	11.2	2.7	330
20	6	250	3		8	11.2	1.5	546
30	6	375	3		12	11.2	1	1143



ELECTRIC MOTOR TROLLEY




CAPACITY TON	MIN RADIUS OF CURVE (M)	SPEED/50HZ (M/MIN)	I-BEAM WIDTH	NET WEIGHT (KG)
500	0.8	11/21	68-94	33
1000	0.8	11/21	68-100	33
1500	0.8	11/21	68-110	35
2000	1	11/21	116-140	63
3000	1.8	11/21	116-140	68

LIFTING EQUIPMENT



MINI ELECTRIC WIRE HOIST

CAPACITY (KG)	RATED VOLT (V)	LIFTING HEIGHT SINGLE/DOUBLE	LIFTING SPEED (M/MIN)	GW/N.W	PACKING SIZE (CM)
500/1000	220/230/240	12/6	8/4	32/33	62X24X35
500/1000	220/230/240	20/10	20/10	35/36	51X34X18
100/200	220/230/240	12/6	12/6	22/24	49X43X16
250/500	220/230/240	12/6	10/5	30/31	52X48X17

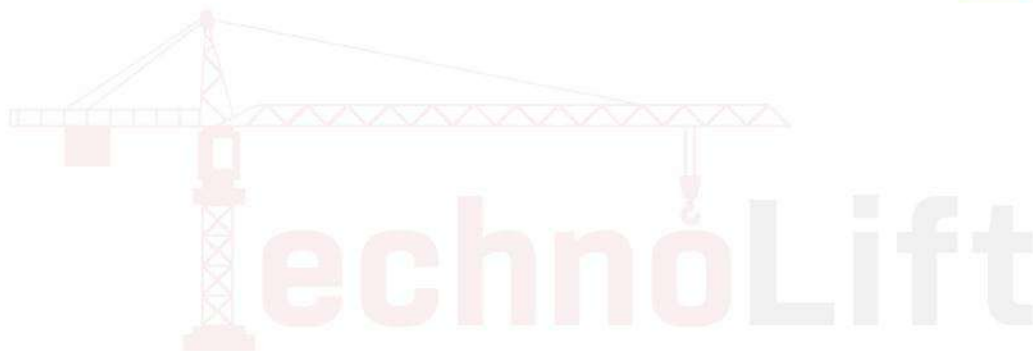

ELECTRIC WIRE ROPE HOIST



CAPACITY (KG)	LENGTHS (M)	LIFTING SPEED (M/MIN)	MOTOR POWER (KW)	TRAVELLING SPEED (M/MIN)	TRAVELLING MOTOR (KW)	WIRE ROPE DIA	WIRE ROPE CONSTRUCTION	NET WEIGHT (KG)
1000	30	8 8/0.8	1.5 0.2/1.5	20 30	0.2	7.7	D-6X37+1	180
2000	30	8 8/0.8	3 0.4/3	20 30	0.4	13	D-6X37+1	274
3000	30	8 8/0.8	4.5 0.4/4.5	20 30	0.8	13	D-6X37+1	322
5000	30	8 8/0.8	7.5 0.8/7.5	20 30	0.8	15	D-6X37+1	480



CONTACT US

Our Sales Team

✉ ebrahimyousuf53@gmail.com


📞 +971 4 224 0552

Ibrahim

📞 +971 55 876 6529

Mohammed

📞 +971 54 574 9304

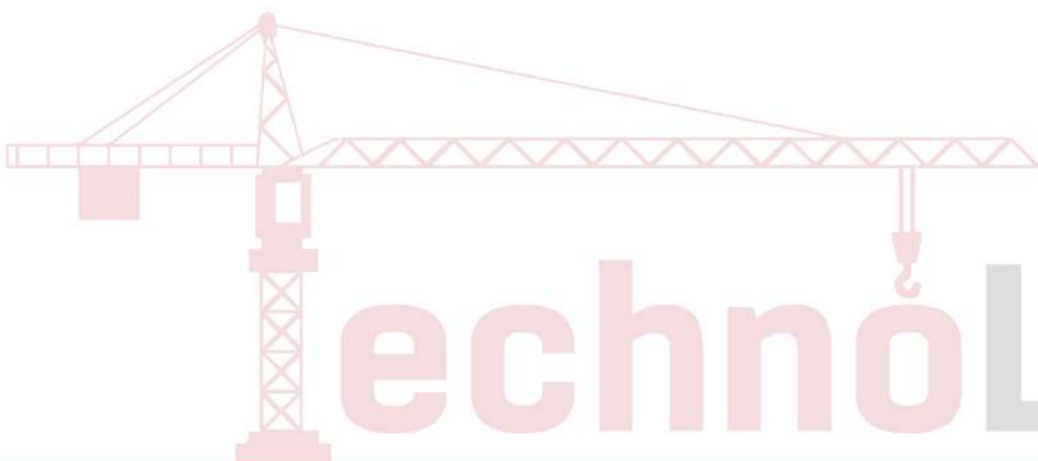

technoLift