

Junko

WAREHOUSE EQUIPMENTS





INDEX



LIFTING AND MATERIAL HANDLING



WEIGHING SCALES



HEAT SEALING MACHINES



PACKAGING MACHINES AND MATERIALS



BAG CLOSING MACHINES



BAG CLOSING MACHINE ACCESSORIES



WASTE DISPOSAL EQUIPMENT

SOLUTIONS: Today's fast paced business environment puts a demand on production companies to provide quality and market standards of packaging.

Efficient and effective systems in the warehouse can be upgraded by equipping the storage environment with quality equipment and materials.

SAFETY: With the goal of offering safe and reliable products we source only products that conform to established safety standards.

DURABILITY: At JUNKO we are proud to supply durable, long-lasting, reliable and aesthetically pleasing products and equipment for the needs of a warehouse.





Hydraulic pump includes overload relief valve. Pump bypasses at full height

Ergonomic handle



User friendly entry and exit wheels

PALLET TRUCK

Platform trolley for large load handling capacity. Comes with a PVC non-slip load surface. Tubular steel handles can be folded flat for minimal storage requirements and easy transport. Effective usage with handles and articulated steering wheels. Proven ergonomic design has been time tested for years of reliable service.

CAPACITIES 150kg, 300kg 500kg



Can be folded flat for minimal storage

PLATFORM TROLLEY

An economic way for one person to move heavy pallet loads without the use of a forklift truck!

Effective usage with handles and articulated steering wheels. Proven ergonomic design has been time tested for years of reliable service.

CAPACITIES 2.5 TONS, 3.0 TONS



PLASTIC PALLETS

- Reusable, recyclable and environmentally friendly. Perfect for pharmaceutical and food grade quality industries.
- Suitable for strict hygiene environments and resistant to contamination.
- No cleaning of wood debris on warehouse floor. Improved hygiene standards with a non-porous surface that is impervious to acids, fats and odours.
- Lower the risk of product damage with no nails or splinters.
- Increase equipment compatibility within the supply chain infrastructure through consistent design and weight.

Low Maintenance

Quality Built

User Friendly

BUNDED SPILL PALLET



NESTING PALLET



INJECTION PLASTIC PALLET





TABLE TOP WEIGHING SCALE

CAPACITY-kg	ACCURACY-g	PAN SIZE-mm
10, 20, 30	1, 2, 5	250 x 280

(Comes with LED Display)



TABLE TOP WEIGHING SCALE

CAPACITY-kg	ACCURACY-g	PAN SIZE-mm
1, 2, 5	0.1, 0.2, 0.5	225 x 175
6	1	225 x 175

(Waterproof Table Top Scale also available)



PLATFORM SCALE

CAPACITY-kg	ACCURACY-g	PAN SIZE-mm
50, 60, 75,	5, 10, 10	400 x 400
100	5, 10, 10	400 x 400
100,150, 10, 20		450 x 550
100, 200, 300	10, 20, 50	500 x 500
100, 200, 300,	10, 20, 50	600 x 600
200, 300	20, 50	600 x 500
500, 600	50, 100	750 x 750
300, 500, 600	50, 50, 100	900 x 900
600, 1000	100,100	1000 x 1000
1000	100, 200	1000 x 1000



BATHROOM WEIGHING SCALE

A wide range of electronic personal scale covers a full spectrum of innovative state of the art designs to suit different environment settings, and different personal needs. Using high precision strain gauge sensor that can measure weight division as low as 50 gram. Easy to read LCD and simple user-friendly operation.



COUNTER SCALE

CAPACITY-kg	ACCURACY-g	PAN SIZE-mm
5, 10, 20	5	

PLATFORM SCALE FOR HANGING LOAD

CAPACITY-kg	ACCURACY-g	PAN SIZE-mm
100	50	490 x 340
300	100	630 x 400
500	100	660 x 620



HEAVY DUTY PLATFORM SCALE

CAPACITY-kg	ACCURACY-g	PAN SIZE-mm
1000	100	1000 x 1000
1000	100	1200 x 1200
2000	100	1200 x 1200
3000	100	1200 x 1200
5000	100	1200 x 1200
10000	100	1500 x 1500



4-Load Cell Platform Scale

HEAT SEALING MACHINES



HAND IMPULSE SEALER WITH CUTTER

Our hand sealers seal and also cuts poly bags and any thermoplastic material such as polyethylene (PE) and polypropylene (PP) quickly and efficiently. No warm up time is needed.

- Voltage(v/Hz): AC 220 / 50 / 110 / 60
- Impulse Power (W): 260 / 430 / 600
- Sealing Length (mm) : 200 / 300 / 400
- Sealing Width (mm): 2 / 3 / 3
- Film Width (mm): 0.2 / 0.3 / 0.3
- Heat Time (seconds) 0.2 - 1.3
- Dim(L x M x H): 325 x 75 x 225 / 440 x 83 x 255 / 540 x 85 x 280
- Net Weight: 2.1 / 3.7 / 4.4



HAND IMPULSE SEALER

Our hand sealers seal poly bags quickly and efficiently. No warm up time is needed.

- Source(v): 110/220v, 110/220v, 110/220v
- Max Seal Length): 200mm / 300mm / 400mm
- Max Seal Thickness : 0.2mm (single side) / 0.2mm (single side) / 0.2mm (single side)
- Heating Time: 0.2 - 1.0sec / 0.2 - 1.0 sec / 0.2 - 1.0 sec



BD-7 BAND SEALER

Horizontal standard type automatic band sealer

- Equipped with speed controller and digital temperature control.
- Gusset roller is attached as standard
- Conveyor moves 60mm horizontally toward operator.
- Machine Dimensions: 885 x 511 x 885 mm
- Weight: 60kg
- Power Acquired: AC220V 1000W
- Seal Width: Max. 8mm
- Bag Width: Band Seal



TABLE TOP SEALER

It's ideal for materials testing and quantifying the optimum heat sealing parameters for heat seal or heat seal/cut applications. Used to seal or manufacture polyethylene, foil coated poly or paper/poly bags and pouches.

- Max Seal Length: 450mm x 600mm
- Seal Width: 5mm x 10mm
- Max Seal Thickness: 1.0mm / 1.0mm
- Heat Time: 02 - 3.0 sec / 02 x 3.0 sec
- Congealed Time: 1.0 - 8.0(sec) / 1.0-8.0 (sec)
- Weight: 20kg / 22kg
- Dimensions: 53 x 36 x 20cm / 68 x 36 x 20cm



BAND SEALER

This is useful for basic plastic sealing applications. Our Band sealers seal poly bags and any thermoplastic material such as polyethylene (PE) and polypropylene (PP) quickly and efficiently. No warm up time is needed.

Materials up to 40" wide and 10 mil thick can be sealed depending on the sealer model. A signal light indicates the heat cycle is complete and the seal is done.



FOOT PEDAL SEALER

A foot pedal (hands free) sealer comes complete with a pedestal, stand, adjustable work table, and foot control. These units are inexpensive efficient work horse packaging machines that can seal a wide variety of packages from small single portion packets up to large heavy duty.

- Source: 110/220v, 110/220v, 110v/220v
- Max Seal Length (mm): 350 / 450 / 650
- Heat Time (sec): 0.2-3 / 0.2-3 / 0.2-3
- Max Seal Thickness: 0.4 / 0.4 / 0.4



BATTERY POWERED PLASTIC STRAPPER

This tool is a compact tool, very light, with very good ergonomics, well balanced and easy to use. It is user friendly and complies with the European Safety Regulations EN415-8.

Strapping qualities:	PP & PET
Strapping dim.(Widths):	9.0 - 13.0 mm / 3/8 - 1/2"
Thicknesses:	0.35 - 0.80 mm / .015 - .031"
Weight:	3.4 kg / 7.5 lbs (including battery)
Dimension:	L330 x W122 x H130 mm / 13.0" x 4.8" x 5.1"
Average seal strength:	approx. 75 % (dependent on strap quality)
Strap tension:	150 - 800 N / 35 - 180 lbs (adjustable)
Tensioning speed:	150 - 300 mm/s / 5.9 - 11.8 inch/s
Power supply:	Battery Li-Ion 18VDC / 2.0Ah (Standard)
Battery	Li-Ion 18VDC / 4.0Ah



MANUAL OPERATED PLASTIC STRAPPER

Both models are light-weight devices, suitable for strapping and sealing flat packaged goods (e.g. pallets, bales, crates and packages of all kinds) with plastic strap. They are characterised by reliability, strength, and maintenance-friendliness and can also be used outdoors as portable device. Strapping qualities: PP & PET

Strapping widths (1)/(2)	11.0mm - 13.0mm / 15.0mm - 16.0mm
Thicknesses: (1)/(2)	0.40mm - 0.90mm / 0.50mm - 0.90mm
Weight: (1)/(2)	3.3kg / 3.8kg
Dimension: (1)/(2)	L337 x W105 x H149 mm / L376 x W128 x H244 mm
Average Seal Strength	up to 70 % up to 70 % (dep. on strap quality)

MANUAL PLASTIC TENSIONER

- Superior design and performance.
- Premium copper bushings.
- Built-in strapping cutter.
- For use with open seals or buckles.

Strap Type	Plastic
Seal Type	N/A
Strap Width	9 - 19mm



COMPOSITE STRAPPING TOOL WITH BINDER

Handy light weight sealless combination tool to strap flat packages (i.e. pallets, bales, crates, cases, various packages) Permits a very easy and efficient operation and outperforms other strapping tools by its ruggedness and its high reliability. The sealless joint reduces the overall strapping costs by approx. 10% through the elimination of the seals.

Strap Type	Composite
Seal Type	N/A
Width	9-19mm / 12-19mm / 16-19mm / 25 - 40mm
Thickness	N/A / 0.50 - 1.00mm / N/A



MANUAL SEALLESS STEEL STRAPPER

Handy light weight sealless combination tool to strap flat packages (i.e. pallets, bales, crates, cases, various packages) Permits a very easy and efficient operation and outperforms other strapping tools by its ruggedness and its high reliability. The sealless joint reduces the overall strapping costs by approx. 10% through the elimination of the seals.

Strapping qualities:	Uniflex regular duty max. 850 N/mm2 / 123'000 psi
Strapping widths	9.5 - 13.0 mm / 3/8 - 1/2"
Thicknesses	0.38 - 0.50 mm / .015 - .020"
Weights:	3.3 kg / 7.3 lbs Normal version 3.7 kg / 8.1 lbs TW version
Average seal strength:	approx. 80 %
TW-version available:	Torque wrench tensioning system
Suspension (Optional):	Bolt and grip ball for horizontal applications; have to be ordered separately

MANUAL STEEL STRAPPING TOOL

Pusher type combination. Very suitable for strapping of bars, bundles, tubes coils and items with a small surface. Independent from any energy source since operated manually.

Strapping qualities:	Uniflex and Ultraflex max. 1100 N/mm2 / 160'000 psi
Strapping Widths:	9.5 - 13.0 mm / 3/8 - 1/2"
Thicknesses	0.38 - 0.63 mm / .015 - .025"
Weights:	3.4 kg / 7.5 lbs
Average seal strength:	approx. 75 %
Seals	Overlap seals
Type of Joint	Single notch joint



PP STRAP DISPENSER

The pet strap dispenser trolley is designed to provide industrial worksites with a handy unit for storing polypropylene straps and seals in an organized and easy to access manner. The unit is mobile, making it easy to effortlessly transfer from one station to the next. Ideal for application of plastic strap for flat surfaces.





SEMI AUTOMATIC STRAPPING MACHINE

- Power source: 200v / 50 Hz
- Packing Speed: «=1.5 second / cycle
- Militem coden. package size: 60mm
- Max package size: Unlimited
- Max tension force: 35kgs
- Applicable belt width: 6mm - 15mm
- Driving Motor: Single-phase1 / 4Hp
- Size (L x M x H): 895 x 565 x 735mm
- Net weight: 30 kgs
- Gross weight: 70 kgs
- Specification of paper roll: 200mm (Dia.) 200 mm



PET STRAP

With a consistent tensile strength and very high elongation, our PET strap offers low cost, durable and flexible alternative to traditional steel straps.



PP STRAP

Our Polypropelene or PP strap has a high break strength and is also recyclable. Comes in a variety of colors.

CLIPS AND BUCKLES

In order to secure products for sihipping we have available buckles for composite straps and clips for PP strapping. Strapping clips are a key part of the process, since they hold the straps in place and help maintain tension during transport.



COMPOSITE STRAP

Composite strap is high tenacity polyester yarns embedded in a polymer coating. Our composite straps are available in a wide variety of widths and strengths. We also have steel buckles for strong and consistent join.



CARPET BINDER TAPE

Strong carpet binder tape for carpet edging available a wide variety of colors and sizes.



PRINTED TAPE AND BOX SEALING TAPE

Box sealing tape to securely close cartons or cardboard boxes. We also have PRINTED TAPES and SPECIAL OFFER Tapes. Available in bulk quantities.



SHRINK WRAP

High quality plastic polymer film available in bulk quantities. Perfect for wrapping products in order to protect them or package multiple products together.



STRETCH FILM

Strong stretch film available in bulk quantities for wrapping pallets, boxes and hold products together for transportation and storage



CARTON SEALER

This machine is used for top and bottom sealing of cartons (secondary) using of BOPP Tapes.

FEATURES

- Used for wide range of carton dimensions
- Easy to change the carton dimensions
- Roller conveyors at input and output side
- Adjustable conveyor height
- Special belt conveyors giving firm grip
- Carton holding rollers
- Mounted on castor wheels
- MH FJ - Machine automatically adjusts heights and widths depending on carton size.



VACUUM SEALER

MACHINE SPECIFICATIONS

- Chamber size: 440×420×75mm(DZ400TE)
- Sealing-bar: 400×10mm
- Capacity: 20m³/h , Cycle time:10-25sec.
- Gas flush, Stainless steel body with flower printer, double sealing bar,
- Stainless-steel vacuum chamber
- Vacuum pump.
- Stainless-steel housing,
- High transparent lid.
- Voltage: 1phase 220V/50Hz
- Power: 0.9KW



AUTOMATIC STRETCH WRAPPER

Our FROMM stretch wrappers are extremely user-friendly and can be used in every situation. This machine highly suited to use by smaller-scale film users. Extra emphasis was placed during the design stage on safety and reliability. All the machines are designed to cope with a high workload

MACHINE SPECIFICATIONS

- European built machine
- Ø1.500mm turning table, chain driven
- Loading capacity 1.200kg
- Rotation speed controlled by frequency inverter
- Patented exact position stop

FILM CARRIAGE

- Patented mechanical brake system
- Core Ø76mm, film thickness from 9 to 35my
- Photocell for pallet height detection
- Speed controlled by frequency inverter
- Max pallet height 2.100mm

POWER SUPPLY

- 230 Volt, 50/60Hz, 1kW, 10A
- Working conditions + 5 up to + 45 0C
- Automatic programs, parameters can be adjusted



At JUNKO, we have a wide range of bag closing machines, spareparts and accessories. We offer a wide range of filled bag closing sewing machines from leading brands like Fischbein, Union Special, Newlong, Revo and Keestar. We carry a complete line of new and rebuilt sewing machines from portable machine for the low volume user to stationary machines for the large volume user.


We also have a complete inventory of parts, thread, tape, oil, etc. There are several options available which include power infeed units, conveyors, pedestals, tape attachments, automatic start/stop switches, electric photo-eyes and more.

MACHINES

- Bag Closing Machines
- Sewing Heads
- Conveyor Belts
- Sewing Systems
- Pedestals

ACCESSORIES

- Crepe Tape
- Thread
- Machine Oil
- Needles
- Spring Balancers
- Machine Spare parts

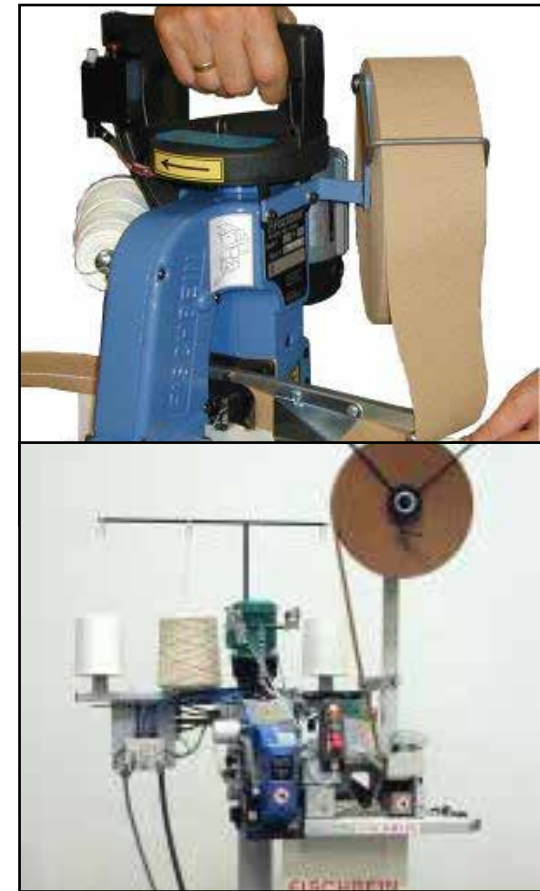

FISCHBEIN®

KEESTAR™

NEWLONG



ORGAN NEEDLES

JUKI®



U Union Special





BAG CLOSING THREAD

100% polyester bag closing thread with high tensile strength. This high quality has a low shrinkage rate and is knot free. It is safe for use in food industries. We also have 3-7% SILICONE TREATED bag closing thread.

TYPE: 100% Polyester

SIZE: 20s/6

WEIGHT: 150g, 200g, 250g, 1kg, 2kg 4kg

COLOR: Natural White, Red, Green, Blue



CREPE TAPE

Quality crepe tape for bag closing machine for stronger and attractive tape sewn bag closure.

SIZES: 50mm and 70mm

COLORS: Brown and White



NEEDLES

Our needles are made and imported from quality manufacturers like SCHMETZ, FISCHBEIN and ORGAN NEEDLES and GROZ-BECKERT. Available in different sizes and varieties for all bag closing and carpet over edging machines. Specially designed to handle a variety of bag materials to include multi-wall paper, woven polypropylene, laminated polypropylene, polyester and jute.



GROZ-BECKERT®

FISCHBEIN



SPRING BALANCER

We also sell intermediate-duty, heavy-duty, and super-duty spring balancer models to allow users to move tool with minimal effort along cable travel. Our spring balancers:

- Increase Productivity
- Extend Tool Life
- Reduces Operator Fatigue
- No Power Requirement
- Increases Safety

CAPACITIES: 0.5 - 1.5kg, 1.5 - 3kg, 3-5kg, 5-7kg, 7-9kg, 9-15kg, 15-22kg, 22-30kg, 30-40kg, 40-50kg, 50-60kg, 60-70kg



RECYCLING CARTS

Recycling waste bins available in sets of 4 for environment friendly waste management for your warehouse.

- Clearly color coded waste bin for separation of waste
- Wheels for easy movement and transport
- Solid pedal for flip-top lid
- 120L, 240L



OUTDOOR WASTEBINS

Commercial outdoor wastebins for bulk waste disposal management.

- Perfect for warehouses, factories, parks, street waste, and any outdoor settings.
- Steady and stable wheels for easy movement and transport.
- Body built of long lasting material.
- 360L, 660L, 1100L





Junko

In today's fast-paced business environment, the need for specialised equipment and material in a warehouse is highly necessary in order to provide quality products and services to the end customers. A business needs to match competition and at the same time provide safety assurances in a warehouse environment. With our goal to offer reliable, durable and aesthetically pleasing products, our sales team is ready to provide detailed information and specifications on the products in our catalogue.

FOR ALL INQUIRIES:
Junko FZE, P. O. Box 51431
Hamriyah Free Zone, Sharjah, UAE

Tel: +971 6 5251422 | Fax: +971 6 5536353 | Mobile: +971 50 3426615 | +971 55 9524280
E-mail: junkofze@gmail.com | joseph@junko-fze.com | info@junko-fze.com
Skype: [joseph.junko](https://www.skype.com/name/joseph.junko) | Web-site: www.junkofze.net | www.junko-fze.com