

www.minottidrymix.com

Minotti





COMPANY PROFILE



Minotti

“Minotti” is a leading producer of premium quality cement and gypsum based dry mix products with more than a decade of experience in the international dry mix industry. We offer premium high quality products, advanced know-how, timely technical assistance and unlimited customer service. Minotti is able to meet most challenging product requirements to provide effective solutions to the construction market and building industry. We achieve customer satisfaction through quality management, high technical expertise and quality services on a wide range of dry mix products. The advanced state-of-the-art Minotti automated plant ensures a continuous control over the production process assuring constant quality of the products offered. Minotti offers a wide range of machines for the mixing and application of the products providing customers savings in time & work force. The automated mixing machines assure continuous quality control in the application process.

Minotti provides the most modern silo system with pneumatic dry mix conveying and automatic application machines for the construction industry. The system offers ready to apply products at the “press of a button”. We offer the product delivery to the site in mobile silos or bags, a range of machines are available for the various application and usage of the products at site. The products are reachable to any distance in time with mobile silos and pneumatic conveying system at the “press of a button”. The system will provide the customers a clear edge in quality and productivity.

Minotti Quality

Minotti quality standards are ISO 9001:2015 certified. Raw materials and finished products are subjected to strict quality control checks by the In-house QC laboratory ensuring confirmation with international product specifications as per BS EN/ASTM standards. Minotti In-house technical lab is equipped with all equipments required for the testing of raw materials and finished dry mix products. Minotti offers the application machines from PFT, Germany. The machine application ensures the homogeneous and accurate mixing of the dry mix products with water, thus eliminating the errors that can occur with the manual mixing.

Minotti Support

In construction industry the technical support plays an important role. Minotti offers experienced and dedicated on time technical team to support our customers. The premium quality of the products and technical services ensure the total customer satisfaction to meet most challenging expectations. Minotti support is distinct by the continuous development producing high quality products and technical services with more than a decade of international dry mix experience.

Minotti Environment policy

Minotti is an Eco-friendly company dedicated towards a clean work environment and LEED products. The company is committed to produce eco-friendly LEED complied products by harvesting regional raw materials and dust free manufacturing/application process. Minotti silo system with the pneumatic dry mix conveying will provide a clean and dust free job site adding more value to health, safety and environment.

Advantages

- Quality, Reliability and Consistency
- Eco-friendly products
- Regional product design & development
- In-house laboratory
- Wide product range
- Prompt service & delivery
- Specialized
- Quick response technical team
- Clean job site
- Material protected from weather, spillage and theft
- Machine application resulting in premium quality and productivity



Product range

- Bonding Key Coats
- Cement Plasters/Renders
- Decorative Colour Renders
- Decorative Texture Finishes
- Gypsum Plasters
- Masonry Mortars
- Tile Adhesives
- Tile Grouts
- Floor Screeds
- Repair Mortars
- Non shrink Grouts
- Insulation Plasters/Mortars
- Special Plasters

Minotti products are designed and tested as per International standards. Minotti can design, develop and manufacture variety of modified Cement & Gypsum based products as per the customer requirements and specifications. For detailed information about our products, please refer to technical data sheets.



Product catagorey	Product Code	Feild Of Application	Packing	Approx coverage [per tonne]
Bonding Key Coats	MINO 100	Bonding coat for rendering on normal fair faced concrete surfaces. Application by tyrolean box/ spray gun @ 2-5mm.	50kg bags	430 m ² @ 2mm thickness
	MINO 120	Bonding coat for rendering on densified concrete surfaces. Application by Tyrolean box/ spray gun @ 2-5mm.	50kg bags	430 m ² @ 2mm thickness
	MINO 140	Bonding coat for rendering on ultra smooth concrete surfaces. Application by tyrolean box/ spray gun @ 2-5mm.	50kg bags	430 m ² @ 2mm thickness
	MINO 150	Bonding coat for rendering on impermeable/non absorbing surfaces (EPS/XPS etc). Application by Tyrolean box/ spray gun @ 5-6mm.	50kg bags	430 m ² @ 2mm thickness
Cement Render/Plaster	MINO 200	Render/plaster for internal/external concrete block walls. Application by spray machine/manual @ 10-20mm.	Silo/50 kg bags	42 m ² @ 15mm thickness
	MINO 201	Lime free Render/plaster for internal/external concrete block walls. Application by spray machine/manual @ 10-20mm.	Silo/50 kg bags	42 m ² @ 15mm thickness
	MINO 210	Render/plaster for internal/external AAC/concrete block walls. Application by spray machine/manual @ 10-20mm.	Silo/50 kg bags	42 m ² @ 15mm thickness
	MINO 211	Lime free Render/plaster for internal/external AAC/concrete block walls. Application by spray machine/manual @ 10-20mm.	Silo/50 kg bags	42 m ² @ 15mm thickness
	MINO 220	Light weight render/plaster for internal/external AAC/concrete block walls. Application by spray machine/manual @	Silo/30 kg bags	50 m ² @ 15mm thickness
	MINO 230	Render/plaster for internal/external concrete block walls where high strength (>10 MPa) is required. Application by spray machine/manual @ 10-20mm.	Silo/50 kg bags	37 m ² @ 15mm thickness
	MINO 240	Render/plaster for high strength (> 15 MPa) requirements. Application by spray machine/manual @ 15-50mm.	Silo/50 kg bags	40 m ² @ 15mm thickness
	MINO 250	Fine thin coat plaster for ceilings and rough cement plaster surfaces. Application by spray machine/manual @ 4-6mm.	Silo/40 kg bags	162 m ² @ 4mm thickness

Product catagorey	Product Code	Feild Of Application	Packing	Approx coverage [per tonne]
	MINO 255	Fine thin coat plaster for direct applica- tion on concrete surfaces. Application by spray machine/manual @ 3-8mm.	Silo/40 kg bags	152 m ² @ 4mm thickness
Decorative Colour Renders	MINO 300	Decorative colour render for external block walls. Application by spray machine/manual @ 15-20mm.	Silo/50 kg bags	42 m ² @ 15mm thickness
	MINO 310	Decorative textured color render for external block walls. Application by spray machine/manual @ 15-20mm.	Silo/50 kg bags	35 m ² @ 15mm thickness
	MINO 320	High strength (> 15 MPa) decorative textured color render for landscaping works. Application by spray machine/manual @	Silo/50 kg bags	38 m ² @ 15mm thickness
Decorative Texture Finishes	MINO 370	Decorative spray applied texture finishes for external/internal walls. Application by spray gun/manual @ 3-4mm.	50 kg bags	180 m ² @ 3.5mm thickness
	MINO 380	Decorative trowel applied texture finishes for external/internal walls. Application by manual @ 3-4mm.	50 kg bags	160 m ² @ 3.5mm thickness
Gypsum Plasters	MINO 400	Standard gypsum plaster for internal AAC/concrete block walls. Application by spray machine/manual @ 10-20mm.	Silo/25 kg bags	58 m ² @ 12mm thickness
	MINO 410	Fine thin coat gypsum plaster for ceilings and rough cement plaster surfaces. Application by spray machine/manual @ 4-6mm.	Silo/25 kg bags	208 m ² @ 4mm thickness
	MINO 412	Fine thin coat gypsum plaster for direct application on concrete surfaces. Application by spray machine/manual @ 3-8mm.	Silo/25 kg bags	208 m ² @ 4mm thickness
Masonry Mortars	MINO 500	Block laying mortar for concrete block works. Mixing by screw machine/manual.	Silo/50 kg bags	37 m ² @ 10mm thickness (40x20x20cm block)
	MINO 510	Block laying mortar for AAC block works. Mixing by screw machine/manual.	Silo/40 kg bags	108 m ² @ 5mm thickness (60x25x20cm block)
Tile Adhesives	MINO 550	Economical grade Tile adhesive for ceramic/procelain tiles on internal /external areas. Mixing by screw machine/manual.	Silo/25 kg bags	Yield 635 L/ton


Product catagorey	Product Code	Feild Of Application	Packing	Approx coverage [per tonne]
Tile Adhesives	MINO 552	High grade Tile adhesive for ceramic/porcelin tiles on internal /external areas. Mixing by screw machine/manual.	Silo/25 kg bags	Yield 685 L/ton
	MINO 554	Flexible grade Tile adhesive for ceramic/porcelain/glass tiles on internal/ external areas. Mixing by screw machine/manual.	Silo/25 kg bags	Yield 685 L/ton
Tile Grouts	MINO 580	Standard grade Tile grout for ceramic/porcelain tiles on internal/ external areas. Mixing by screw machine/manual.	25 kg bags	Yield 690 L/ton
	MINO 582	High grade Tile grout for ceramic/porcelain/glass tiles on internal/ external areas. Mixing by screw machine/manual.	25 kg bags	Yield 690 L/ton
Floor Screeds	MINO 600	Bonded/un bonded/floating leveling screed for floors. Mixing by screw machine/manual. Strength grade 15MPa - 40MPa	Silo/50 kg bags	Yield 530 L/ton
Repair Mortars	MINO 700	Fine repair mortar for concrete surfaces. Mixing by screw machine/manual.	40 kg bags	Yield 620 L/ton
	MINO 710	Thick repair mortar for concrete surfaces. Mixing by screw machine/manual.	50 kg bags	Yield 530 L/ton
	MINO 750	Fine repair mortar for plaster cracks. Mixing by manual.	40 kg bags	Yield 650 L/ton
Non Shrink Grouts	MINO 800	Non Shrink grouting mortar for medium strength (40MPa) anchoring applications. Mixing by screw machine/manual.	Silo/50 kg bags	Yield 510 L/ton
	MINO 810	Non Shrink grouting mortar for high strength (70MPa) anchoring applications. Mixing by screw machine/manual.	Silo/50 kg bags	Yield 510 L/ton
Insulation Mortars	MINO 900	Thermal insulation render for external walls (Thermal conductivity value $\lambda=0.1$ W/m.K) Application by spray machine/manual @	Silo/15 kg bags	48 m ² @ 40mm thickness
	MINO 910	Adhesive/reinforcing layer for EPS/XPS thermal insulation sheets. Mixing by screw machine/manual.	Silo/40 kg bags	200 m ² @ 3mm thickness

MINOTTI SYLO SYSTEM



up to 300m*

*with Relay station

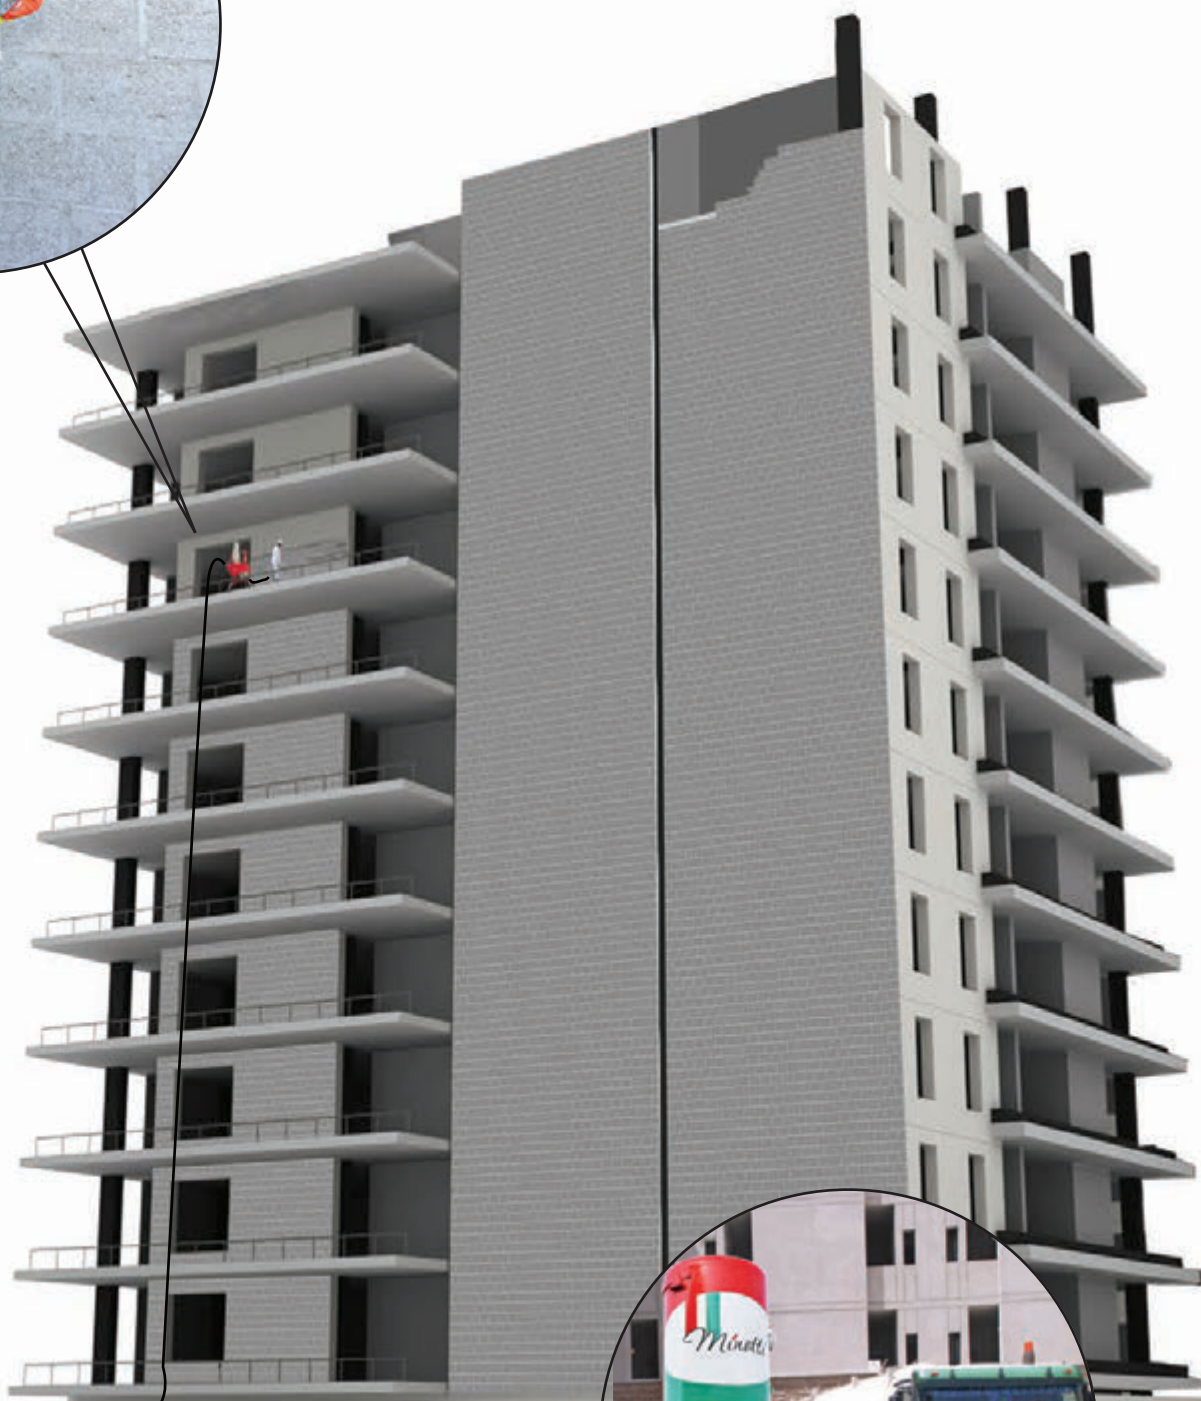

Material filling from Tanker to Silo





MINOTTI DRY MIX FACTORY

P.O.Box: 85818, Ras Al Khaimah, UAE, Tel. :(+971) 7 2281 824, Fax: (+971) 7 2281 827

E-mail: info@minottidrymix.com, Website: www.minottidrymix.com