

flexipack®

فليكسي باك

**SEALING & SHRINK PACKAGING,
CARTON PACKAGING AND
MATERIAL HANDLING EQUIPMENTS**



+971 52 535 0465
info@flexipackuae.com
www.flexipackuae.com



Industrial Area 5,
Al Qusais, Dubai, UAE



Scan QR Code to
save our details
in your contact.

Complete Solution For Your Filling & Packing Industry.

Flexi Pack Packing & Packaging Equipment Trading LLC is an well-known company in supply of filling & packaging machinery and packaging material in the Middle East and GCC under the brand FLEXIPACK in a short period of time. Established in 2020, With the valuable supervision of our experienced team, we are growing day by day in this domain. Owing to his vast industry experience and in-depth domain knowledge, we have been able to achieve such peak of success in short span of time.

Our Objective:

Our objective is to bring the latest technology in filling and packaging Industry to provide quality products to the end consumers. We offers a wide range of filling and packaging machines, designed and customized to meet our customer requirement, which includes primary packaging and secondary packaging machineries.

Our Policy:

Our policy is to manufacture Best Quality products at an affordable price and to provide the proper after sales support. We have a separate development department that takes care of research work to advanced technological reforms with superior quality product development. We know the importance of the R & D room

Key strengths:

- Team of skilled professionals
- Customer focused approach
- Ethical practices
- Strict quality control

Our Team:

With the support of our well qualified and experienced professionals, we have been able to manufacturing and supplying a broad assortment of industrial machines. Experts in their respective domains, our team operate the whole business operations in well-defined manner. Moreover, our team works in close proximity with each other as well as with our respected customers to analyze their precise demands and needs properly. We offer to our team regular training sessions and seminars to enhance and polish their knowledge timely.

TABLE OF CONTENT

DESCRIPTION	Page No.
AUTOMATIC L SEALER AND SHRINK TUNNEL	4
AUTOMATIC SIDE SEALER AND SHRINK TUNNEL	5
SEMI AUTOMATIC L SEALER AND SHRINK TUNNEL	6
AUTOMATIC / SEMI AUTOMATIC SLEEVE SEALER AND SHRINK TUNNEL	7
SHRINK CHAMBER & VACUUM SEALER	8
DOUBLE CHAMBER VACUUM SEALER	9
AUTOMATIC CARTON ERECTOR, CARTON SEALING & STRAPPING MACHINE	10
AUTOMATIC CARTON SEALER AND STRAPPING MACHINE	11
SEMI AUTOMATIC CARTON SEALER WITH HOT MELT GLUE APPLICATOR	12
SEMI AUTOMATIC CARTON SEALER	13
STRAPPING MACHINE	14
BAND SEALER	15
STRETCH PALLET WRAPPING MACHINE	16
PALLET TRUCK	17
STACKER	18
DATE PRINTER	19



TECHNICAL PARAMETERS

Model: FTM 5545TBA / FTM 5545 TBB

Max. sealing size: 550 x 450mm

Air pressure: 6-8 Kg/cm²

Applicable film: POF

Machine dimensions: 1685 x 828 x 1480mm

Model: FTM 6560TBA / FTM 6560TBB

Max. sealing size: 650 x 600mm

Air pressure: 6-8 Kg/cm²

Applicable film: POF

Machine dimensions: 1940 x 1000 x 1480mm

SHRINK TUNNEL**Model: FTM 4525**

Tunnel size (LxWxH): 700x450x250

Power supply: 3Phase 380V 50/60Hz

SHRINK TUNNEL**Model: FTM 5030**

Tunnel Size (LxWxH): 1300x500x300mm

Power supply: 3Phase 380V 50/60Hz

flexipack[®]

www.flexipackuae.com

AUTOMATIC SIDE SEALER AND SHRINK TUNNEL



TECHNICAL PARAMETERS

Model: FTM5545TBC/M

Max packing size L(mm) H150: Unlimited
W+H(mm): 430, Cross sealing L: 450mm
Power: 380V 3Ph 50/60Hz, 1.8Kw
Air Pressure: 6-8kg/cm²

Model: FTM5560TBC/M

Max packing size L(mm) H150: Unlimited
W+H(mm): 550, Cross sealing L: 600mm
Power: 380V 3Ph 50/60Hz, 2Kw
Air Pressure: 6-8kg/cm²

Model: FTM5580TBC/M

Max packing size L(mm) H150: Unlimited
W+H(mm): 750, Cross sealing L: 800mm
Power: 380V 3Ph 50/60Hz, 2.2Kw
Air Pressure: 6-8kg/cm²

SHRINK TUNNEL

Model: FTM 5030

Tunnel Size (LxWxH): 1300x500x300mm
Power supply: 3Phase 380V 50/60Hz

flexipack®

www.flexipackuae.com

SEMI AUTOMATIC L SEALER AND SHRINK TUNNEL



TECHNICAL PARAMETERS

Model: FTM 5545TB

Max. sealing size 550x450

Air pressure: 6-8 kg/cm²

Applicable film: POF

SHRINK TUNNEL

Model: FTM 4525

Tunnel size (LxWxH): 700x450x250

Power supply: 3Phase 380V 50/60Hz

Model: FTM 7555TB

Max. sealing size: 750x550

Air pressure: 6-8 kg/cm²

Applicable film: POF

SHRINK TUNNEL

Model: FTM 5030

Tunnel Size (LxWxH): 1300x500x300mm

Power supply: 3Phase 380V 50/60Hz

flexipack[®]

www.flexipackuae.com

AUTOMATIC / SEMI AUTOMATIC SLEEVE SEALER AND SHRINK TUNNEL



TECHNICAL PARAMETERS

SLEEVE SEALER

Model: FTM6030 / FTM6030A
Max. Packing size W+H: $\leq 700\text{mm}$
Cutter size/tunnel size: 700mm
Machine weight: 465kg
Power: 2kw
Power supply: 3Phase 380V, 50/60Hz,
Max current: 10A
Air pressure: 6kg/cm^3

SHRINK TUNNEL

Model: FTM6040S
Tunnel size: W600×H400mm
Max. Packing size: L1500×W450×H300mm
Power: 22kw
Power supply: 3Phase 380V, 50/60Hz,
Max current: 35A
Machine weight: 600kg
Machine dimension: L2700×W900×H1640mm

flexipack[®]

www.flexipackuae.com

SHRINK CHAMBER & VACUUM SEALER



TECHNICAL PARAMETERS

SHRINK CHAMBER

Model: FTM5540A

Machine dimension(L x W x H)

1380x690x1065mm

Max Packing size (L x W x H) 450x300x200

Max sealing size (L x W x H) 550x400

Packing speed(pcs/h) 500-800pcs/h

Power 4 Kw

Power supply 110V/220V 50/60Hz

Applicable film POF/PVC

VACUUM SEALER

Model: FTM 400

Voltage: 220V

Pump Capacity: 20m³/h

Chamber size: 400 x 330 x 150mm

Working Cycle: 15-40sec/cycle

flexipack[®]

www.flexipackuae.com

DOUBLE CHAMBER VACUUM SEALER



TECHNICAL PARAMETERS

Model: FTM400/2SB

Voltage: 220V

Motor Power: 750W

Sealing Power: 800W

Ultimate Vacuum Pressure: 1Kpa

Chamber size: 440*490*70

Sealing size: 400*12mm

Model: FTM500/2SB

Voltage: 220V

Motor Power: 1500W

Sealing Power: 1200W

Ultimate Vacuum Pressure: 1Kpa

Chamber size: 570*540*70

Sealing size: 500*12mm

Model: FTM600/2SB

Voltage: 220V

Motor Power: 1500W

Sealing Power: 1200W

Ultimate Vacuum Pressure: 1Kpa


Chamber size: 720*515*70

Sealing size: 600*12mm

flexipack[®]

www.flexipackuae.com

AUTOMATIC CARTON ERECTOR, CARTON SEALING & STRAPPING MACHINE

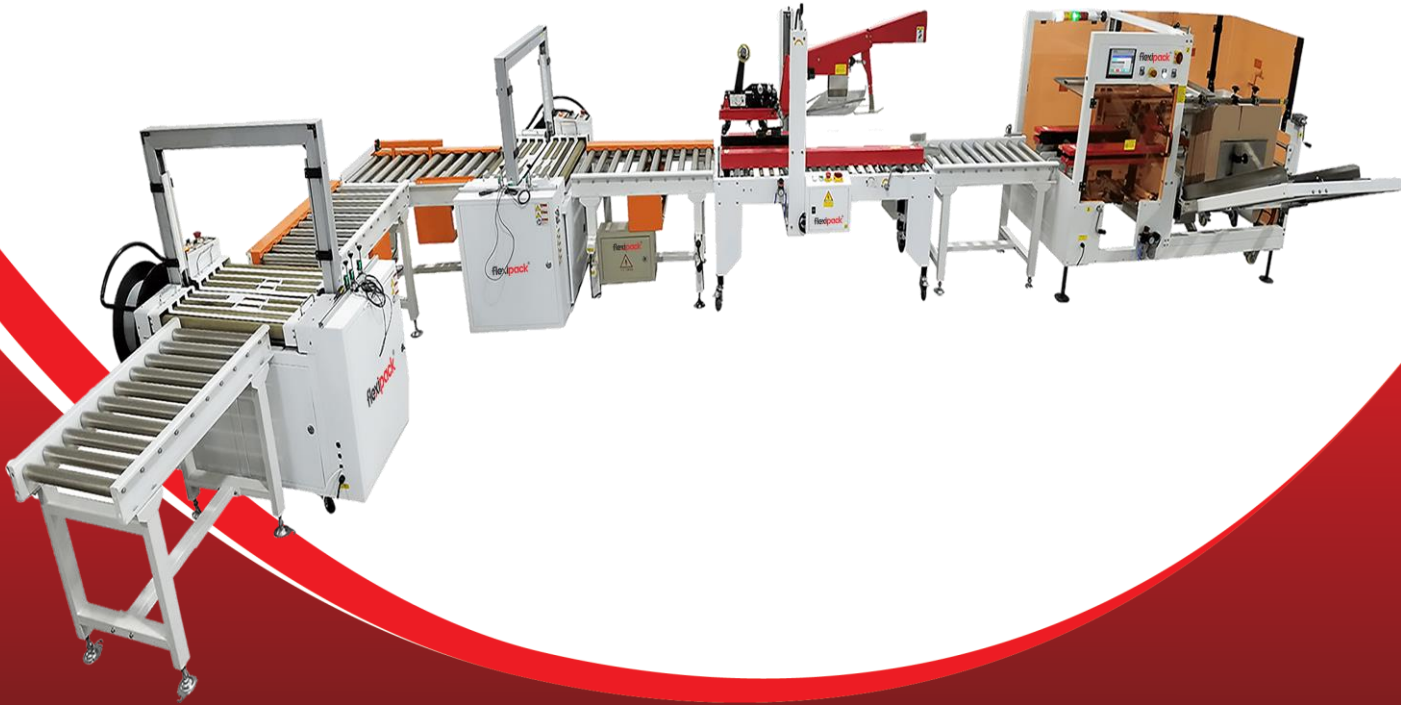

TECHNICAL PARAMETERS

AUTOMATIC CASE ERECTOR MACHINE

Power supply 220/380V 50Hz
Air Pressure 6kgf/cm² 450nl/min
Adhesive Tape width 48/60/75mm

ROLLER CONVEYORS WITH POWER CONTROL

Power 0.5KW
Length 100cm

AUTOMATIC CARTON SEALER & STRAPPING MACHINE

Power Supply 1 Phase 110V/220V/240V
Packing Size Max.: L[∞] x W500 x H500 mm
Min.: L150 x W135 x H110 mm
Tape Width 50 mm (2") or 76 mm (3")
Working Table Height 570~770 mm (Adjustable)
Sealing Capacity 20 Cartons per minute
Net Weight 140 Kg

flexipack[®]

www.flexipackuae.com

AUTOMATIC CARTON SEALER AND STRAPPING MACHINE



TECHNICAL PARAMETERS

Model: FTM-1AE

Power supply: 3p 380V 50Hz 600W

Sealing speed: 20 meters/min

Carton size: L(150-∞)×W(120-480)×H(120-480)mm

Tape size: 48-72mm(Kraft or BOPP tape)

Machine size: L(1370)×W(890)×H(1280)mm

Shipping size: L(1500)×W(1050)×H(1435)mm

G.W/N.W: 270kg/220kg

flexipack[®]

www.flexipackuae.com

SEMI AUTOMATIC CARTON SEALER WITH HOT MELT GLUE APPLICATOR



TECHNICAL PARAMETERS

Type: Flaps Folding

Power: 220V/50HZ

Machine dimension: L1100mm*W930mm*H1320mm

Conveyor speed: 20m/min

Max. packager size: W500mm x H500mm

Min. packager size: W150mm x H70mm

Glue Applicator: Nordson / Robatech

flexipack[®]

www.flexipackuae.com

SEMI AUTOMATIC CARTON SEALER



TECHNICAL PARAMETERS

Type: Top And Side Belts Drive

Model: FTM-FJ-1A

Carton Size:

L Min: 150mm Max: ∞

W Min: 120mm Max: 480mm

H Min: 120mm Max: 480mm

Tape: PVC or PP

Tape width: Max. 50mm

Core: 76mm

Power: 220V 1Phase 0.6Kw

Type: Designed for small boxes

Model: FTM-FJ-1AWS

Carton Size:

L Min: 150mm Max: ∞

W Min: 90mm Max: 320mm

H Min: 60mm Max: 280mm

Tape: PVC or PP

Tape width: Max. 50mm

Core: 76mm

Power: 220V 1Phase 0.4Kw

Type: Top And Bottom Belts Drive

Model: FTM-FJ-1S

Power supply: 1p 220V 50Hz/60Hz

Sealing speed: 20 meters/min

Carton size:

L(130- ∞)

W(190-410)

H(120-480)mm

Tape size: 48-72mm



TECHNICAL PARAMETERS

AUTOMATIC STRAPPING MACHINE

Arch Size: 850W x 600H mm (Standard)
Power Supply: 220V 50/60Hz 1Ph
Strap Cycle Speed: 26 cycles/per Min
Tension Strength: Max. 70kgs
Strap Width: 6~15.5mm
Sealing Method: Heat Sealing
Dimensions: 1400W x 640D x 1475H mm
Table Height: 805mm

MANUAL STRAPPING MACHINE

Strap Cycle Speed: 1.5 sec./ cycle
Tension Strength: 15~60Kgs
Table Height: 735mm
Strap Width: 6~15mm
Sealing Method: Heat Sealing
Power Supply: 110/220V 50/60Hz single phase
Dimensions: 895W x 570D x 735H mm

flexipack®

www.flexipackuae.com

BAND SEALER



TECHNICAL PARAMETERS

AIR SUCTION BAND SEALER

Model: LF1080B
Voltage: 110/220V/50~60Hz
Function: Air Suction, Gas Flushing & Bag Sealing
Sealing speed: 0~12 m/min
Sealing Width: 6~12mm
Temperature range: 0~300
Max. thickness of single layer film: $\leq 0.08\text{mm}$
Max Loading of conveyor: $\leq 3\text{Kg}$
Weight: 84Kg

VERTICAL BAND SEALER

Model: FTMSCS15V
Conveyor load: 15kgs
Sealing Width: 10-12mm
Power: 220V 1Phase

TABLETOP HORIZONTAL BAND SEALER

Model: FTMCS3H
Conveyor load: 3kgs
Sealing Width: 10-12mm
Power: 220V 1Phase

flexipack[®]

www.flexipackuae.com

STRETCH PALLET WRAPPING MACHINE



TECHNICAL PARAMETERS

Model: FTM-FG-2000A

Mechanical Stretch

Power Voltage: 1 P AC 220/110V 50/60 Hz

Speed turntable: 0~10 r/m

Turntable Dia.: Φ 1500mm

Mast height: H2400mm

Film: LLDPE film, width \leq 500mm,out
diameter \leq 280mm

Max height: 2000mm (Mast height minus 400mm)

Model: FTM-FG-2000B

Power Pre-Stretch

Power Voltage: 1 P AC 220/110V 50/60 Hz

Speed turntable: 0~10 r/m

Turntable Dia.: Φ 1500mm

Mast height: H2400mm

Film: LLDPE film, width \leq 500mm,out
diameter \leq 280mm

Max height: 2000mm (Mast height minus 400mm)

flexipack[®]

www.flexipackuae.com

PALLET TRUCK



TECHNICAL PARAMETERS

JUMBO SIZE

Available Capacity: 2500Kgs / 3000Kgs / 5000Kgs

Fork length: 1150mm

Width over forks: 685mm

Total Lift Height: 190mm

Min. fork height: 75mm

Available models: Normal, Stainless Steel, Galvanized

NARROW SIZE

Available Capacity: 2500Kgs / 3000Kgs / 5000Kgs

Fork length: 1150mm

Width over forks: 550mm

Total Lift Height: 190mm

Min. fork height: 75mm

Available models: Normal, Stainless Steel, Galvanized

flexipack®

www.flexipackuae.com

STACKER



TECHNICAL PARAMETERS

SEMI ELECTRIC STACKER

Rated Capacity: 2000kg
Max. Fork Height: 2000mm
Fork Length: 1000mm
Fork Width: 320~850mm
Wheel Base: 1185mm
Front-wheel Distance: 316mm
Lifting Motor: 12/1.6V/kw
Battery: 12V/120Ah
Charger Output: 12V/15A


MANUAL HAND STACKER

Max. Capacity: 2000kg
Max Lifting Height: 1900mm
Lowered Height of Fork: 100mm
Fork Length: 800mm
Load Center Distance: 400mm
Fork Adjustable Width: 250-580mm
Overall Length: 1500mm
Overall Height: 2350mm
Overall Width: 740mm

flexipack®

www.flexipackuae.com

DATE PRINTER

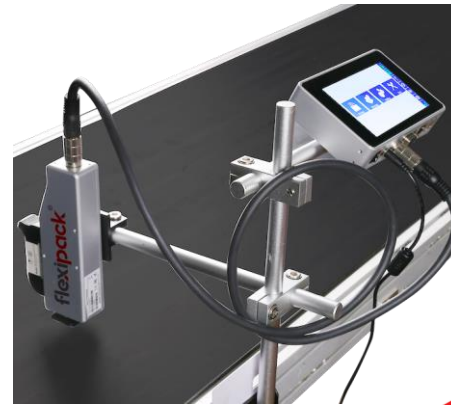

TECHNICAL PARAMETERS

CIJ PRINTER

Model: T560
Screen: 10.1 Inch LVDS HD Screen
Voltage: AC 100V-240V, 50/60HZ
Print Dimension: 5*5/7*5/9*7/12*12/16*16
Ink Type: Solvent Ink
Printing Distance: up to 30 mm
Print Height: 8-15mm
Print Lines: Up to 4 lines (7*5dot),
up to 5 lines (5*5dot)

TIJ PRINTER

Model: TJX1
Shape features: Aluminum
Printing line: 1-6 lines
Printing height: 1.2mm-12.7mm
Printing distance: 1-10mm
Printing speed: 70m/min
Ink type: Quick-dry
environmental ink, water-based
ink and oily ink

HAND PRINTER

Model: TJ7
4.3inches color screen
Print Resolution: 300dpi Maximum
Ink Type: Water-based/42ml,
Solvent/42ml
Battery: 2600mAh@DC16.8V
Adapter: AC input 100-240V;DC
output 16.8V/2A
Material of Printer: ABS+PC



CONNECT US



Google Map



Email



Whatsapp



Youtube



Website