



CAR POWER SWISS QUALITY OIL MOST MODERN



Quality since 1880.

A RELIABLE PARTNER TO SUPPLY ALL YOUR NEEDS



SCAN TO PLACE YOUR ORDER NOW!

93510, Dubai - UAE

+971 (4) 224 7090


info@universalpartnersintl.com

universalpartnersintl.com



Synova 5W-30

Fully synthetic engine oil

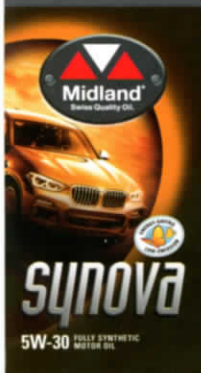

PROPERTY

- Best resistance to oxidation (ageing stability)
- Excellent cold starting characteristics
- Very good high temperature properties
- Minimised oil consumption through low evaporation loss (low Noack)
- Proven fuel saving and reduced emissions
- Low SAPS technology with reduced content of sulphated ash, phosphorus and sulphur
- Increases the service life of exhaust aftertreatment systems such as catalytic converters (SCR) and particulate filters (GPF/DPF) in gasoline and diesel engines

APPLICATION AREA

- Can be used where an ACEA A3/B3-08 or A3/B4-08 is required
- Especially suitable for Mercedes-Benz
- Especially suitable for BMW

SPECIFICATIONS

- ACEA C3
- API SJ*, SL*, SL/CF*, SM*, SN/CF
- BMW Longlife-01*, 04
- Fiat 9.55535-D3, GH2, S2, T2
- Ford M2C917-A
- GM dexos2, LL-A-025, LL-B-025
- MB 229.31*, 229.51
- Porsche A40
- Renault RNO700, RNO710
- VW 500 00*, 501 01*, 502 00, 505 00, 505 01

AVAILABLE PACKAGING

1 L bottle
50 kg drum
4 L canister
175 kg drum

PLEASE SCAN FOR DETAILS



Synova 5W-40

Fully synthetic engine oil



PROPERTY

- Best resistance to oxidation (ageing stability)
- Reduced emissions
- Excellent cold starting characteristics
- Very good high temperature properties
- Low SAPS technology with reduced content of sulphated ash, phosphorus and sulphur
- Increases the service life of exhaust aftertreatment systems such as catalytic converters (SCR) and particulate filters (GPF/DPF) in gasoline and diesel engines

APPLICATION AREA

- Can be used where an ACEA A3/B3-08 or A3/B4-08 is required
- Suitable for diesel engines with pump/jet injection system (SD)
- Suitable for gasoline and diesel engines
- Suitable for passenger cars and light commercial vehicles

SPECIFICATIONS

- ACEA C3
- API SJ*, SL*, SL/CF*, SM*, SN/CF
- BMW Longlife-01*, 04
- Fiat 9.55535-D3, GH2, S2, T2
- Ford M2C917-A
- GM dexos2, LL-A-025, LL-B-025
- MB 229.31*, 229.51
- Porsche A40
- Renault RNO700, RNO710
- VW 500 00*, 501 01*, 502 00, 505 00, 505 01

AVAILABLE PACKAGING

1 L bottle
50 kg drum
4 L canister
175 kg drum

PLEASE SCAN FOR DETAILS



Synqron 5W-30

Fully synthetic engine oil



PROPERTY

- Proven fuel saving and reduced emissions thanks to lowered HTHS viscosity
- Excellent cold starting characteristics
- Good high temperature properties
- Protects against premature ignition at low speed (LSPI Low ∞ Speed Pre-Ignition)

APPLICATION AREA

- Only suitable for petrol engines
- Especially suitable for GM and Opel
- Suitable for catalytic converters
- Suitable for passenger cars and light commercial vehicles

SPECIFICATIONS

- API Resource Conserving, SL*, SM*, SN*, SN Plus*, SP
- Chrysler MS 6395
- Fiat 9.55535-CR1
- Ford M2C929-A, M2C946-A, M2C946-B1
- GM 4718M, 6094M, dexos1*, dexos1 Gen 2
- ILSAC GF-5*, GF-6A



AVAILABLE
PACKAGING

1 L bottle
4 L canister
175 kg drum

PLEASE SCAN
FOR DETAILS



Avanza 10W-40

Synthetic blend engine oil



PROPERTY

- Reduced emissions
- keeps the engine clean and protects against wear and corrosion
- Good cold starting characteristics
- Good high temperature properties

APPLICATION AREA

- Suitable for modern classics
- Suitable for passenger cars and light commercial vehicles

SPECIFICATIONS

- ACEA A2/B2*, A3/B3*, A3/B4
- API SL*, SM*, SN*, SN Plus*, SP
- Fiat 9.55535-D2, G2
- MB 229.1*, 229.3
- PSA B71 2294, B71 2300
- Renault RNO700, RNO710
- VW 500 00*, 501 01*, 502 00, 505 00



AVAILABLE
PACKAGING

1 L bottle
54 kg drum
4 L canister
180 kg drum

PLEASE SCAN
FOR DETAILS



Avanza 5W-30

Fully synthetic engine oil



PROPERTY

- Proven fuel saving and reduced emissions thanks to lowered HTHS viscosity
- Excellent cold starting characteristics
- Good high temperature properties

APPLICATION AREA

- Especially suitable for Ford
- Suitable for passenger cars and light commercial vehicles

SPECIFICATIONS

- ACEA A1/B1*, A5/B5
- API SL*, SM*, SN*, SN Plus*, SP
- Ford M2C913-A*, M2C913-B*, M2C913-C*, M2C913-D
- Jaguar Land Rover STJLR.03.5003
- Renault RN0700



AVAILABLE
PACKAGING

1 L bottle
4 L canister
175 kg drum

PLEASE SCAN
FOR DETAILS



Avanza 5W-40

Fully synthetic engine oil



PROPERTY

- Best resistance to oxidation (ageing stability)
- Reduced emissions
- Keeps the engine clean and protects against wear and corrosion
- Excellent cold starting characteristics
- Good high temperature properties
- Minimised oil consumption through low evaporation loss [low Noack]

APPLICATION AREA

- Suitable for gasoline and diesel engines
- Suitable for passenger cars and light commercial vehicles

SPECIFICATIONS

- ACEA A2/B2*, A3/B3*, A3/B4
- API SL*, SM*, SN*, SN Plus*, SP
- BMW Longlife-01
- Chrysler MS 10896*, 12991
- Fiat 9.55535-H2, M2, N2, Z2
- GM LL-B-025
- MB 226.5*, 229.1*, 229.3*, 229.5
- Porsche A40
- PSA B71 2296
- Renault RN0700, RN0710
- VW 500 00*, 501 01*, 502 00, 505 00



AVAILABLE
PACKAGING

1 L bottle
50 kg drum
4 L canister
175 kg drum

PLEASE SCAN
FOR DETAILS



Crypto3 5W-30

Fully synthetic engine oil



PROPERTY

- Best resistance to oxidation (ageing stability)
- Reduced emissions
- Excellent cold starting characteristics
- Very good high temperature properties
- Low SAPS technology with reduced content of sulphated ash, phosphorus and sulphur
- Increases the service life of exhaust aftertreatment systems such as catalytic converters (SCR) and particulate filters (GPF/DPF) in gasoline and diesel engines

APPLICATION AREA

- Can be used where an ACEA A3/B3-08 or A3/B4-08 is required
- Suitable for diesel engines with pump/jet injection system (SD)
- Especially suitable for VW
- Suitable for a mixed fleet
- Suitable for gasoline and diesel engines
- Suitable for passenger cars and light commercial vehicles



SPECIFICATIONS

- ACEA C3
- API SL*, SM*, SN
- BMW Longlife-01*, 04
- Chrysler MS 6395, 11106
- Fiat 9.55535-G1, S3
- Ford M2C917-A
- GM dexos 2
- MB 229.31*
- MB-Approval 229.51
- Porsche C30
- Renault RNO700
- VW 500 00*, 501 01*, 502 00*, 503 00*, 503 01*, 504 00, 505 00*, 505 01*, 507 00



AVAILABLE
PACKAGING


1 L bottle
50 kg drum
4 L canister
175 kg drum

PLEASE SCAN
FOR DETAILS



Crypto-XX 0W-30

Fully synthetic engine oil

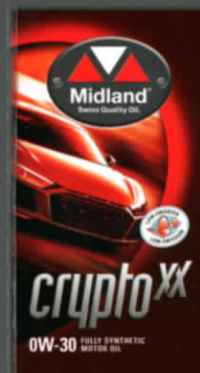

PROPERTY

- Best resistance to oxidation (ageing stability)
- Reduced emissions
- Excellent cold starting characteristics
- Very good high temperature properties
- Low SAPS technology with reduced content of sulphated ash, phosphorus and sulphur
- Increases the service life of exhaust aftertreatment systems such as catalytic converters (SCR) and particulate filters (GPF/DPF) in gasoline and diesel engines

APPLICATION AREA

- Can be used where an ACEA A3/B3-08 or A3/B4-08 is required
- Suitable for diesel engines with pump/jet injection system (SD)
- Especially suitable for VW, Audi, Porsche, Seat, Skoda
- Suitable for a mixed fleet
- Suitable for gasoline and diesel engines
- Suitable for passenger cars and light commercial vehicles



SPECIFICATIONS

- ACEA C3
- BMW Longlife-01*, 04
- Chrysler MS 6395
- Fiat 9.55535-DS1, GS1
- MB 229.31*, 229.51*
- MB-Approval 229.52
- Porsche C30
- VW 500 00*, 501 01*, 502 00*, 503 00*, 503 01*, 504 00, 505 00*, 505 01*, 507 00



AVAILABLE
PACKAGING

1 L bottle
175 kg drum

PLEASE SCAN
FOR DETAILS



Synqron 10W-60

Fully synthetic engine oil

PROPERTY

- Good cold starting characteristics
- Excellent high temperature properties
- Minimised oil consumption through low evaporation loss [low Noack]

APPLICATION AREA

- Guaranteed lubrication reliability, including for motor sport use
- Suitable for BMW M Performance and sports cars from Aston Martin, Bugatti, Ferrari, Maserati and Alfa Romeo
- Suitable for cars

SPECIFICATIONS

- ACEA A2/B2*, A3/B3*, A3/B4
- API SJ*, SL*, SL/CF*, SM*, SN/CF
- Fiat 9.55535-H3



AVAILABLE
PACKAGING

1 L bottle
175 kg drum

PLEASE SCAN
FOR DETAILS



Synqron 0W-20

Fully synthetic engine oil

PROPERTY

- Proven fuel saving and reduced emissions thanks to lowered HTHS viscosity
- Keeps the engine clean and protects against wear and corrosion
- Excellent cold starting characteristics
- Minimised oil consumption through low evaporation loss [low Noack]
- Protects against premature ignition at low speed [LSPI Low — Speed Pre-Ignition]

APPLICATION AREA

- Only suitable for petrol engines
- Especially suitable for GM and Opel
- Only to be used in vehicles in which an engine oil viscosity of 0W-20 is recommended
- Suitable for cars

SPECIFICATIONS

- API Resource Conserving, SL*, SM*, SN*, SN Plus*, SP
- Chrysler MS 6395
- Fiat 9.55535-CR1
- Ford M2C947-A, M2C947-B1
- GM 4718M*, 6094M*, dexos1*, dexos1 Gen 2, LL-A-025*
- ILSAC GF-5*, GF-6A




AVAILABLE
PACKAGING

1 L bottle
50 kg drum
175 kg drum

PLEASE SCAN
FOR DETAILS



Performance 20W-50 Mineral Engine oil

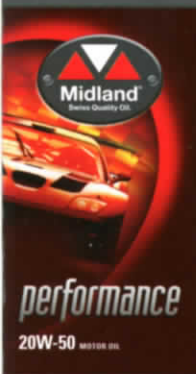

PROPERTY

- Best resistance to oxidation (ageing stability)
- Compatible with all seal materials (old and new)
- keeps the engine clean and protects against wear and corrosion
- Excellent high temperature properties

APPLICATION AREA

- Guaranteed lubrication reliability, including for motor sport use
- Suitable for classic cars
- Suitable for catalytic converters
- Can be used in motor sport
- Suitable for cars



SPECIFICATIONS

- ACEA A2/B2*, A3/B3*, A3/B4
- API SJ*, SL*, SL/CF*, SM*, SN/CF
- MB 229.1
- VW 500 00*, 501 01, 505 00



AVAILABLE
PACKAGING

1 L bottle
180 kg drum

PLEASE SCAN
FOR DETAILS



Synqron 0W-40 Fully synthetic engine oil



PROPERTY

- Best resistance to oxidation (ageing stability)
- Keeps the engine clean and protects against wear and corrosion
- Excellent cold starting characteristics
- Good cold starting characteristics
- Very good high temperature properties

APPLICATION AREA

- Suitable for Porsche and Mercedes-Benz
- Suitable for cars



SPECIFICATIONS

- ACEA A2/B2*, A3/B3*, A3/B4
- API SJ*, SL*, SL/CF*, SM*, SN/CF
- BMW Longlife-01
- Fiat 9.55535-H2, M2, N2, Z2
- Ford M2C937-A
- MB 226.5*, 229.1*, 229.3*
- MB-Approval 229.5
- Porsche A40
- PSA B71 2296
- Renault RN0700, RN0710
- VW 500 00*, 501 01*, 502 00, 505 00



AVAILABLE
PACKAGING

1 L bottle
4 L canister
175 kg drum

PLEASE SCAN
FOR DETAILS

