

Our Own Canvas Coat

Canvas Coat CTC-336 – Our Prestigious Brand Canvas Cloth lagging Adhesive Coating

Description: Canvas Coating 30-36 Is A Tough And Flexible Adhesive And Sealant, Forming A Durable Seal Against Air Leakage. Due To Its Excellent Water, U.V. And Abrasion - Resistance It Can Be Used In Outdoors As Well As Indoors In Thermal Insulation System On Metal Duct.

Application Method: Brush, Short Aired Roller Or Air Less Spray.

Shelf Life: 18 Months In Unopened Container.

Packing: 25 Kg Airtight Plastic Pail With Polyethylene Liner.

Storage: Store Away From Direct Sunlight Preferable 30°C.

Hazardous Information: Canvas Coating 30-36 Is A Non-flammable And Non-hazardous Coating, It Does Not Contain Asbestos, Lead, Mercury Or Mercury Compound.

Disposal: Since Empty Container Retain Product Residue, Please Follow Local Municipality Rules And Regulation.

Cautions: Canvas Coating 30-36 May Cause Dizziness, Headaches, Nausea And Unconsciousness In Case Using In Confined Space. Eye Contact May Cause Irritation, Harmful If Swallowed.

First Aids: In Case Of Eye Contact Flush With Plenty Of Water And Seek Immediate Medical Advice.



Marketed By:
Cherian Trading Co. L.L.C

CONTACT


P : 04-22 38112

M: 0501646995, 0507341360


E : ctcac@rocketmail.com

P.O. Box: 42498, Al Taif building Shop No: 03

Near union metro station Deira, Dubai. UAE.



**CHERIAN TRADING
CO. L.L.C.**




CHERIAN TRADING CO. L.L.C.

WHOLESALE & RETAILER OF AIR CONDITIONING & REFRIGERATION SPARE PARTS

AEROFOAM
(UL Certified)
XLPE
GOFLEX



XLPE - SHEET

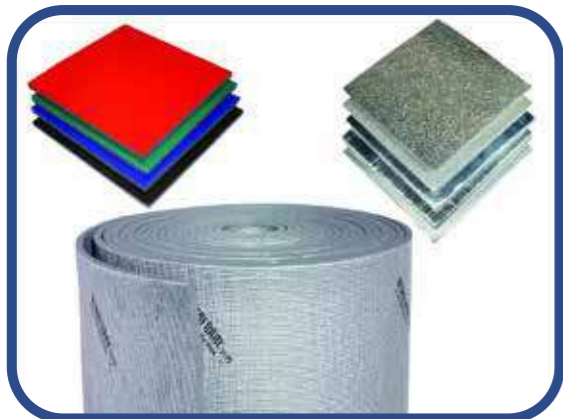

XLPE Roll



Acoustic Absorber



XLPE-Pipe



XLPE Glue




Aero Sound

AEROFOAM
(UL Certified)
NBR
GOFLEX



NBR Sheet

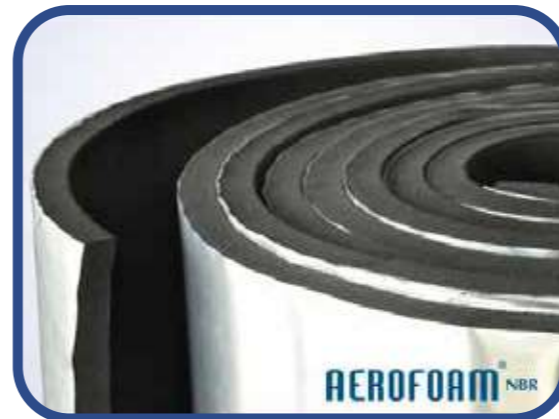

N Clad



Rubber Glue



Rubber Pipe



Rubber Roll



Rubber Roll With Glue

COPPER



Fittings



Coil



Insulated Pipe



Pipe



Y Branch Fittings



Insulated Coil



TAPES



Aluglass Aluminium foil FSK Fibre Joint Double Sided



Alupet XLPE Single Sided Foam NBR Gasket Cork



Warning Masking Clear Teflon Duct Grey PVC Black



Brazing Powder Brazing Rod Canvas Coat Foster 32-17 Sealant Canvas Cloth Stuck-up Pin



AIR CONDITONER



Window AC



Indoor & Outdoor Unit



Duct



Floor Standing

REFRIGERANT GASES



R22 | R32 | R410A | 404A | 407A | 137A | 134A | R141B | R507

COMPRESSOR



OILS & CLEANER



TOOLS



Hand Tools



Power Tools

TOOLS

SILICONE & SPRAY



INSULATIONS




X100- waterproof and fast cure adhesive for joining rigid, PVC, CPC and UPVC Pipes and fittings

Sawa bond - Can be used for all PVC Pipes and Fittings

Hydrosal Canada Is High Strength PVC Solvent Cement For All Classes And Schedules Of Pipes And Fittings.

SPARE PARTS

SPARE PARTS

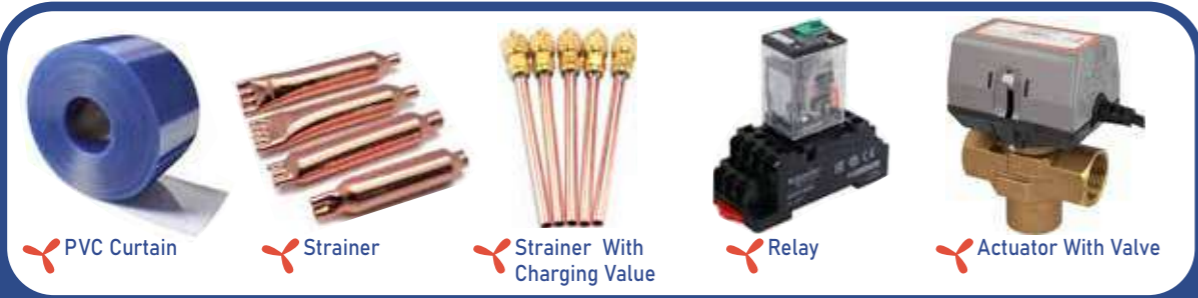

FITTINGS

FITTINGS

