
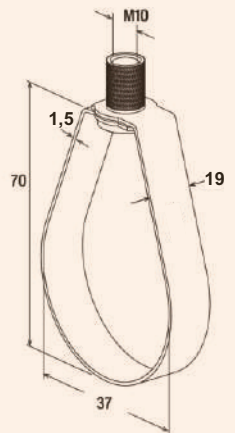
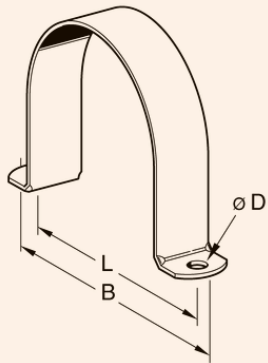
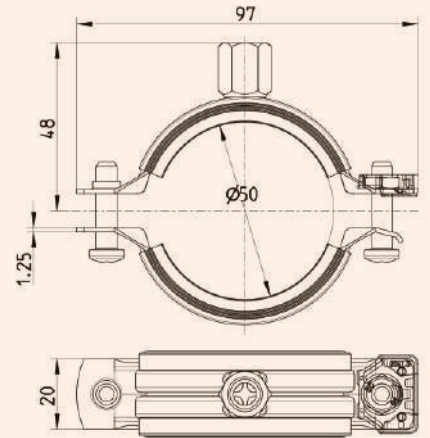
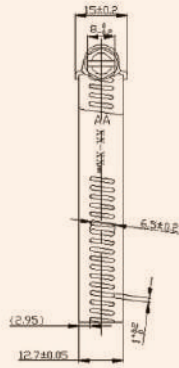


محمد بن اسماعيل لتجارة مواد البناء (ش.ذ.م.م)

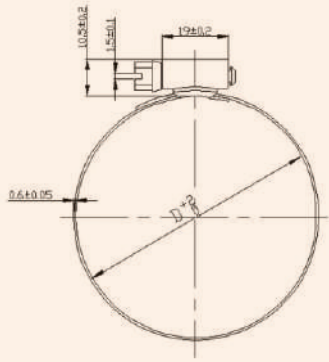

— **MBE** —

Mohammed Bin Esmail

Building Materials Trading LLC

Address:

Al Nakheel, Deira, Dubai-UAE

Phone:

04 294 7460

Mail:

mbebmt@gmail.com

**MBE**

Company Profile

We take this opportunity to introduce ourselves as one of the leading importers, stockist and supply of building materials, plumbing materials, electrical materials, sanitary wares, fasteners and rigging hardware. It has been established in the year 2006 in Dubai, U.A.E. The company is a leading, manufacturer in the field of pipe fitting clamps under the brand name MBECO.

The Company offers a diverse range of products. These include pipe fitting nail clamps, nut clamps with and without rubber, sprinkler clamps all under the brand name MBECO. We can also provide a detail submittal for consultant approval. We have been catering to building contractors, electromechanical, joineries, interior decorators, fabricators and foundation companies. We also maintain a warehouse to ensure availability of the materials on a regular basis. We have skilled and experienced work force to implement any critical job.

The Company is continuously rising on the growth chart and setting very high quality standards. Our strict emphasis on quality is combined with the latest technology to offer our customers a competitive edge.

Since its inception, the company has established a reputation for itself as a supplier of quality products. We focus on quality and aim to achieve total customer satisfaction, both in the products, and in the service that follows.




Our highest priority is on customizing our products. We are committed to provide quality products at affordable prices and consistency.

Grooved G I NUT Clamp




MBE

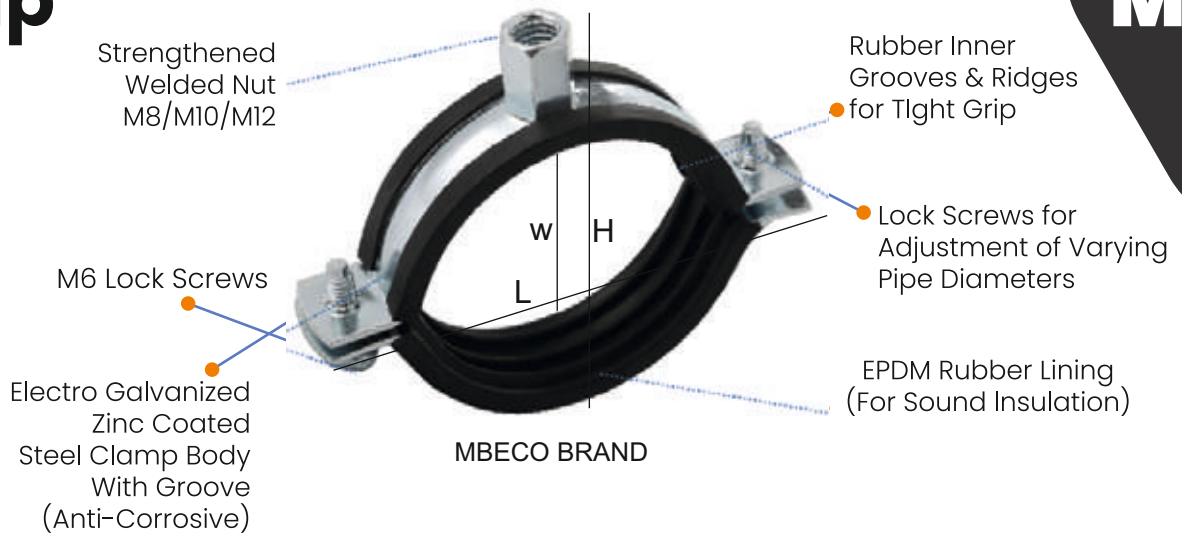

Rubber - Technical Data

Material	: EPDM
Stretch	: $\geq 250\%$
Hardness	: 45 shore A
Temp. Resistance	: -40°C to $+110^{\circ}\text{C}$
Ozone Resistance	: Grade 0

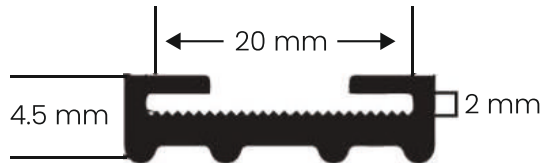

Features:

1. Can be used for all horizontal, vertical & roof hanging installations.
2. EPDM sound insulation lining having value on average 18 DB (A).
3. High breaking resistance.
4. Welded nut M8 / M10 / M12 .
5. Zinc coated electro galvanizing for corrosion resistance.
6. M6 side screws with Plastic Washers.
7. Breaking load in traction: 650 Kg.
8. Safe working load: 2000 N

G I Rubber Hanging Clamp					
ID INCHES	ID MM	Dimensions	W1	H	Width x Thickness
		L			
3/8"	15-18	60	26	36	20 x 1.5
1/2"	20-25	65	29	43	20 x 1.5
3/4"	26-30	70	32	50	20 x 1.5
1"	32-36	85	36	56	20 x 1.5
1 1/4"	38-43	92	39	63	20 x 1.5
1 1/2"	47-51	98	42	72	20 x 1.5
	53-56	98	77	45	20 x 1.5
2"	60-64	104	83	48	20 x 1.5
	63-66	114	93	53	20 x 1.5
2 1/4"	74-80	125	56	96	20 x 2.0
	81-86	139	60	108	20 x 2.0
3"	87-92	146	63	111	20 x 2.0
3 1/4"	99-105	156	68	121	20 x 2.0
	107-112	166	73	131	20 x 2.0
4"	113-118	171	76	136	20 x 2.0
	125-130	181	81	146	20 x 2.0
	131-137	184	85	154	20 x 2.0
5"	138-142	196	88	161	20 x 2.0
	148-153	206	93	171	20 x 2.0
	159-166	216	98	181	20 x 2.0
6"	168-172	224	102	189	25 x 2.0
	200-212	256	118	221	20 x 2.0
8"	215-220	276	128	241	20 x 2.0
	248-252	306	143	271	25 x 2.0
10"	269-274	306	143	271	30 x 2.5
12"	313-318	371	176	336	30 x 2.5


Stainless Steel Rubber Hanging Clamp (ss304, ss316)



MBE

Features:

- * Used for mounting of pipes on the wall (vertical, horizontal) ceilings and floors
- * Epdm lining for, Noise reduction level up to 15 db according to din 4109 and vibration reduction.
- * Partial compensation of thermal expansion.
- * Easy and safe assembly through philips combi side screws.
- * Side screws are protected against loss during assembly with the help of plastic washers.

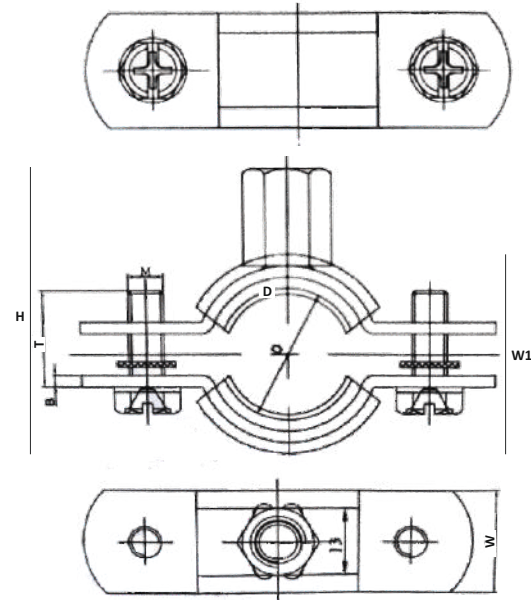

Note:

1. MBECOSSC W5 series (all the parts are SS316)
2. Welded Nut M8 & M10

SS (A4) Hanging Clamp							
Pipe Size MM	ID MM	ID INCHES	Dimensions			Width x Thickness	
			L		W1	H	W x T
18	3/8"	15-19	60		26	36	20 x 1.5
22	1/2"	20-25	65		29	43	20 x 1.5
28	3/4"	26-30	70		32	50	20 x 1.5
35	1"	32-36	85		36	56	20 x 1.5
40	1 1/4"	38-43	92		39	63	20 x 1.5
48	1 1/2"	47-51	98		42	72	20 x 1.5
54		53-56	98		77	45	20 x 1.5
60	2"	60-64	104		83	48	20 x 1.5
70		68-72	114		93	53	20 x 1.5
75	2 1/2"	75-80	125		56	96	20 x 2.0
83		71-86	139		60	108	20 x 2.0
90	3"	87-92	146		63	111	20 x 2.0
100	3 1/2"	99-105	156		68	121	20 x 2.0
110		107-112	166		73	131	20 x 2.0
115	4"	113-118	171		76	136	20 x 2.0
125		125-130	181		81	146	20 x 2.0
133		132-137	184		85	154	20 x 2.0
140	5"	138-142	196		88	161	20 x 2.0
150		148-152	206		93	171	20 x 2.0
160	6"	159-166	216		98	181	20 x 2.0
200		200-212	256		118	221	20 x 2.0
220	8"	215-220	276		128	241	20 x 2.0
250		248-252	306		143	271	25 x 2.0




MBECO BRAND

Features:

1. 1/2" to 2": 2.0 x 20 mm Steel Strip
2. 3" to 8": 2.5 x 20 mm Steel Strip
3. Electro Galvanised
4. M6 x 16 mm side screws
5. Applications: Fixing of steel & PVC pipes
6. Design features enable simple installation due to clear opening available

Ref.	Pipe Size	ID INCHES	Width x Thickness	Square Nail
				Thickness x Length (mm)
HNC1	1/2"	20-25	20 x 1.5	6 mm x 65 mm
HNC2	3/4"	26-30	20 x 1.5	6 mm x 65 mm
HNC3	1"	32-36	20 x 1.5	6 mm x 65 mm
HNC4	1 1/4"	38-43	20 x 1.5	6 mm x 65 mm
HNC5	1 1/2"	47-51	20 x 1.5	6 mm x 65 mm
HNC6	2"	53-56	20 x 1.5	6 mm x 65 mm
HNC7	2 1/2"	60-64	20 x 2.0	8 mm x 65 mm
HNC8	83 mm	71-86	20 x 2.0	8 mm x 83 mm
HNC9	3"	87-92	20 x 2.0	8 mm x 83 mm
HNC10	110 mm	107-112	20 x 2.0	8 mm x 83 mm
HNC11	4"	113-118	20 x 2.0	8 mm x 83 mm
HNC12	6"	159-166	20 x 2.0	8 mm x 83 mm
HNC13	8"	195-210	20 x 2.0	8 mm x 83 mm

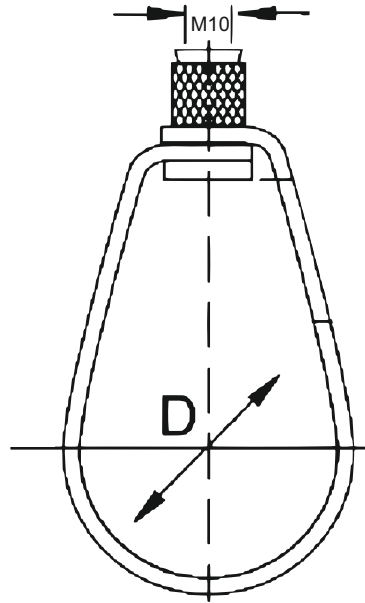

Features:

1. One piece hanger guarantees high permissible load.
2. Locking device allows easy pre-mounting & maintenance.
3. Time saving with easy installation.
4. More strength, so greater safety.
5. Electro galvanised zinc coating.
6. Adjustable in height.
7. Used for holding all kinds of pipes especially fire fighting suspension pipes.
8. For breaking load in traction & safe working load In traction – See table.

Ref.	Sizes (D)	G.I.Sprinkler Clamp		Safe Load (kg)
		Particulars	Break Load (kg)	
SKC 1	1"	20 x 1.5	1350	450
SKC 2	1 1/4"	20 x 1.5	1350	450
SKC 3	1 1/2"	20 x 1.5	1350	450
SKC 4	2"	20 x 1.5	2200	700
SKC 5	2 1/2"	20 x 2.0	2200	700
SKC 6	3"	20 x 2.0	2200	700
SKC 7	4"	20 x 2.0	2200	700
SKC 8	6"	20 x 2.0	2600	850
SKC 9	8"	20 x 2.0	2600	850


BRITISH TYPE HOSE CLAMP



MBE

Features:

1. Worm drive hose clamp adapted to re-movably support the nozzle of hose a worm wheel carried by the shaft a housing function it is intended to perform.
2. Constant torque worm drive clamp this active, pressure compensating clamp help solve leakage and rupture problems

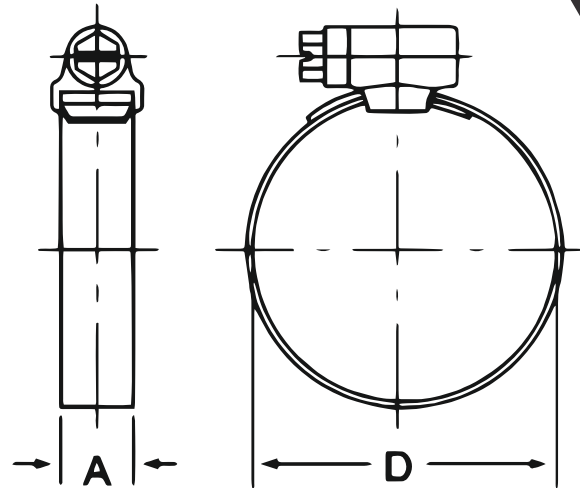

Note:

1. MBECOWDC : GALVANIZED WZP

Worm Drive Clamp

Band width x Thickness	Size (mm)	Pcs◇Bag	Pcs◇Ctn	Torque (N.M)
A x T	D			
9.7 x 0.8	9.5-1.2	100	1000	5
9.7 x 0.8	11 - 16	100	800	5
9.7 x 0.9	13-20	100	700	5
9.7 x 0.9	16-22	100	600	5
9.7 x 0.9	18-25	100	600	5
11.7 x 1	22-30	50	600	5
11.7 x 1	25-35	50	400	5
11.7 x 1	30-40	50	400	5
11.7 x 1	32-45	50	300	5
11.7 x 1	35-55	25	300	5
11.7 x 1	45-60	25	250	5
11.7 x 1	55-70	25	250	5
11.7 x 1	60-80	10	250	5
11.7 x 1	70-90	10	250	5
11.7 x 1	85-100	10	250	5
11.7 x 1	90-120	10	250	5
11.7 x 1	110-140	10	250	5
11.7 x 1	120-150	10	200	5
11.7 x 1	140-170	10	200	5
11.7 x 1	185-215	10	150	5
11.7x1	235-265	10	150	5


G I CLEVIS HANGER



MBE

Features:

1. Material: carbon steel
2. Clevis hanger are two piece hangers designed to lend support to all sizes of pipes with very high permissible loads.
3. The locking device allows pre mounting and easy repair and maintenance work.
4. Pendulum action, 15 degree swing in either direction allows pipe to easily feed through and facilitates support at varying heights.

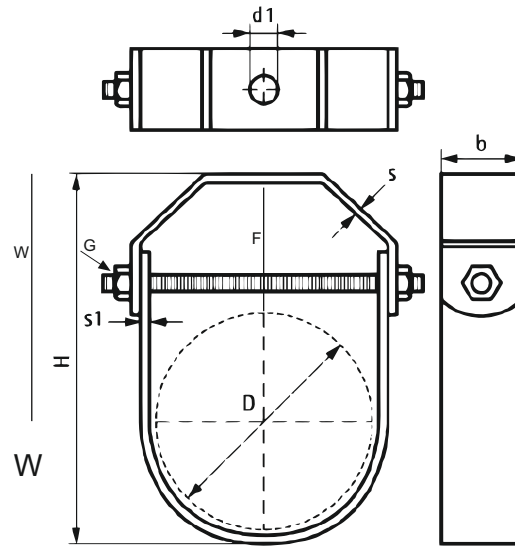

Clevis Hanger


Inch	MM	Size			D	E	F	G	Max Load KN	Weight KG
		S x B	D1	H						
1 1/2"	153	25	M10	64	48.5	28.5	11	M6	2.7	15.4
3/4"	203	25	M10	72	54	34	13	M6	2.7	17.7
1"	253	25	M10	82	60.5	40.5	16	M6	2.7	20
1 1/4"	323	25	M10	96.5	70.5	50.5	22	M6	2.7	20.4
1 1/2"	403	25	M10	108.5	79.5	59.5	27	M8	2.7	25
2"	505	30	M10	130	98	78	41	M8	2.7	27.7
2 1/4"	655	30	M12	162	117	93	51	M10	5	63.6
3"	805	30	M12	171.5	120.5	96.5	44	M10	5	69
3 1/4"	905	30	M12	184.5	127	103	44	M10	5	77.2
4"	1005	30	M16	204.5	140.5	108.5	49	M10	6.3	96.7
5"	1255	30	M16	232	155.5	123.5	44	M12	6.3	110.8
6"	1505	40	M20	264.5	175.5	135.5	48	M12	8.6	162.1
8"	2005	45	M20	331	216.5	176.5	54	M16	8.8	225.6
10"	25010	45	M20	400	256	216	57	M20	16	399.5
12"	30010	50	M20	470	300	260	76	M20	16.9	518.5
14"	35012	50	M24	517	331.5	283.5	75	M20	18.6	673.7
16"	40012	60	M24	560.5	349.5	301.5	66.5	M24	21.3	955.2
18"	45012	60	M24	654.5	418.5	370.5	98	M30	21.3	1108.7
20"	50020	75	M30	720.5	455	395	102	M30	21.3	1936.3
24"	60020	75	M30	828.5	512	452	108	M30	21.3	2203.3
30"	75025	75	M30	1004.5	612	552	127	M30	26.6	3161.7
36"	90025	75	M30	1170.5	701	641	140	M30	42.2	3503.1

G I U Bolt Clamp



Product Technical Description:

1. Made with Mild steel (Cold Rolled & Hot Rolled steel) or Stainless steel (SS 304/SS 316)
2. Electro galvanized as per ASTM B 633 Standards.
3. Hot dipped galvanized can be provided on request.
4. Supplied with two or four nuts.
5. Special U Bolts with longer tangents and threads can be furnished on request.

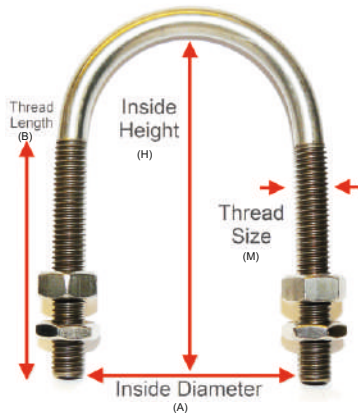

	G.I. U Bolt				
Size Inch	Pipe Size	A (mm)	H (mm)	B (mm)	M (mm)
1 1/2"	21.3	21	50	30	M6
3 1/4"	26.9	27	60	30	M6
1"	33.7	34	70	30	M8
1 1/4"	42.4	43	80	40	M8
1 1/2"	48.3	48	90	50	M8
2"	60.3	6	100	50	M10
2 1/2"	76.1	76	120	50	M10
3"	88.9	89	140	60	M12
3 1/2"	101.6	106	150	65	M12
4"	114.3	115	160	65	M12
5"	139.7	140	200	65	M12
6"	165.1	168	220	90	M16
8"	219	219	270	90	M16
10"	273	273	324	100	M16
12"	324	324	380	100	M16
14"	355.6	356	413	100	M16
16"	406.4	406	470	120	M20
18"	457.2	457	520	120	M20
20"	508	508	582	120	M24
24"	610	610	710	120	M24


G I U Bolt With EPDM



Product Technical Description:

1. Made with Mild steel (Cold Rolled & Hot Rolled steel) or Stainless steel (SS 304/SS 316)
2. Electro galvanized as per ASTM B 633 Standards.
3. Hot dipped galvanized can be provided on request.
4. Supplied with two or four nuts.
5. Special U Bolts with longer tangents and threads can be furnished on request.
6. EPDM Lining for suppression of sound and vibrations
7. EPDM Lining rubber for sound reduction and heat resistance

Pipe size Inches	Pipe Size MM (D)	Width x Thickness	A	B	Length of Strip
1 1/2"	22	32 x 1.7	76	51	79
3/4"	28	33 x 1.7	82	57	94
1"	35	34 x 1.7	89	64	112
1 1/4"	42	32 x 2.0	96	71	144
1 1/2"	48	32 x 2.0	102	77	168
2"	60	32 x 2.0	114	89	187
2 1/2"	75	32 x 2.0	145	113	226
3"	90	32 x 2.5	160	128	270
4"	115	20 x 2.5	185	153	329
5"	140	20 x 2.5	225	164	392
6"	167	20 x 2.5	237	178	461

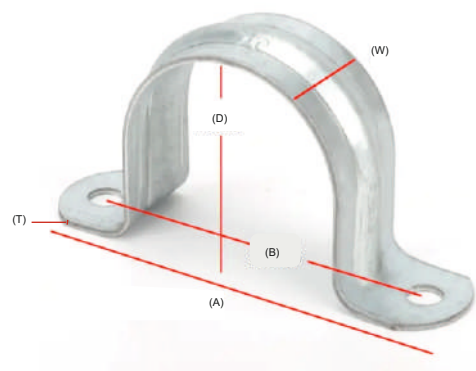

GI SADDLE CLAMP

Product Technical Description:

1. Made with Mild steel (Cold Rolled & Hot Rolled steel) or Stainless steel (SS 304/SS 316)
2. Electro galvanized as per ASTM B 633 Standards.
3. Use to mount plain or insulated pipes.
4. Can be used with Rubber Support Inserts.

GI SADDLE CLAMP WITH RUBBER

Product Technical Description:

1. Made with Mild steel (Cold Rolled & Hot Rolled steel) or Stainless steel (SS 304/SS 316)
2. Electro galvanized as per ASTM B 633 Standards.
3. Used to mount plain or insulated pipes.
4. Can be used with Rubber Support Inserts.
5. EPDM Lining for suppression of sound and vibrations
6. EPDM Lining rubber for sound reduction
Heat Resistance



G I STRUT CHANNEL CLAMP



MBE

Features:

1. Designed to support and secure tubes, conduit pipe to struts in the construction of stationary and mobile equipment
2. Eliminate metal on metal contact between fluid connectors and clamps
3. Help reduce noise, shock vibration caused by fluid surges in tubes and pipes



Note:

1. MBECOSCG: W1 series(all the parts are carbon steel)

Struct Channel Clamps		
Pipe Size MM	Width x Thickness	Pcs Ctn
1 1/2"	32 x 1.7	200
3 1/4"	32 x 1.7	200
1"	32 x 1.7	200
1 1/4"	32 x 2.0	200
1 1/2"	32 x 2.0	200
2"	32 x 2.0	100
2 1/2"	32 x 2.0	100
3"	32 x 2.5	100
4"	32 x 2.5	50
5"	32 x 2.5	50
6"	32 x 2.5	50

GI Nut Clamp with Rubber



K- FIX Brand

Features:

1. Can be used for all horizontal, vertical & roof hanging installations.
2. EPDM sound insulation lining having value on average 18 DB (A).
3. High breaking resistance.
4. Welded nut M8 / M10 / M12 .
5. Zinc coated electro galvanizing for corrosion resistance.
6. M6 side screws with plastic washers.
7. Breaking load in traction: 650 Kg.
8. Safe working load: 2000 N

ID INCHES	ID MM	Dimensions				Width x Thickness
		L		W1	H	
3 1/8"	15-18	60		26	36	20 x 1.2
1 1/2"	20-25	65		29	43	20 x 1.2
3 1/4"	26-30	70		32	50	20 x 1.2
1"	32-36	85		36	56	20 x 1.2
1 1/4"	38-43	92		39	63	20 x 1.2
1 1/2"	47-51	98		42	72	20 x 1.2
	53-56	98		77	45	20 x 1.2
2"	60-64	104		83	48	20 x 1.2
	63-66	114		93	53	20 x 1.2
2 1/2"	74-80	125		56	96	20 x 1.5
	81-86	139		60	108	20 x 1.5
3"	87-92	146		63	111	20 x 1.5
3 1/2"	99-105	156		68	121	20 x 1.5
	107-112	166		73	131	20 x 1.5
4"	113-118	171		76	136	20 x 1.5
	125-130	181		81	146	20 x 1.5
	131-137	184		85	154	20 x 1.5
5"	138-142	196		88	161	20 x 1.5
	148-153	206		93	171	20 x 1.5
	159-166	216		98	181	20 x 1.5
6"	168-172	224		102	189	25 x 1.5
	200-212	256		118	221	20 x 1.5
8"	215-220	276	128	128	241	20 x 2.0

P type Cable Clamp



MBE



Features:

1. P type cable Clamp, holds cables, hoses and pipes in place. It is easily installed by gripping and fastening the clamp to the surface by screw or bolts.
2. P type cable Clamp contribute to reducing cable strain and potential damage over time through their design and function.
3. When properly installed and tightened, they firmly hold cables and wires in place, preventing them from moving or vibrating within their designated zones.
4. P type clamps help prevent cable sag, which can lead to tension and strain on the cables below.

P Type Rubber Clamp		
Product Code	Size (mm)	Bandwidth * Thickness
SS4	4 MM	12*05 20*0.8
SS5	5 MM	12*05 20*0.8
SS6	6 MM	12*05 20*0.8
SS8	8 MM	12*05 20*0.8
SS10	10 MM	12*05 20*0.8
SS12	12 MM	12*05 20*0.8
SS14	14 MM	12*05 20*0.8
SS16	16 MM	12*05 20*0.8
SS18	18 MM	12*05 20*0.8
SS20	20 MM	12*05 20*0.8
SS22	22 MM	12*05 20*0.8
SS24	24 MM	12*05 20*0.8
SS26	26 MM	12*05 20*0.8
SS28	28 MM	12*05 20*0.8
SS30	30 MM	12*05 20*0.8
SS32	32 MM	12*05 20*0.8
SS34	34 MM	12*05 20*0.8
SS36	36 MM	12*05 20*0.8
SS38	38 MM	12*05 20*0.8
SS40	40 MM	12*05 20*0.8
SS42	42 MM	12*05 20*0.8
SS44	44 MM	12*05 20*0.8
SS46	46 MM	12*05 20*0.8
SS48	48 MM	12*05 20*0.8
SS50	50 MM	12*05 20*0.8

OUR PRODUCTS



BEAM CLAMP



DUCT CLAMP



QUICK RELEASE
CLAMP



DOUBLE BOLT
CLAMP



DROP IN
ANCHOR



THROUGH BOLT



SHIELD



G I FIX BOLT



TIE ROD



SHUTTERING
CLAMP



RAPID CLAMP



OPEN / CLOSE HOOK



G I NUT



G I FLAT



G I HEX BOLT



G I THREADED
ROD

OUR PRODUCTS



BRASS EXT.
NIPPLE



BRASS HEX
NIPPLE



BRASS RED
BUSH



BRASS SOCKET



BRASS TANK
CONNECTOR



BRASS TEE



BRASS ELBOW



BRASS END
PLUG & CAP



BRASS GATE
VALVE



BRASS FLOAT
VALVE



BRASS FOOT
VALVE



BRASS
STRAINERS



BRASS UNION



BRASS HEX
BOLT & NUT



BRASS FLAT
WASHER



BRASS WING
NUT

OUR PRODUCTS



CP EXT. NIPPLE
SOCKET



CP TEE



CP ELBOW



CP HEX NIPPLE




CP RED BUSH



CP RED NIPPLE



SHOWER GRATING

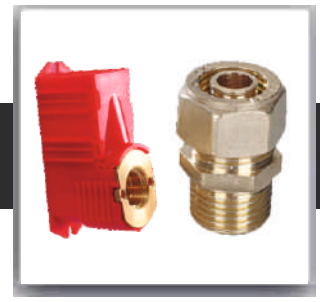

BRASS PEX ELBOW



SS GRATINGS



TEFLON TAPE
1/2" x 10mtr 0.25 den.



TEFLON TAPE
1/2" x 12mtr 0.35 den.



SS BASKET WASTE



GASKET SHELLAC



PIPE JOINT COMPOUND



PVC LUBRICANT



PVC GLUE

OUR PRODUCTS



MBE



**GI SLOTTED
CHANNEL**



GI SPRING NUT



RISER CLAMP




GI BINDING WIRE



EYE BOLT



**SCAFFOLDING
CLAMP**

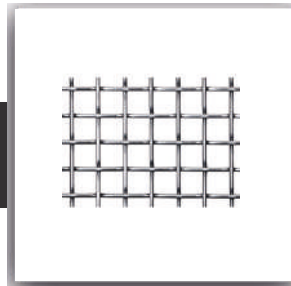

GI MESH



GI KIM NIPPLE



NYLON ROPE



WASTE CLOTH



TARPOULIN SHEET



POLYTHENE SHEET



TEFLON TAPE
1/2" x 10mtr 0.20 den.







TEFLON TAPE
1/2" x 15mtr 0.35 den.



TEFLON TAPE
3/4" x 15mtr 0.35 den.



WD 40

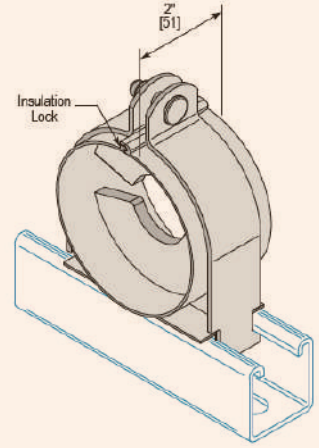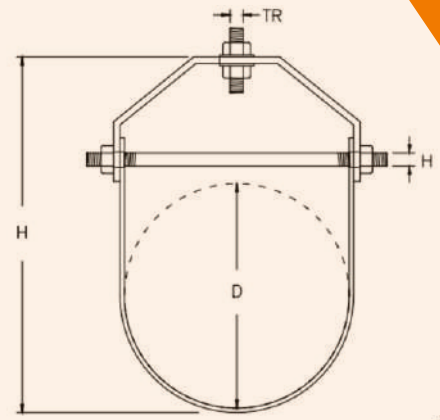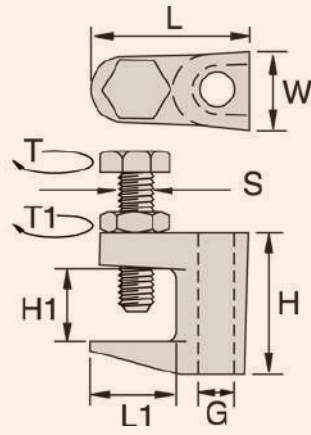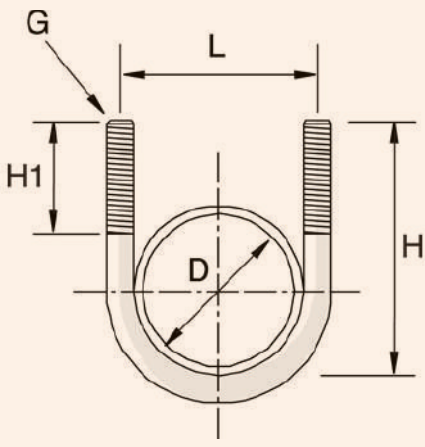

MBE

Mohammed Bin Esmail

Building Materials Trading LLC

محمد بن اسماعيل لتجارة مواد البناء (ش.ذ.م.م)

Complete range of
Pipe Support System
Anywhere, Everywhere!

Address:

Al Nakheel, Deira, Dubai-UAE0

Phone:

04 294 7460

Mail:

mbebmt@gmail.com