



Newtech

LED Trading L.L.C

YOUR STAGE OUR PASSION

www.newtechled.ae



We are the top-tier provider of LED Display products and solutions, catering to various industries across India, including Marriage events, Corporate event & Education, Retail, DOOH & Digital Signage, Leisure & Hospitality, Sports and Entertainment. Their LED displays are built with the latest technology and offer superior image quality and product durability, providing businesses with the power to elevate their brand and reach new heights.


NVS is committed to delivering outstanding customer service, with their experienced experts providing support from the design stage to maintenance and training. They also offer technical online support and professional training in product maintenance, keeping their customers up-to-date with the latest technology and marketing trends.

Furthermore, NVS places a strong emphasis on after-sales service, providing reliable warranty and service policies that customers can trust. With NVS's LED Display products and solutions, businesses can confidently enhance their visual communication and engage their audiences like never before.

URMIII SERIES




INTEGRATED POWER BOX

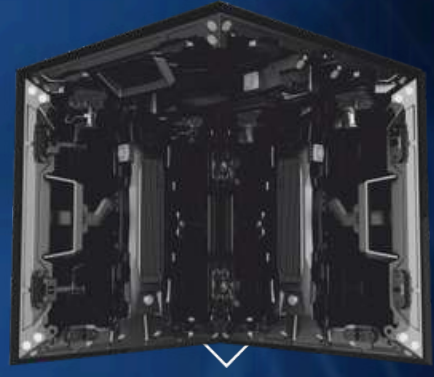

90° CUBE SCREEN

XS SERIES

+/- 45° CURVE

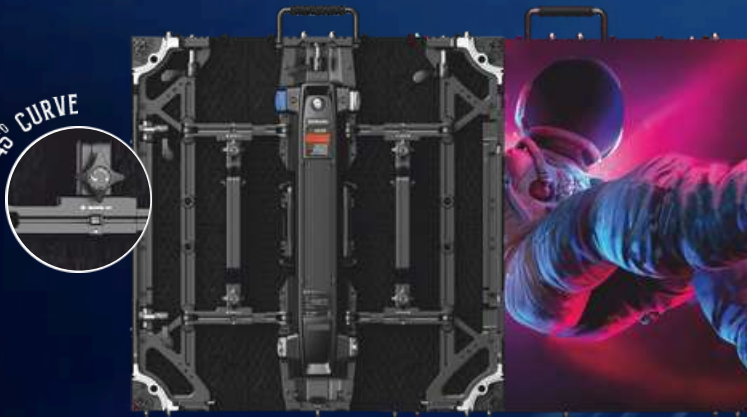

CIRCLE WITH 8 CABINETS ONLY



CONVEX



CONCAVE

URM III SERIES



High Brightness



Corner Protection



Cube Formation



High Protection

| Model | URM III 1.9 | URM III 2.6 | URM III 02 | URM III 03 | URM III 02 | URM III 03 |
|----------------------|-------------------------|------------------------|-----------------|-----------------|-----------------|-----------------|
| Environment | Indoor | | | | Outdoor | |
| Pixel Pitch (mm) | 1.9 | 2.6 | 2.9 | 3.9 | 2.9 | 3.9 |
| LED Type | 3 in 1 SMD1212 | 3 in 1 SMD1515 | 3 in 1 SMD2121 | | 3 in 1 SMD1415 | 3 in 1 SMD1921 |
| Brightness (nits) | 800 | 800-1000 | | | 4500 | |
| Pixels Per Panel | 256*256 | 192*192 | 168*168/168*336 | 128*128/128*256 | 168*168/168*336 | 128*128/128*256 |
| Pixel Density | 262,144 | 147,456 | 112,896 | 65,536 | 112,896 | 65,536 |
| Panel Weight (kg/pc) | 7.3 | 7.3 | 7.3/12.5 | | 7.5/13.2 | |
| Module Size (W*H) | 250*250 | | | | | |
| Cabinet Size (W*H*D) | 500*500*71 | 500*500*71/500*1000*71 | | | | |
| Material | Die Cast Aluminum | | | | | |
| IP Rating | IP30 | IP30 | IP30 | IP30 | IP65 | IP65 |
| Curve function | -10 degree ~ +10 degree | | | | | |

XS SERIES



Creative Splicing



Light & Slim Design



Quick Installation



Circle Formation

| Model | XS 1.9 | XS 2.6 | XS 2.9 | URM III 3-S |
|----------------------|---|----------|----------|---|
| Environment | Indoor | | | Outdoor |
| Pixel Pitch (mm) | 1.9 | 2.6 | 2.9 | 3.9 |
| Brightness (nits) | 800 | 800-1000 | 800-1200 | 4500 |
| Pixels Per Panel | 256*256 | 192*192 | 176*168 | 128*128 |
| Pixel Density | 262,144 | 147,456 | 112,896 | 65,536 |
| Panel Weight (kg/pc) | 7.7 | | | 7 |
| Module Size (W*H) | 500*125 | | | N/A |
| Cabinet Size (W*H*D) | 500*500*80 | | | 500*500*78 |
| Curve function | (Convex)-45° degree ~ +45° degree (Concave) | | | (Convex)-90 degree ~ +90 degree (Concave) |
| Contrast Ratio | 4000 :1 | | | 3000:1 |
| Maintenance | Rear | | | |
| Material | Die Cast Aluminum | | | |

OUTDOOR INSTALLATION (CASES)



L SHAPE INSTALLATION



RESTAURANT



BRAND DISPLAY



GOVT. PROJECT



STADIUM



UNIVERSITIES & INSTITUTIONS



SHOWROOM



RAILWAY PROJECT



SCHOOL & COLLEGE

INDOOR INSTALLATION (CASES)



AUDITORIUM



CONFERENCE ROOM



WORSHIP PLACE



CURVE INSTALLATION



HOSPITAL



CLUB



CEILING INSTALLATION




RESTAURANT



CINEMA HALL



LMINI COB

CHIP ON BOARD

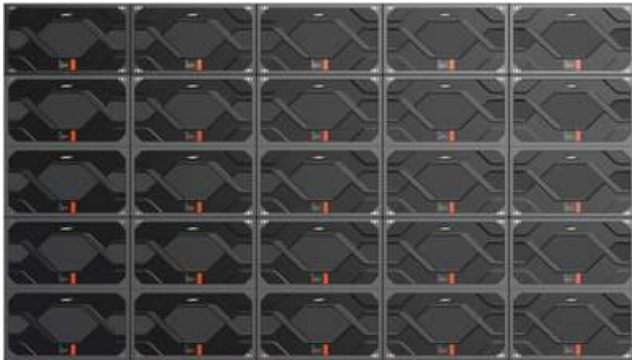

◆ ENERGY SAVING DESIGN

◆ COMFORTABLE VIEWING EXPERIENCE

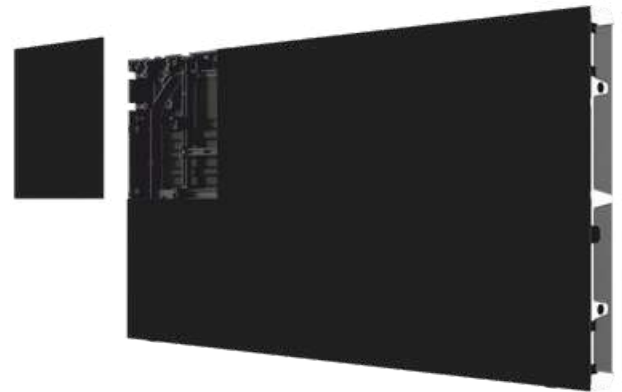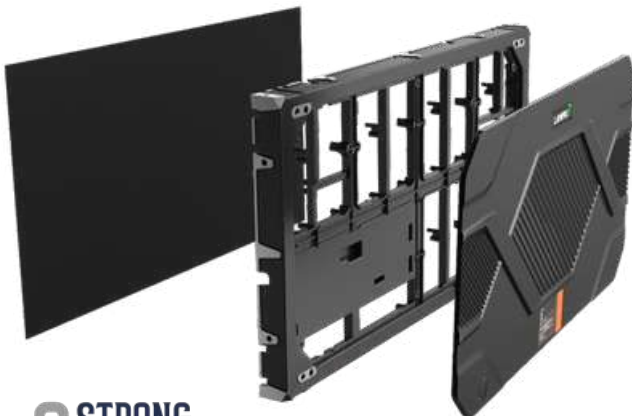

◆ 9 STRONG PROTECTION

◆ ULTRA LIGHT & THIN DESIGN ◆ IP65 (MODULE) WATER PROOF DESIGN

| Model | LMINI 0.7 | LMINI 0.9 | LMINI 1.25 | LMINI 1.5 |
|----------------------|---------------------|-----------|------------|-----------|
| Pixel Pitch (mm) | 0.7 | 0.9 | 1.25 | 1.5 |
| LED Type | Fully flip chip COB | | | |
| Brightness (nits) | 600-800 | | | |
| Pixels Per Panel | 768*432 | 640*360 | 480*270 | 384*216 |
| Pixel Density | 1,638,400 | 1,137,778 | 640,000 | 409,600 |
| Panel Weight (Kg/pc) | 4.3±0.3kg | | | |
| Module Size (W*H) | 150x168.75 | | | |
| Cabinet Size (W*H*D) | 600x337.5x29.8 | | | |
| Material | Die Cast Aluminum | | | |
| Environment | Indoor | | | |
| IP Rating | Front IP65(Module) | | | |
| Refresh Rate (HZ) | 3840-7680 | | | |
| Maintenance | Full Front | | | |

ALL IN ONE CONTROLLER



LIGHT SENSOR



REAL 4K






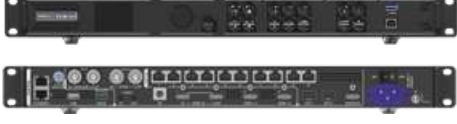
MULTI LAYERS



ALL IN ONE




SEAMLESS SWITCHING

| Model | Pixel Loading Capacity | Inputs | Outputs | Key Features |
|--|--|--|---|---|
|  <p>◆ Vx1</p> | 1.3 million Max W: 1920 Max H: 1080 | 1x HDMI, 1x DVI, 1x VGA, 1x CVBS, 1x USB | ◆ 2 x Ethernet Outputs | ✓ Scaling, ✓ Seamless Switching, ✓ Direct USB Playback |
|  <p>◆ Vx400</p> | 2.6 million Max W: 10240 Max H: 8192 | 2x HDMI 1.3 , 1x HDMI 2.0, 1x 3G SDI , 1x USB 3.0 | ◆ 4 x Ethernet Outputs, ◆ 2x fiber Outputs, ◆ Audio in-out, ◆ 1xHDMI 1.3 Monitor output | ✓ 6 X Windows ✓ Low latency ✓ Light Sensor ✓ Seamless Switching ✓ 3D Supported ✓ Unico Web Page Control |
|  <p>◆ Vx600</p> | 3.9 million Max W: 10240 Max H: 8192 | 2x HDMI 1.3 , 1x HDMI 2.0, 1x 3G SDI , 1x USB 3.0 | ◆ 6 x Ethernet Outputs, ◆ 2x fiber Outputs, ◆ Audio in-out, ◆ 1xHDMI 1.3 Monitor output | ✓ 6 X Windows ✓ Low latency ✓ Light Sensor ✓ Seamless Switching ✓ 3D Supported ✓ Unico Web Page Control ✓ Genlock |
|  <p>◆ Vx1000</p> | 6.5 million Max W: 10240 Max H: 8192 | 2x HDMI 1.3 , 1x HDMI 2.0, 1x 3G SDI , 1x USB 3.0 | ◆ 10 x Ethernet Outputs, ◆ 2x fiber Outputs, ◆ Audio in-out, ◆ 1xHDMI 1.3 Monitor output | ✓ 6 X Windows ✓ Low latency ✓ Light Sensor ✓ Seamless Switching ✓ 3D Supported ✓ Unico Web Page Control ✓ Genlock |

H SERIES

VIDEO SPLICING PROCESSOR

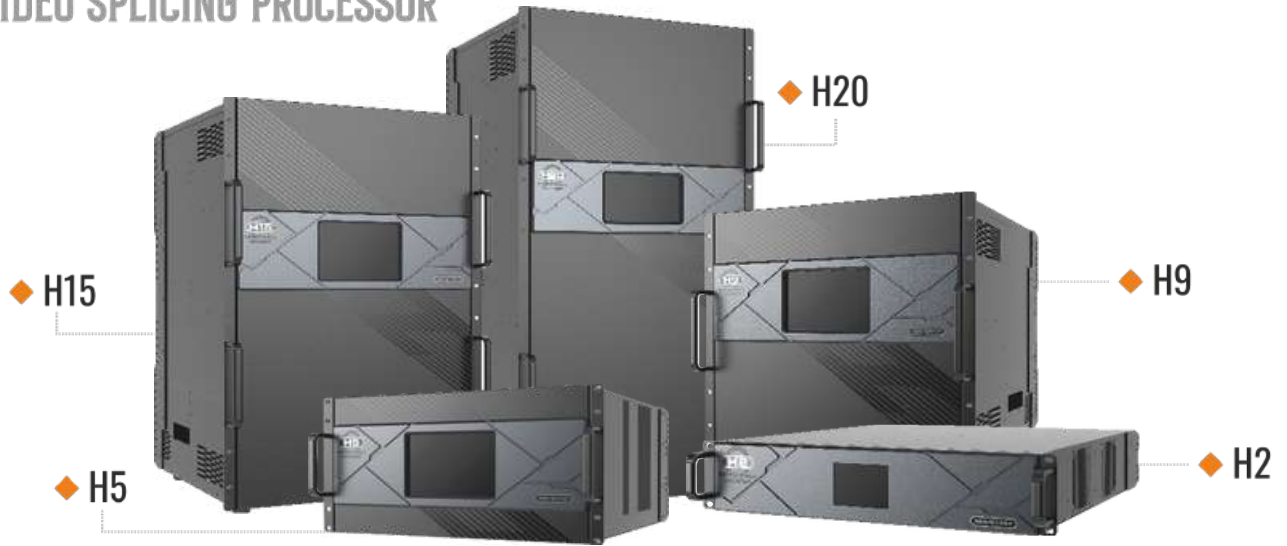

| Model | H2 | H5 | H9 | H15 | H20 |
|-------------------|----|----|--------------------------|----------------------------|-----|
| Rack Unit | 2U | 5U | 9U | 15U | 20U |
| Max. Input Cards | 4 | 10 | 15 | 30 | 40 |
| Max. Output Cards | 2 | 3 | 5 (H9), 10 (Enhanced) | 10 (H15), 16 (Enhanced) | 20 |

| Optional Input Cards | Connectors and Qty (Input) |
|-------------------------------------|--|
| H_4xDVI input card | 4x DVI |
| H_4xHDMI input card | 2x HDMI 1.3 + 2x HDMI 1.4 |
| H_2xHDMI2.0+2xDPI.2 input card | 2x HDMI 2.0 + 2x DPI.2 |
| H_1xHDMI2.0+1xDPI.2 input card | 1x HDMI 2.0 + 1x DPI.2 |
| H_1xHDMI2.0 input card | 1x HDMI 2.0 |
| H_1xDPI.2 input card | 1x DP 1.2 |
| H_2xHDMI2.0 input card | 2x HDMI 2.0 |
| H_2xRJ45 IP input card | 2x RJ45 Ethernet ports |
| H_4x3G SDI input card | 4x 3G SDI |
| H_1x12G SDI input card | 1x 12G SDI IN, 1x 12G SDI LOOP |
| H_2xCVBS+2xVGA input card | 2x CVBS + 2x VGA |
| H_2xDPI.1 input card | 2x DPI.1 |
| H_4xVGA input card | 4x VGA |
| H_2xAudio input+2xAudio output card | 2x Audio inputs + 2x Audio outputs |
| H_4xHDBaseT input card | 4x RJ45 Ethernet ports |
| H_STD I/O card | 2x COM, 1x ETHERNET, 3x I/O, 3x RELAY OUT, 3x IR OUT |

| Optional Output Cards | Connectors and Qty (Output) |
|---------------------------------|--|
| H_4xDVI output card | 4x DVI |
| H_4xHDMI output card | 4x HDMI 1.4 |
| H_2xHDMI2.0 output card | 2x HDMI 2.0 |
| H_16xRJ45+2xfiber sending card | 16x RJ45 Ethernet ports + 2x OPT ports |
| H_4xfiber sending card | 4x OPT ports |
| H_20xRJ45 sending card | 20x RJ45 Ethernet ports |
| H_4x3G-SDI output card | 4x 3G-SDI |
| H_4xHDBaseT output card | 4x RJ45 Ethernet ports |
| H_2xRJ45+1xHDMI1.3 preview card | 2x RJ45 Ethernet ports + 1x HDMI 1.3 |



TAURUS SERIES



◆ TB-1



◆ TB-2



◆ TB-40



◆ TB-60



◆ T16 PRO

| Model | S SERIES Model T16 Pro | TB1-4G | TB2-4G | TB40 | TB60 |
|--------------------------------------|--|--|--|---------------------------------------|---------------------------------------|
| Pixel Loading Capacity | 650,000 as Sending card 260,000 as Control card Max W: 2048 Max H: 2048 | 650000 Max W: 1920 Max H: 1080 | 650000 Max W: 1920 Max H: 1080 | 1300000 Max W: 4096 Max H: 4096 | 2300000 Max W: 4096 Max H: 4096 |
| Dual Wifi (Wifi AP & Wifi Station) | Switchable AP&STA Mode | | | | |
| Control | Phone/Cloud/Pc | | | | |
| Sensor Connectivity/ Audio Output | Available | | | | |
| Storage | 32 GB | | | | |
| 4G Module (Optional) for Sim Card | Available | | | | |
| HDMI IN & LOOP | N/A | N/A | HDMI In Only | Available | Available |
| USB Playback | Available | | | | |



Newtech

LED Trading L.L.C

www.newtechled.ae

Head Office:

M5/A, DSIDC, Badli Industrial Area, Phase-1, Delhi-110042
Contact Details: +91-9810103197, +91-9810103697

U.A.E International Branch Office:

Warehouse No. 10, Plot No. 597779, Dubai Investment Park 2,
Dubai, Uae Mob: +971 0529217755

Website : www.newtechled.ae | E-mail : director@nvsledwall.com , jatin.prakash@newtechled.ae