

الحراري العزل

Thermal


Building Products



Wood Products
Insulation Gypsum Board
Polystyrene Acrylic Sheet
Polyolefin Rubber Sheet
Geotextile Fibre Glass
White Wood Accessories
Polycarbonate Sheet
Calcium Silicate Board
Fibre Cement Board
Bitumen
Acoustic Panels Plywood
PUF Insulation Hardware

Build your home with Thermal

www.thermal.ae

Products		Page
1. Quickfix Insulation Fixing System		1
2. Marine Plywood/Commercial Plywood/MDF		2
3. Acrylic Sheet		3
4. Polycarbonate Sheet		4,5
5. Fujairah Rockwool		6,7,8
6. Unicem Fiber Cement Board		9
7. Everest Fiber Cement Board		10
8. Kimmco Isover For Construction Industry		11
9. Acoustic Panel		12
10. Rubber Sheet		13
11. Knauf Fibre Insulation		14

Products

Page

12. Aerolam Bubble Insulation



15

13. Gypsum Board



16

14. Knauf Gypsum Board



17

15. XLPE Insulation



18

16. Geotextile




19

17. Expanded Polystyrene




20

18. XPS - Extruded Polystyrene



21

19. Closed Cell Elastomeric/Rubber Insulation



22

20. Thermo PUF/PIR Phenolic Foam & Polyisocyanurate



23


21. Calcium Silicate Boards



24

Thermal QuickFix Insulation Fixing System

For more info
055 6134708

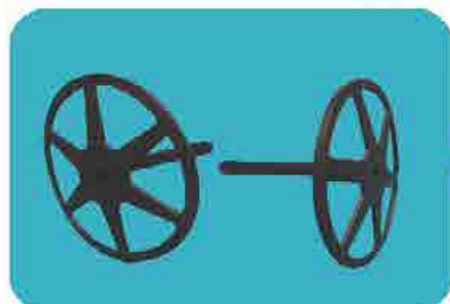

Quick Fix Black(QFB)



Quick Fix White/Metal Anchors

Quick Fix Black(QFB) Insulation Anchors

Length mm		Applications
Min.	Max.	I) Cladding II) Gypsum Partition III) Wall Partition IV) Wooden Partition V) Metal Cladding
95	135	



Quick Fix Metal(QFM)



Quick Fix Washers

Quick Fix White(QFW) Insulation Anchors

Length mm		Applications
Min.	Max.	I) Cladding II) Gypsum Partition III) Wall Partition IV) Wooden Partition V) Metal Cladding
80	130	

Quick Fix Metal(QFM) Insulation Anchors


Length mm		Applications
Min.	Max.	I) Cladding II) Gypsum Partition III) Wall Partition IV) Wooden Partition V) Metal Cladding
65	114	

Thermal QuickFix Insulation Fixing System

System Suitable for below configurations



Rockwool



Fiberglass



Thermokole
Polystyrene



Extruded
Polystyrene



ThermoPUF

Thermal

**Marine Plywood/MDF
Commercial Plywood**

For more info
050 2873366



MDF Board



Commercial Plywood



Marine Plywood



Birch Plywood



White Wood (Murabba)



Laminated Plywood

Thermal[®] Acrylic Sheet

For more info
050 8502300

ThermalAcrylicSheet

provides an excellent clarity & transparency with high impact resistance with lower weight than other conventional materials, kindly contact our technical support team for more information on colour & sizes

Various Colors to Choose from

Clear Acrylic Sheet	Frosted Matt Acrylic
Clear Mat Acrylic	Black Acrylic Sheet
Opal (white light pass) Acrylic	Black Matt Acrylic
Opaque(without light pass)Acrylic	Day Night Acrylic Sheet
Frosted Acrylic Sheet	Color Acrylic Sheet

Sizes

Call Our Sales Support for further info

Thickness

2mm to 50 mm



Thermal[®] Polycarbonate Sheet

**For more info
050 8502300**

ThermalMultiwall

Thermal Multiwall Polycarbonate is layered polycarbonate sheeting that's even more powerful than the base material in terms of unbreakability, versatility and insulation. It exhibits this superiority while maintaining remarkable lightness, which makes it an ideal glazing material for environments where protection is necessary against sunlight and other environmental concerns. Thermal Multiwall polycarbonate can be used in greenhouses, skylights, solariums, atriums and more. Multiwall Polycarbonate is just about the best material you can use.




**Thickness : 4mm to 25mm
Colours : Contact Sales for further info**

ThermalTextured

Thermal Textures Polycarbonate is strong and Asthetically Sound Polycarbonate sheeting is widely used of any display or advertisement, an ideal material that serve as the centerpiece of your creation.

Thermal Tinted Polycarbonate sheets allowing you to boost the security of your facility while also maintaining true to its aesthetic. As an advantage these tinted sheets can reflect up to 70% of solar energy, which can reduce incoming UV radiation

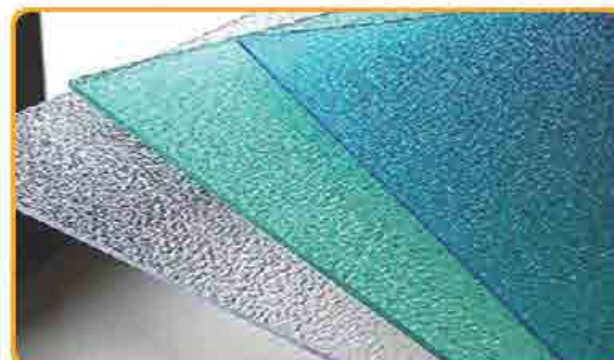

**Thickness: 1 mm to 4 mm
Colour : Contact Sales for further info**

ThermalSolid

Thermal Solid Polycarbonate has in recent years become an immensely popular choice for skylights, sign faces, covered walkways and other instances where transparency is desired. Polycarbonate possesses impact resistance 250 times greater than that of glass while also exhibiting exceptional temperature resistance and tensile strength. Thermal Solid Polycarbonate sheeting is warrantied against yellowing, hazing, breakage and any other defect that might lower its light transmitting capabilities. Simply put, you won't find a better material out there for consistent clarity and durability in even the harshest of environments.



**Thickness : 2mm to 10mm
Colours : Contact Sales for further info**

Thermal[®] Polycarbonate Sheet

For more info
050 8502300




Thickness:

4mm to 25mm

Colours:

Contact Sales for further info

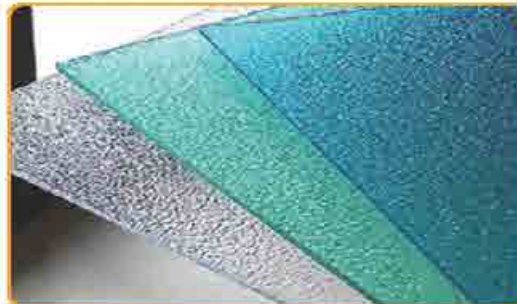

Thickness:

1mm to 4 mm

Colours:

Contact Sales for further info



Thickness:

2mm to 10mm

Colours:

Contact Sales for further info

Features of Product:

Light Transmission

Fine light Transmission(88%) no yellowing, atomization and poor light transmission will occur on boards exposed under sunshine.

UV-Protection

with an ultraviolet coextruded film on the sunshine. it can prevent the resin fatigue or yellowing caused by the ultraviolet and transfer it into the visible light. It has the fine stabilizing effect for the plant photosynthesis (It is extremely applicable for protecting the valuable works of art items on display).

Weatherability

no deformation within the temperature of -40°C ~ $+120^{\circ}\text{C}$

Fire Retardancy

fire retardant grade B1 audited by the national GB8624-97test, without fire drop no poisonous gas.

Impact Resistance

the impact strength of PC sheet is 250-300 time of the ordinary glass.

Sound Insulation

with good sound insulation effect, it is the best materials recognized worldwide for sound insulation of expressways.



Fujairah Rockwool Factory Blankets

Applications:

FRF Mattress is generally applied wherever uneven or irregular surface area needs to be insulated for thermal and acoustic insulation of various applications such as ducts and vessel cladding

Also recommended for use in the Thermal insulation of large vessels, boilers, small machinery, equipment, flange, valves and plants operating at high temperatures. The Blanket is exceptionally suited for wrapping large curved surfaces or for cutting to fit over irregular shapes.

Standard Available Products

STANDARD SIZE [MTR]	STANDARD THICKNESS [MM]	STANDARD DENSITY [KG/M ³]
1.2 x 5.0	30,60	30,40,60,70
1.2 X 1.2	30,50,70,100	40,60,80,100,128

Facing

CODE	FACING
B00X	Blanket without facing
B20X	Blanket with Aluminum Foil Facing on One Side
B22X	Blanket with Aluminum Foil Facing on Both Side
BRXX	Blanket with Black Aluminum foil on One Side

Fujairah Rockwool Factory Wired Blanket

Applications:

FRF Mattress is generally applied wherever uneven or irregular surface area needs to be insulated for thermal and acoustic insulation of various applications such as ducts and cladding or other equipment in heating, ventilating and air conditioning applications. Also recommended for use in the Thermal insulation of large vessels, boilers, small machinery, equipment, flange, valves and plants operating at high temperatures. The Blanket is exceptionally suited for wrapping large curved surfaces or for cutting to fit over irregular shapes.

Standard Available Products

STANDARD SIZE [MTR]	STANDARD THICKNESS [MM]	STANDARD DENSITY [KG/M ³]
1.2 x 4.0	30,50,75,100	80,100,128

Facing

CODE	FACING
B5XX	Blanket with G.I Wiremesh Support on One side
B55X	Blanket with G.I Wiremesh Support on Both side
B6XX	Blanket with Stainless Steel Wiremesh Support on One side
B66X	Blanket with Stainless Steel Wiremesh Support on Both Side

Thermal[®]

FRF Slabs

For more info
055 6398292

FRF



Facings		Types		Applications
Code	Description	Code	Description	
	Reinforced Aluminum Foil	SXXX	Slab without facing	Designed for a wide range of applications, at both high and low service temperatures, and can be used on flat or slightly curved surfaces for thermal and acoustic insulation. They are suitable for thermal insulation of ducts, tanks, large vessels, oven, furnaces, boilers and other industrial equipments as well as for cavity walls, curtain walls and sandwich panels. It is also ideal for fire protection of steel structures and insulation of bulk heads and ship decks. High density slabs are suitable for applications where high compressive strength is required and where the insulation is subjected to mechanical loads and vibration. They are ideal for traffic areas and insulation of tank roofs.
		S2XX	Slab with reinforced aluminum foil on one side	
	Black Ceiling Veil	S22X	Slab with reinforced aluminum foil on both sides	
		S4XX	Slab with Black ceiling veil on one side	
		S44X	Slab with Black ceiling veil on both sides	

Thermal[®]

Fujairah Preformed Pipe Section

For more info
055 6398292

FRF



Applications

FRF preformed pipe section is suitable for thermal and acoustic insulation pipe works, its combination of density, strength and excellent thermal conductivity at high operating temperatures offer efficient thermal insulation. It is highly applicable for industrial steam and process pipe lines in oil refineries, metal industries, chemical plants and power stations. It also has the versatility to be used in heating and ventilating or other non-industrial applications.

Standard Delivery

Nominal Pipe Size [Inches]	Inner Diameter [mm]	Standard Thickness [mm]	Standard Density (Kg/m ³)
1/2	21	50, 75, 100	100, 128
3/4	27	50, 75, 100	100, 128
1	34	50, 75, 100	100, 128
1 1/4	42	50, 75, 100	100, 128
1 1/2	48	50, 75, 100	100, 128
2	60	50, 75, 100	100, 128
2 1/2	76	50, 75, 100	100, 128
3	89	50, 75, 100	100, 128
3 1/2	102	50, 75, 100	100, 128
4	114	50, 75, 100	100, 128
5	140	50, 75, 100	100, 128
6	168	50, 75, 100	100, 128
7	194	50, 75, 100	100, 128
8	219	50, 75, 100	100, 128
9	244	50, 75, 100	100, 128
10	273	50, 75, 100	100, 128
12	324	50, 75, 100	100, 128
14	356	50, 75, 100	100, 128
16	406	50, 75, 100	100, 128
18	458	50, 75, 100	100, 128
20	508	50, 75, 100	100, 128
22	556	50, 75, 100	100, 128
24	610	50, 75, 100	100, 128

Standard Available Products

Standard Size [MTR]	Standard Thickness [MM]	Standard Density [KG/M ³]
1.2	50,75,100	100,128

Facing

Code	Description
CXX	Unfaced Pipe section
C2XX	Pipe section with Aluminum Foil Facing



Product Attributes and Benefits:

Attributes	Benefits:
Asbestos Free	Environment Friendly
Moisture Resistant	Long Lasting
Sound/ Thermal Insulation	Comfortable interiors
Termite Resistance	Not degraded by any living organisms.
Dimensional Stability	With-in-tolerance limits
Fire Resistance	Non combustible; Non Toxic
Flexible	Ensures double handling
Easy Workability	Very easy to work with the carpenter tools (sawing, cut and snap, screwing, nailing and stapling)
Good Adhesion	Can take all type of finishes (paint/wall paper)
Eco Friendly	Wood substitute and environment friendly
Weather Resistance	Withstands cyclic weather changes

Board Sizes & Thicknesses

Product	Thickness mm	Width mm	Length mm
Board Square Edge	5,6,9, 12,16,18,20	600 610 1200 1220	2400, 2440 2700, 3000 3200
Board Recess Edge	9 & 12	1200 1220	2400, 2440 2700, 3000 3200
Wood Texture Planks	8	230	2500
Designer Board Internal Cladding	6,8	600 610 1200 1220	1200 2400 2440
Designer Board Ceiling	5	600 610	600 610 1200 1220

Thermal

EVEREST

Fiber Cement Board

For more info
050 2873366



Impact Resistant



Moisture Resistant



Termite Proof



Fire Resistant

Areas of Application	Finishing Choices	Physical Specifications
Internal / External Walls Internal Wall linings False Ceilings Eaves & Soffit Lining, Facia and Duct Coverings Pre-fabricated Shelters Roof Tile Underlay Flooring Substrate	Regular & Texture Wall Render Plaster	Sizes: 1.22m x 2.44m Thickness: 4mm, 6mm, 8mm 10mm, 12mm, 16mm 18mm, 20mm

For Construction Industry - Residential / Commercial



Comfort SA Slab

Density (Range):
40 Kg/m³ to 130 Kg/m³
Size: 1.2 mtr x 0.6 mtr

Applications

External building applications

- Concrete roofs
- Metal roofs
- Cavity wall
- Curtain wall
- Ventilated facade
- EIFS

Internal building applications

- Partition walls
- Floor



Comfort SA Roll

Size: 1.2 mtr x 5 mtr

>>> For more info: www.thermal.ae

For Technical Industry



Tech SA Slab

Density (Range):
100 Kg/m³ to 130 Kg/m³
Size: 1.2 mtr x 0.6 mtr

Applications

- Boilers & ovens
- Chimneys & exhaust
- Tanks vessels
- Pipe work
- Process equipment



Tech SA Wired Mat

Size: 1.2 mtr x 4 mtr



Tech SA Pipe Section

Size: Various Pipe Sizes

>>> For more info: www.thermal.ae

Thermal[®]

Acoustic Panel

**For more info
050 8502300**

ThermalPyramid Foam

Pyramid foam is a sharp looking, but traditional acoustic treatment usually found in recording studios and spaces where reverberation needs to be controlled. Although it is part of recording tradition, the design appeal of this acoustic foam is timeless. With its laser accurate straight lines and mythologically inspiring tall cubic peaks, it is the ideal statement cladding for any modern space.



ThermalEgg Foam

Egg foam is designed to provide acoustic control in a room by reducing reverberation, reflections and flutter echoes. This particular acoustic treatment has traditionally been found in critical listening environments, but Sound Zero Egg foam is an acoustic panel that has been given a modern makeover and our colourful designs have been specified into hundreds of offices over the world.



Thermal[®] Rubber Sheet

For more info
052 6921077



Key Specifications

Our Rubber Sheets has good physical properties including good high Anti-slip, Anti-wearing surface, anti-slipping and anti-fatigue. Floor protection against abrasion & damages It is predominantly used as matting for ground protection purpose

Our rubber sheets are suitable for a wide range of applications. They are very easy to work with and can be applied simply and efficiently for a variety of purposes

Our Range of Rubber Sheet

Industrial Rubber Sheet: SBR, NR, NBR, CR, EPDM rubber sheet Special industrial rubber sheet: Anti-static electricity, Antislip wearproof, oil-resistance Anti-slip rubber sheet: Round button, Diamond, Checker, Wide/Fine ribbed

Features:

1. Non-slip rubber sheet, all kinds of patterns on its surface, look elegant.
2. Featured by shock absorption, noise reduction, pressure resistance, and wear resistance.
3. Safe, Eco-friendly, water-proof, fire-proof and antiskid.
4. Easy to be installed and maintained.

Material	: NBR/NR/SBR/EPDM/CR Rubber	Width	: 1.2 m
Patterns	: Ribbed/Dots/Diamond & More	Length	: 10 m
Thickness	: 1 mm to 20 mm		

Facade Insulation



Facade Slab 35

KNAUF range of glass mineral wool slabs designed for external wall, systems providing thermal, fire and water resistant properties .

Facade Slab 33 Super



Slab 33 Ultimate

>>> For more info: www.thermal.ae

Acoustic Insulation



Acoustic Roll

Acoustic Roll is designed specifically for the sound insulation of metal stud partitions. Using mineral wool as a sound absorbent Layer in partitions will significantly improve their acoustic performance , It complements Gypsum board by absorbing air borne sound , Acoustic roll are 1220 mm and ready cut to produce two 610 mm wide rolls.

Acoustic Slab super



Acoustic Slab Ultimate

>>> For more info: www.thermal.ae

Duct Wrap



Duct Wrap Roll



Duct Wrap Slab

Duct Liner



Duct Liner Roll



Duct Liner Slab

Knauf Pipe Insulation



Knauf Insulation Pipe Insulation is a molded, heavy-density, one-piece insulation made from inorganic glass strands bonded with ECOSE[®] Technology. It is produced in 1.2m lengths with or without a factory-applied jacket.

>>> For more info: www.thermal.ae

Thermal[®] Aerolam Bubble Insulation



Aerolam Premium/Premium PE

Roll Size (W X L)	Bubble Size	Reflection Ratio	Temp. Range
1.2m X 40m	4mm x 10 mm Ø 8 mm x 10 mm Ø	97% Thermal Resistance Emissivity 0.03-0.04	-122 F to 230 F (-50°C to 110 °C)
Application: Roof/Wall/Cabinet/Packaging/Warehouse Insulation			



Aerolam Reflective Insulation (Plain Aluminium Foil)

Roll Size (W X L)	Reflection Ratio
1.2m X 30m Thickness: As per Request	97% Thermal Resistance Emissivity 0.03-0.04


Thermal[®]

For more info
050 4689388


Gypsum Complete Range...




Regular Gypsum Board

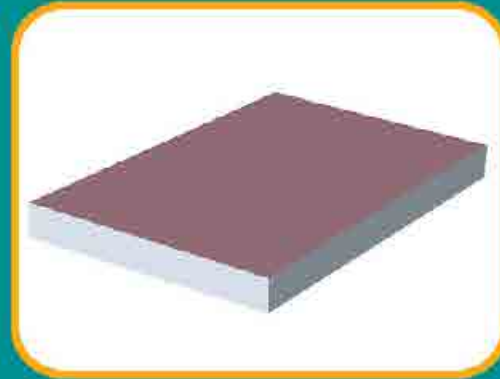

Fire Resistant Board

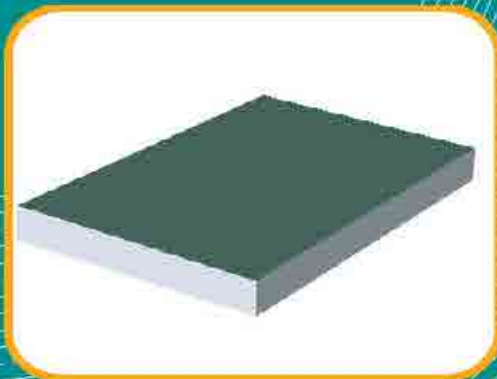

Moisture Resistant

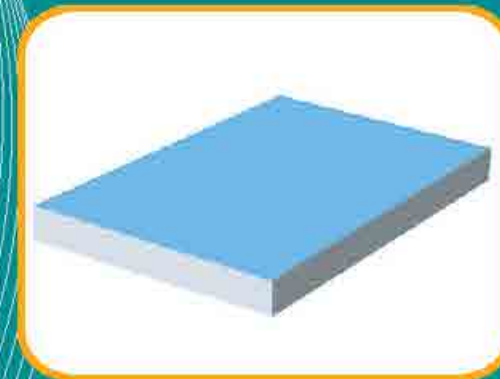

Pro HD Board

KNAUF

**UNITED
GYPSUM**

جيسمنا
gypsemna



Unicel Cellips

**Gypsum
Accessories**

Page-16

Build your Home with Thermal

Thermal[®] KNAUF Gypsum Boards

For more info
050 4689388



KNAUF Regular Board

Sizes(Mtr)		Thickness	Appearance
Width	Length	(mm)	
2.4 3	1.2	12.5, 15	Ivory



KNAUF Moisture Resistant Board

Sizes(Mtr)		Thickness	Appearance
Width	Length	(mm)	
2.4 3	1.2	12.5, 15	Green



KNAUF Fire Resistant Board

Sizes(Mtr)		Thickness	Appearance
Width	Length	(mm)	
2.4 3	1.2	12.5, 15	Pink



KNAUF Pro HD Board

Sizes(Mtr)		Thickness	Appearance
Width	Length	(mm)	
2.4	1.2	12.5, 15	Blue

All other Types of Gypsum Boards Also Available

Thermal[®] *XLPE / Polyolefin Insulation*

For more info
052 6921077


An Ideal Cold Insulation solution for MEP/HVAC/ Pipe Insulation Ducting in Commercial, Residential and OEM Solutions



Pipe Insulation Sheet

Thickness(mm)	13/15/19/25
Dia(inch)	Up to 18"
Length(mtr)	1.2/1.5mtr
Facing	Aluminium Foil & Acrylic Adhesive Backing
Temperature	-80 °C to +100 °C

For More Info Contact Sales...

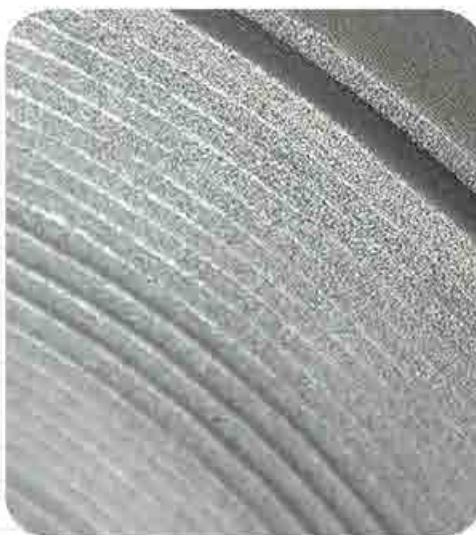

Duct Insulation Sheet

Thickness(mm)	12-50mm
Width(mtr)	1.2/1.5mtr
Length(mtr)	10-20mtr/Roll
Facing	Aluminium Foil & Acrylic Adhesive Backing
Temperature	-80 °C to +100 °C

For More Info Contact Sales...



Thermal[®]

Geotextile

For more info
055 6398185



We offer Bonded Thermal & Non Thermal Bonded Geotextile Products

Available in Range of 100 GSM to 1200 GSM
Available in 3m to 6m (wide) & 100 m (length) per Roll

Applied in walks of Life,,,



Roads Construction & Repairs



Paved Runways



Rail Track Stabilization



Pavement Overlays




Landscaping & Sports Fields



Drainage Systems



Pipe Lining & Foundation




Canal, Period & Reservoir Lining



Roofing Systems



Erosion Control



Coastal Protection



Landfill Systems



Our Expanded Polystyrene

For more info
050 8502300



THERMOKOLE Polystyrene Sheets/Slabs

Density(kg/m ³)		Thickness		Width (m)	Length (m)	Facing
Min.	Max.	Min.	Max.			
10	50	10mm	1250mm	Upto 1.2	Upto 6.0	Unfaced



THERMOKOLE Polystyrene Pipe Section/Shape Moulding

Density(kg/m ³)		Thickness		Diameter		Facing
Min.	Max.	Min.	Max.	Min.	Max.	
10	50	25mm	100mm	¼ Inch	14 Inch	Unfaced/ Aluminium Foil



THERMOKOLE Polystyrene Decorative Products

Density(kg/m ³)		Applications	Measurement
Min.	Max.		L x W x H
10	50	I) Events/Exhibition Stands II) Educational Art/Craft III) Interior Decor Shapes IV) Shopping Mall Display Decor	Based on products



THERMOKOLE Expanded Polystyrene Beads & Chips

Density(kg/m ³)		Applications
Min.	Max.	
10	50	I) Packaging II) Decoration III) Education Art & Craft IV) Furnishing Industries

Thermal[®] E-FOAM XPS Extruded Polystyrene

For more info
050 8502300



E-FOAM XPS - Extruded Polystyrene Sheets are Manufactured in United Arab Emirates, **E-FOAM XPS** is used in wide area of Applications related to Construction, Insulation, Interior Decorations, Water Proofing & so on...

Properties of the **E-FOAM XPS** are:

- Excellent Thermal Performance
- High Compressive Strength
- Low Weight
- Outstanding Impact Absorption, and
- High Resistance to water penetration

PRODUCT	DESCRIPTION	MAJOR APPLICATION	BOARD DIMENSIONS
E-FOAM ROOF FIX	Extruded Polystyrene rigid foam with skin. It is available with and without shiplap edge treatment, other thicknesses available upon request	Thermal Insulation board for Roof, Density of Roof fix is 32-35kgs/m ³ For upside down roof below the gravel protecting Roof Concrete.	Roof -fix with shiplap edges, thicknesses: 30,40,50,75 & 100mm. Width 600mm(covering dimension) Length : 1250mm(covering dimension) Other thicknesses will be available upon request.
E-FOAM WALL FIX	Extruded Polystyrene rigid foam with skin. It is available with and without shiplap edges/tongue and groove edge treatment	Thermal insulation boards for: Walls, Tile backing Core materials for sandwich panels Low temperature space Density of wall fix is 32-35kgs/m ³ uses in between internal standard walls/external brick wall.	Wall-fix with shiplap/tongue & Groove edges/butt edges Thickness: 30,40,50,75 & 100mm. Width : 600mm. Length : 2500mm/1250mm Other length and thicknesses available upon request
E-FOAM FLOOR FIX	Extruded polystyrene rigid foam with skin, high density and compressive strength. It is available with or without shiplap edge treatment.	Floors, Colds stores Parking decks, Density of floor fix is 40-45kgs/m ³ Below the floor concrete slabs /damp proof membrane.	Floors, Cold stores Parking decks, Density of floor fix is 40-45kgs/m ³ Below the floor concrete slabs /damp proof membrane.

Thermal[®] Closed Cell Elastomeric/Rubber Insulation

For more info
052 6921077

Rubber Insulation/Elastomeric Rubber Insulation is usually in black color and is manufactured in pre-formed Flexible tubes and sheets. An Ideal Insulation that prevents Condensation and Losses of Energy.

Rubber Insulation/Elastomeric Rubber Insulation is widely used in the field of Air-conditioning, Constructions Refrigeration, and used for ducts, pipes, valves and vessels since it is flexible and easily fabricated. Also Suitable for thermal insulation of complex shapes.

Closed cell applied wherever condensation control, energy conservation and frost protection in the temperature range of -40°C to $+120^{\circ}\text{C}$

Properties:

- Durable & Flexible.
- Excellent Thermal & Insulation Efficiency.
- Good Condensation Control.
- Good Resistance to Chemical Reaction.
- Resistance to Ozone and Bacterial Attack.
- Exceptional Flexibility and Easy Handling.
- Easy Installation and Environment Friendly.



Rubber Insulations Sheets

Thickness		Temperature		Facing
Min.	Max.	Min.	Max.	
9mm	50mm	-40°C	$+120^{\circ}\text{C}$	Unfaced Alum Foil Self Adhesive



Rubber Insulations Tubes

Sizes(Inches)		Thickness		Temperature	
Min.	Max.	Min.	Max.	Min.	Max.
3/8"	6"	9mm	32mm	-40°C	$+120^{\circ}\text{C}$

Thermo PUF/PIR/Phenolic Foam

For more info
050 8502300

Polyurethane & Polyisocyanurate & Phenolic Foam



Thermo PUF/PIR/Phenolic Foam is Closed Cell Rigid foam material available in the form of Boards, Sheets, Pipe sections, Curved segments applied in Building Wall, Roof and Flooring, Pipe Insulations and wherever Thermal Insulation protection is required, in combination with various facings like Aluminium-foil, Kraft paper, B.F.G, etc.,

Thermo PUF/PIR/Phenolic Foam with it's Low Thermal Conductivity Properties:

- Offers Optimum Insulation.
- Leads to large energy saving and thus reduce power cost.
- Cost effective and easy to install thus saving installation cost.
- Offer excellent mechanical strength.

Thermo PUF Sheets

Thickness		Width (m)	Length (m)	Facing
Min.	Max.			
20mm	500mm	Upto 1.2	Upto 2.0	Unfaced Aluminium Foil Kraft paper, B.F.G

Thermo PIR Sheets

Thickness		Width (m)	Length (m)	Facing
Min.	Max.			
20mm	500mm	Upto 1.2	Upto 2.0	Unfaced Aluminium Foil Kraft paper, B.F.G

Phenolic Foam

Thickness		Width (m)	Length (m)	Facing
Min.	Max.			
20mm	500mm	Upto 1.2	Upto 2.0	Unfaced Aluminium Foil Kraft paper, B.F.G


* Note: Pipe Sections & Segments shall be Manufactured as per Client's request.

FIRE RATED CALCIUM SILICATE BOARDS



Calcium Silicate Board	
Density(kg/m ³)	880 (kg/m ³)
Thickness(mm)	6/8/10/12
Size (LxW)(mtr)	1.22 x 2.44 mtr
	1.83 x 1.22 mtr
	2.44 x 1.22 mtr
Application:	Wall Board, Partition Walls Ceiling, Cladding, Carpentry

FIBRE CEMENT BOARDS

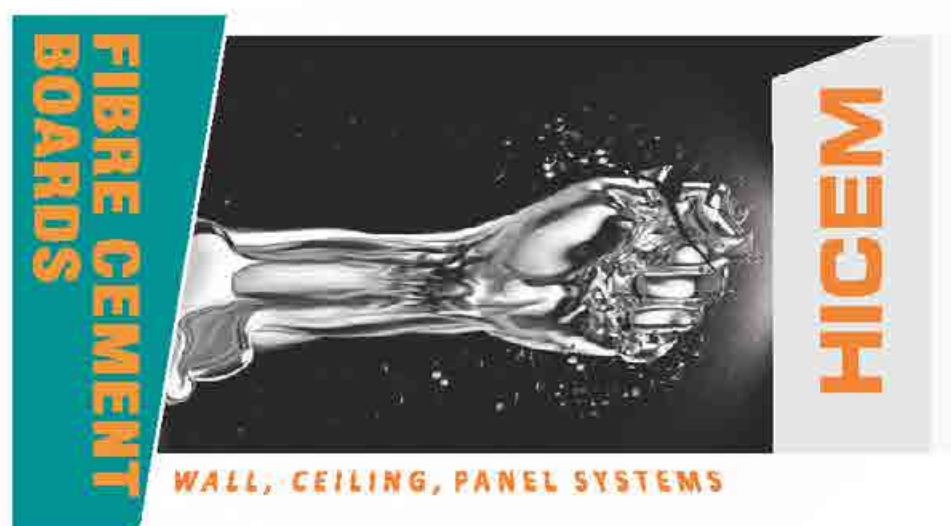

Fibre Cement Board	
Density(kg/m ³)	850 (kg/m ³)
Thickness(mm)	6/8/10/12
Size (LxW)(mtr)	1.22 x 2.44 mtr
	1.83 x 1.22 mtr
	2.44 x 1.22 mtr
Application:	Wall Board, Partition Walls Ceiling, Cladding, Carpentry

Visit us @ www.thermal.ae

Dubai - Sales & Distribution Center

Thermal Insulation
Ind. Area - 3, Al Quoz, Dubai-UAE
Opp. Al Ahli Driving School
Tel +971 4 882 0848
Mob: +971 50 287 3366
E-mail: trading@thermal.ae
United Arab Emirates



@ThermalBuildingProducts

Sharjah - Sales & Distribution Center

Thermal Insulation
Ind. Area No. 17, Behind Safeer Market
Sharjah Kalba Road, Sharjah - UAE
Mob: 050 8502300
E-mail: sales@thermal.ae
United Arab Emirates

Sajja-Warehouse & Logistics Facility

Sajja Warehouse:
Thermal Insulation
Tel : +971 6 5351071,
E-mail: sales@thermal.ae
United Arab Emirates

UAE - Corporate Office

Thermal Insulation
Tel : +971 6 5351071
E-mail: sales@thermal.ae
United Arab Emirates

India Sales Office

Thermal Insulation
4 by 8 Ceramics
Tel : +919892466660
E-mail: sales@4by8.in
Navi Mumbai, India

www.thermal.ae