



CATALOGUE 2016



www.hdhandle.com

HDSAFE Movable Glass Partition System

移动隔断系统



HDSAFE Movable Glass Partition System
移动隔断系统

佛山市华的金属制品有限公司 (原佛山市顺德区国华五金厂) 地址: 佛山市三水区白坭镇三水大道南96号

Foshan Huadi Metal Produce Co., Ltd (Old name: Foshan Guohua Metal Produce Co., Ltd)

Add: No.96 South of Sanshui Avenue, Baini Town, Sanshui District, Foshan City

E-mail: hdexport@vip.163.com chenrui.sh@163.net [Http://www.hdhandle.com](http://www.hdhandle.com)



INNOVATION THAT'S
OUT OF YOUR IMAGINATION

PERFECT VISUAL SOLUTIONS, TRUSTWORTHY QUALITY

INNOVATION THAT'S OUT OF YOUR IMAGINATION

完美视觉方案，品质值得信赖

可移动玻璃隔断适用于多种空间的工程项目，并可以适用于室内与室外环境。其组件可根据安装位置、结构情况以及设计理念进行灵活构建，并可符合在建筑风格、材质及颜色等多方面的要求，同时可配独立构造幕墙以实现特殊功能。此外，应用赛夫配件可保证在建筑参数变化的情况下灵活的规划设计，同时可使用系统安装方便，可靠与安全，广泛应用于银行、机场、会展中心、店铺、购物中心、宾馆、培训中心、学校、医院等众多建筑领域。

凭借对建筑空间的深厚了解和丰富的工程项目经验，我们始终以客户利益为出发点，为客户量身定制整套最优化的玻璃隔断的解决方案，提供最优质的建筑空间隔断产品，以满足不同客户的需求。

Movable glass partitions are applicable for the projects of varied spaces, and even for indoor and outdoor environments. Product components can be constructed flexibly according to the installation locations, structure status, as well as design concepts, and can even meet the requirements on architectural style, materials and colors, etc. Meanwhile independently constructed curtain walls can be attached in order to achieve special effects. In addition, the use of SAFE components guarantees the brisk planning and design even in case of changed architectural parameters, ensuring easy installation, reliable and safe use of the system. They are widely used in banks, airports, convention centers, shops, shopping malls, hotels, training centers, schools, hospitals and a variety of other architectures.

With a deep understanding of architectural spaces and rich project experience, we always take customer's benefits as the starting point and tailor sets of optimal glass partition solutions for customers and provide them with superior architectural space partition products in order to meet the demands of different customers.

INNOVATION THAT'S
OUT OF YOUR IMAGINATION



INNOVATION THAT'S OUT OF YOUR IMAGINATION



SA8700A



SA8700B



SA8900A



SA8900B

Index

Expert for modern space partitioning



SA8900D



SA8900W



SA8900Z/

HDSAFE MOVABLE GLASS PARTITION SYSTEM



玻璃移动隔断系统



玻璃移动隔断系统

HDSAFE MOVABLE GLASS PARTITION SYSTEM

SA8700A

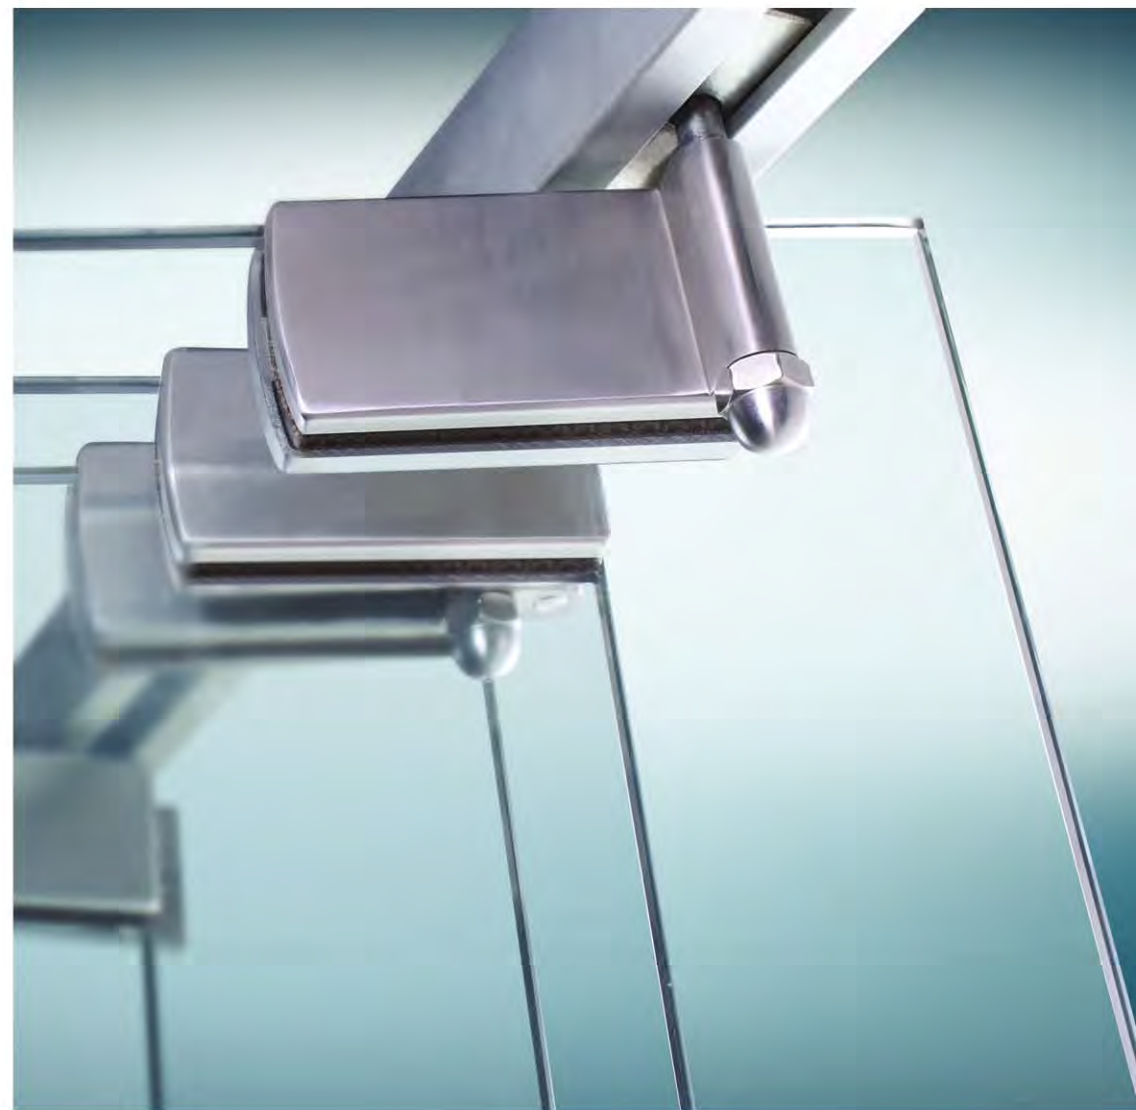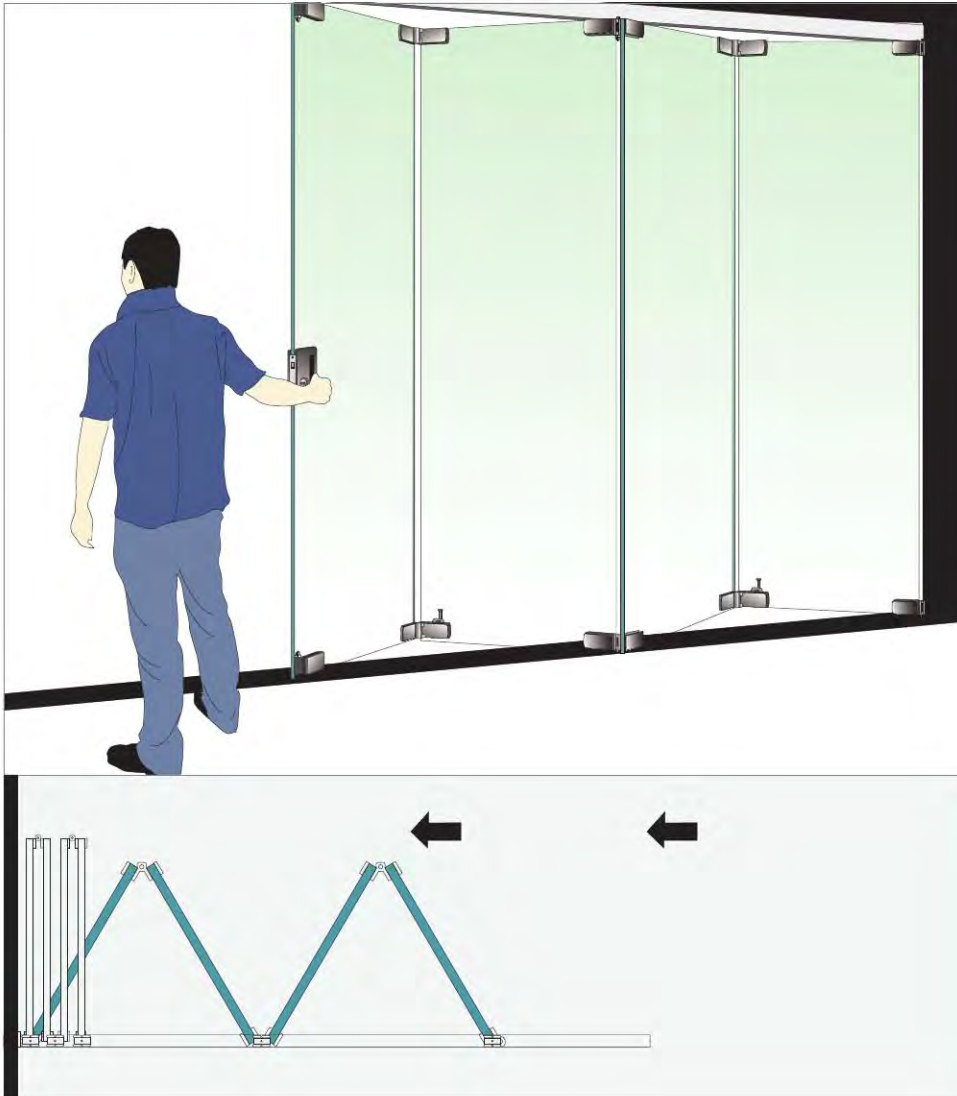

完美设计高雅风尚

HDSAFE系列折叠玻璃隔断面板可构成一连续透明的隔断，表面绝无任何边框组件。上下端玻璃门夹为系统提供必要稳定性的同时，而且折叠后收藏区所占的位置小，从而能有效的利用本产品所带来更宽敞的空间。配件材质及颜色有多种选择方案，可使系统组合之后简便的安装到位。

Perfect and graceful design

HDSAFE series of folding glass partition panels may constitute a continuous transparent partition without any border component support shown on the surface. Both upper and lower glass door clips not only provide necessary system stability, but ensure small area coverage after the system is folded. Therefore using these products will effectively lead to more spacious spaces. There are diversified options for component materials and colors, enabling easy system assembly and installation.

SA8700A

HDSAFE MOVABLE
GLASS PARTITION SYSTEM


玻璃移动隔断系统结构配件

Structural components for movable glass partition system

SA8700A-11	SA8700A-6	SA8700A-10	SA8700A-6	SA8700A-16
SA8600A-13C	SA8600A-13A	SA8700A-14	SA8700A-13R	SA8700A-12
SA8700A-13L	SA8700A-17	SA8700A-15		
折叠门夹, 装有滑轮, 下导柱夹及移门钩锁。	折叠门页, 装有滑轮及底端插销装置。	折叠门页, 装有滑轮及底端插销装置。	折叠门页, 装有滑轮及底端插销装置。	末端门页, 装有与上下固定门夹及底端插销装置。
Folding door clip, equipped with pulley, lower column clip and lock catch.	Folding door leaf, equipped with pulley and bottom bolt.	Folding door leaf, equipped with pulley and bottom bolt.	Folding door leaf, equipped with pulley and bottom bolt.	End door leaf, equipped with upper and lower fixing clips and bottom bolt.
门页最高 Max. door leaf height	2500mm	2500mm	2500mm	2500mm
门页最宽 Max. door leaf width	800mm	800mm	800mm	800mm
最大承重 Max. door leaf load	60kg	60kg	60kg	60kg

SA8700A-16
上固定门夹
Upper fixing clip

SA8700A-6
玻璃门合页
Glass door hinge


SA8700A-10
折叠门吊轮
Folding door roller

SA8700A-11
折叠门吊轮
Folding door roller

SA8700A-17
下固定门夹
Lower fixing clip

SA8700A-13L / R
玻璃门插销
Glass door bolt

SA8700A-12
下导柱门夹
Lower column clip

SA8700A-14
下导柱门夹
Lower column clip

SA8700C-1
上导轨
Upper track

SA8700A-15
下导轨
Lower track

SA8700A-18R
玻璃门插销
Glass door bolt


SA8700A-18L
玻璃门插销
Glass door bolt




玻璃移动隔断系统

HDSAFE MOVABLE GLASS PARTITION SYSTEM

SA8700B

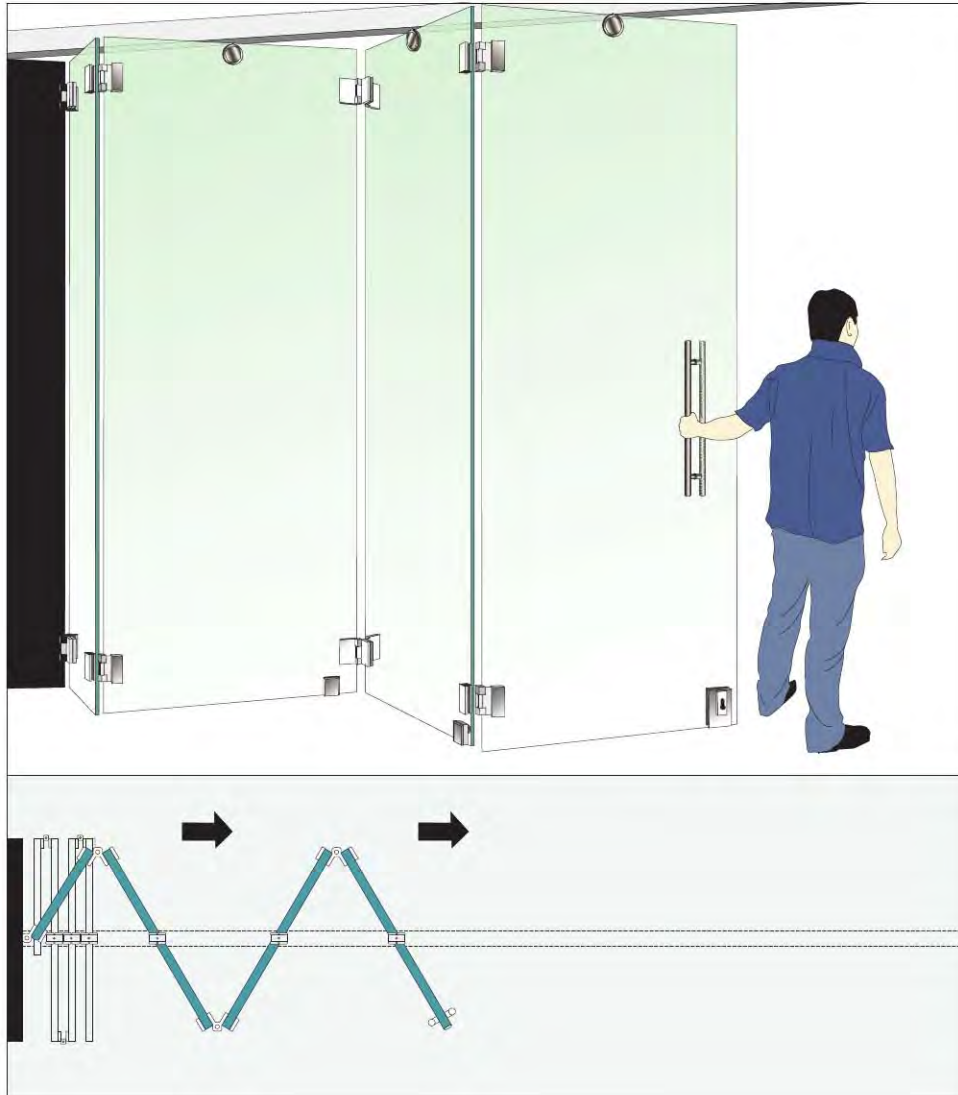

符合各种空间的优良系统

空间的适切度与实用性随着用户的不同诉求,经过设计师专业理念设计,不仅使空间每一部分均获得充分的利用,以美观性、功能性和可靠的技术,创造了有效的、经济的、适合不同门面的空间,从专卖店、展示厅到购物中心、宾馆和机场,赛夫都能满足您所设想的各种要求。

Excellent system applicable for diversified spaces

The relevance degree and practicality of spaces, with the professional design concepts, are brought to the maximum in conformity with different user demands. Not only each piece of space finds full use, but the aesthetics, functionality and reliable technology create the effective, economic and multi-shop applicable spaces. From chain shops, showrooms to shopping malls, hotels and airports, SAFE are sufficient to meet all your requirements.

SA8700B

HDSAFE MOVABLE
GLASS PARTITION SYSTEM


玻璃移动隔断系统结构配件

Structural components for movable glass partition system

SA8700B-1

折叠门吊轮
Folding door roller


SA8500H-7

玻璃与玻璃合页
Glass to glass hinge


SA8500H-8

玻璃与墙连接合页
Glass to wall hinge


SA8700C-1

轨道
Track


SA7060

角锁
Corner patch lock


SA7123

玻璃门插销
Glass door bolt



SA7124

插销套
Bolt sleeve



SA7125

推拉门锁扣
keep box for wall


	SA 8700B-1	SA 8700B-1	SA 8700B-1	SA 8700C-1
	SA 8500H-7	SA 8500H-7	SA 8500H-7	SA 8500H-8
	SA 7060	SA 7123	SA 7123	SA 7123
	SA 7125	SA 7124	SA 7124	SA 7124
	折叠门页, 装有滑 轮, 底端上锁装置。	折叠门页, 装有 滑轮及底端插销 装置。	折叠门页, 装有 滑轮及底端插销 装置。	末端门页, 装有与墙 体固定合 页及底端 插销装置。
	Folding door leaf, equipped with pulley and bottom lock.	Folding door leaf, equipped with pulley and bottom bolt.	Folding door leaf, equipped with pulley and bottom bolt.	End door leaf, equipped with wall- fixation hinge and bottom bolt.
门页最高 Max. door leaf height	2500mm	2500mm	2500mm	2500mm
门页最宽 Max. door leaf width	800mm	800mm	800mm	1/2门页 ~12mm
最大承重 Max. door leaf load	60kg	60kg	60kg	—



SA8700B-W

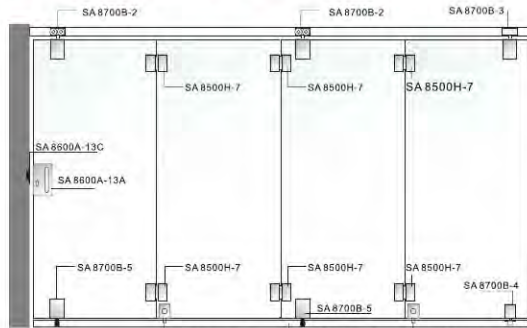

玻璃移动隔断系统结构配件

Structural components for movable glass partition system

SA8700B-2

折叠门吊轮
Folding door roller


SA8500H-7

玻璃与墙玻璃合页
Glass to glass hinge


SA8700B-3

上固定门夹
Upper fixing clip


SA8700B-4

下固定门夹
Lower fixing clip


SA8700B-5

下导柱夹
Lower column clip


SA8700B-6

玻璃门插销
Glass door bolt


折叠门页，
折叠门吊轮，
及下导柱夹
及移门钩锁

Folding door leaf,
folding door
hanging pulley,
lower column
clip and lock catch.

折叠门页，
折叠门吊轮
及底端插销装置。

Folding door leaf,
folding door
hanging pulley,
and bottom bolt.


折叠门页，
折叠门吊轮
及底端插销装置。

Folding door leaf,
folding door
hanging pulley,
and bottom bolt.

末端门页，装有
上、下固定门夹
及底端插销装置。

End door leaf,
equipped with
upper and lower
fixing clips and
bottom bolt.

门页最高 Max. door leaf height	2500mm	2500mm	2500mm	2500mm
门页最宽 Max. door leaf width	800mm	800mm	800mm	800mm
最大承重 Max. door leaf load	60kg	60kg	60kg	60kg



SA8700C-1

上轨道
Upper track


SA8700A-15

下导轨
Lower track



SA8600A-13C

锁扣
Lock cover


SA8600A-13A

移门钩锁
Moving door lock


SA8700B-Z

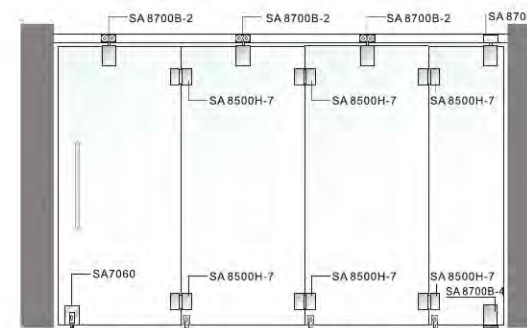

玻璃移动隔断系统结构配件

Structural components for movable glass partition system

SA8700B-2

折叠门吊轮
Folding door roller


SA8500H-7

玻璃与墙玻璃合页
Glass to glass hinge



SA8700B-3

上固定门夹
Upper fixing clip


SA8700B-4

下固定门夹
Lower fixing clip


门页最高 Max. door leaf height	2500mm	2500mm	2500mm	2500mm
门页最宽 Max. door leaf width	800mm	800mm	800mm	1/2门页 +63mm
最大承重 Max. door leaf load	60kg	60kg	60kg	—



SA8700C-1

轨道
Track


SA7060

角锁
Corner patch lock


SA7123

玻璃门插销
Glass door bolt


SA7124

插销套
Bolt sleeve


SA7125

推拉门锁扣
keep box for wall



SA8700E HDSAFE MOVABLE GLASS PARTITION SYSTEM



玻璃移动隔断系统结构配件

Structural components for movable glass partition system

SA 8700E-7	SA 8700E-3	SA 8700E-5	SA 8700E-3	SA 8700E-1
SA 8700C-2	SA 8700C-2	SA 8700C-2	SA 8700C-2	SA 8700C-2
SA 8600A-13C	SA 8600A-13A	SA 8700E-4	SA 8700E-6	SA 8700E-4
SA 8700E-8	SA 8700E-2	SA 8700E-4	SA 8700E-2	SA 8700E-2
SA 8700C-3	SA 8700C-3	SA 8700C-3	SA 8700C-3	SA 8700C-3
折叠门夹，装有滑轮，下导柱夹及移门钩锁。 Folding door clip, equipped with pulley, lower column clip and lock catch.	折叠门页，装有滑轮及底端插销装置。 Folding door leaf, equipped with pulley and bottom bolt.	折叠门页，装有滑轮及底端插销装置。 Folding door leaf, equipped with pulley and bottom bolt.	末端门页，装有与上下固定门夹及底端插销装置。 End door leaf, equipped with upper and lower fixing clips and bottom bolt.	
门页最高 Max. door leaf height	2500mm	2500mm	2500mm	2500mm
门页最宽 Max. door leaf width	800mm	800mm	800mm	800mm
最大承重 Max. door leaf load	60kg	60kg	60kg	60kg

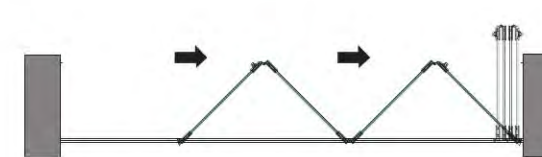

HDSAFE MOVABLE GLASS PARTITION SYSTEM


玻璃移动隔断系统



玻璃移动隔断系统

HDSAFE MOVABLE GLASS PARTITION SYSTEM

SA8900A

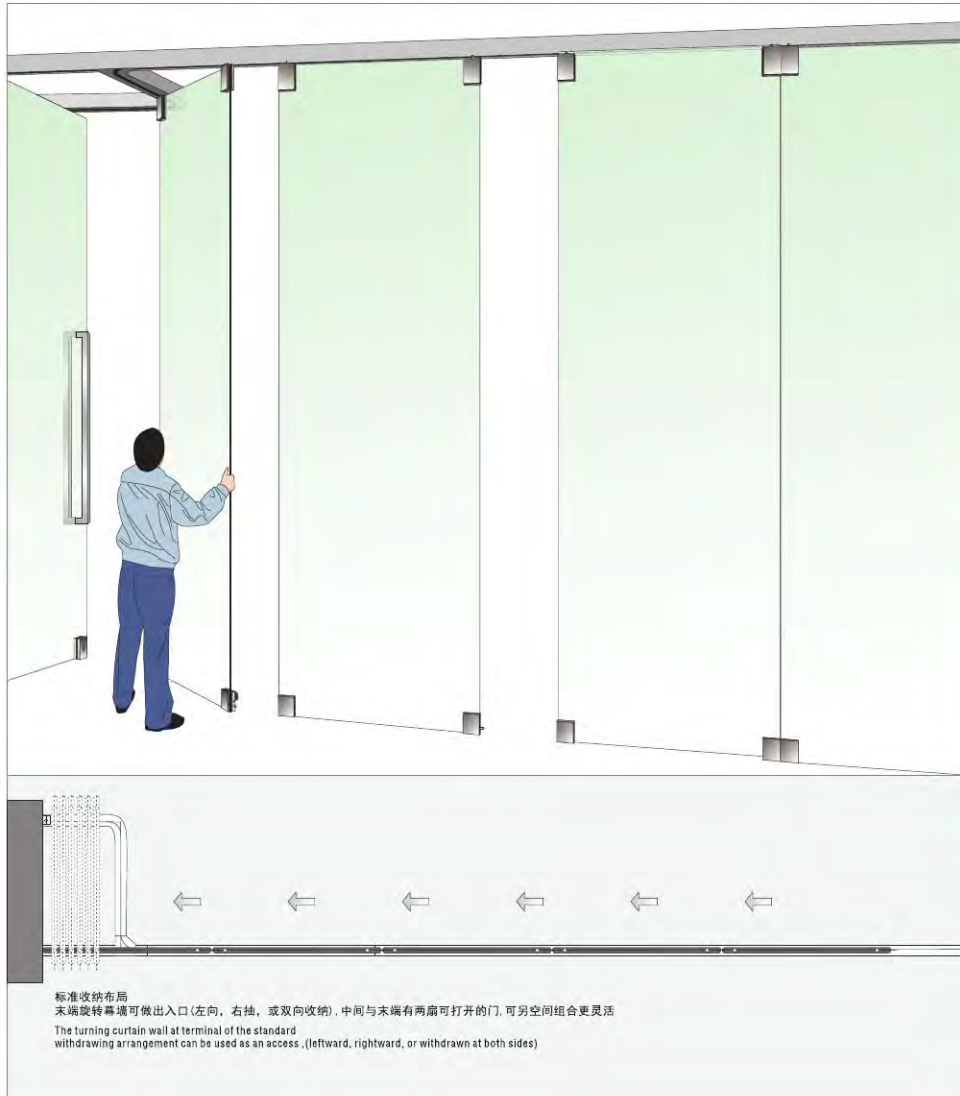

标准收纳布局
末端旋转幕墙可做出入口(左向, 右抽, 或双向收纳), 中间与末端有两扇可打开的门, 可另空间组合更灵活
The turning curtain wall at terminal of the standard
withdrawing arrangement can be used as an access. (leftward, rightward, or withdrawn at both sides)



SA8900A系列玻璃移动隔断门夹功能

水平移动式幕墙, 全玻璃结构, 带上下门夹。简约型设计玻璃移动隔断, 系统有由一片单向或双向推拉式末端门页和若干移动式门页组成, 可满足基本空间隔断和店面系统的要求, 简洁、美观、大方。

SA8900A series of movable glass partitions and functions

Horizontal movable curtain wall, all-glass structure with upper and lower door clips; simplified movable glass partition; the system comprises a one/two-way double-acting door leafs and a number of movable door leafs, meets the requirements of basic spatial partition and store system, being simple, graceful and generous.



SA8900A-A

HDSAFE MOVABLE
GLASS PARTITION SYSTEM

- 1、模块滑动顺畅，噪音小。
 - 2、重型轨道承载力，使隔断承载力更安全。
 - 3、转接轨道间的精密焊接，降低维修、保养率。
 - 4、多样的装饰边框效果与多种工艺处理的玻璃，提供更多的选择。
 - 5、收放灵活：隔板收放自如，推动灵活，一个人就可以完成隔断整个过程。
- 1 Smooth module movement and low noise;
 2. Heavy track load ensures the partition's loading safety;
 3. Precise welds at track joints reduce maintenance frequency;
 4. Multiple decorative frames and richly processed glass provide more options;
 5. Flexible withdrawal or opening enables only one person to complete the whole partitioning process;

玻璃移动隔断系统结构配件


Structural components for movable glass partition system

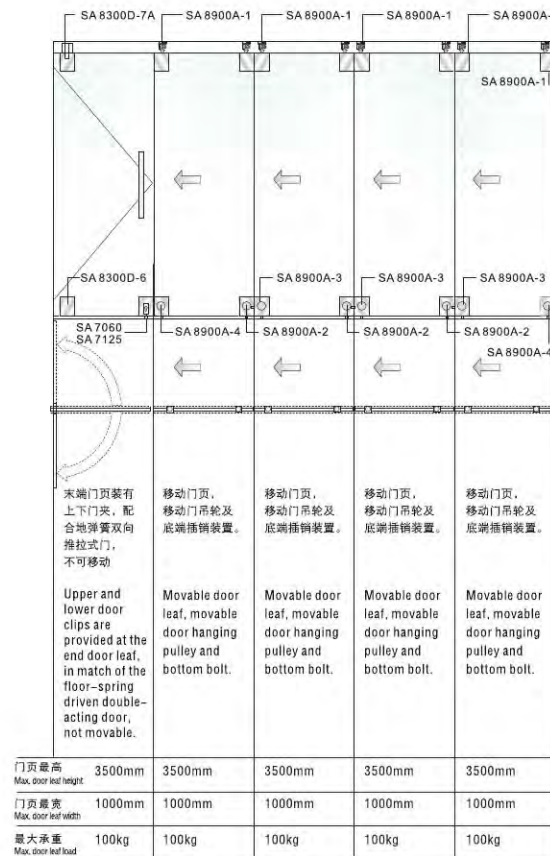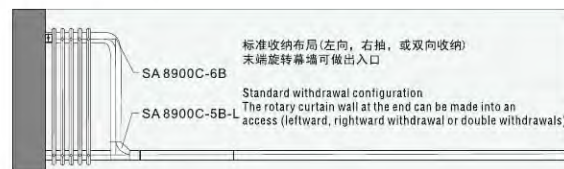SA8900A-1
玻璃夹/滑轮
Glass clip/rollerSA8900A-2
下插销(带孔)
Lower bolt (with hole)SA8900A-3
下插销(带侧销)
Lower bolt (with side bolt)SA8900A-4
下插销
Lower boltSA8300D-6
下夹
Bottom oblong patch fittingSA8300D-7A
上夹
Top oblong patch fittingSA8900C-2
上轨道
Upper trackSA8900C-5B-L/R
轨道(三通)
Track (T-piece)SA8900C-6B
轨道(弯头)
Track (elbow)

HDSAFE MOVABLE
GLASS PARTITION SYSTEM



Structural components for movable glass partition system

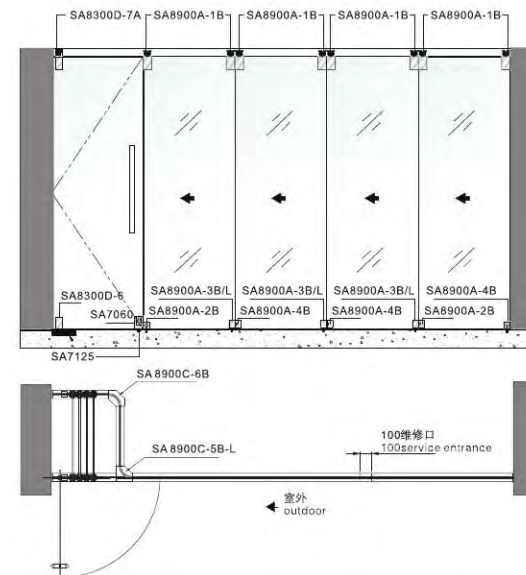

HDSAFE MOVABLE GLASS PARTITION SYSTEM


玻璃移动隔断系统



玻璃移动隔断系统

HDSAFE MOVABLE GLASS PARTITION SYSTEM

SA8900B

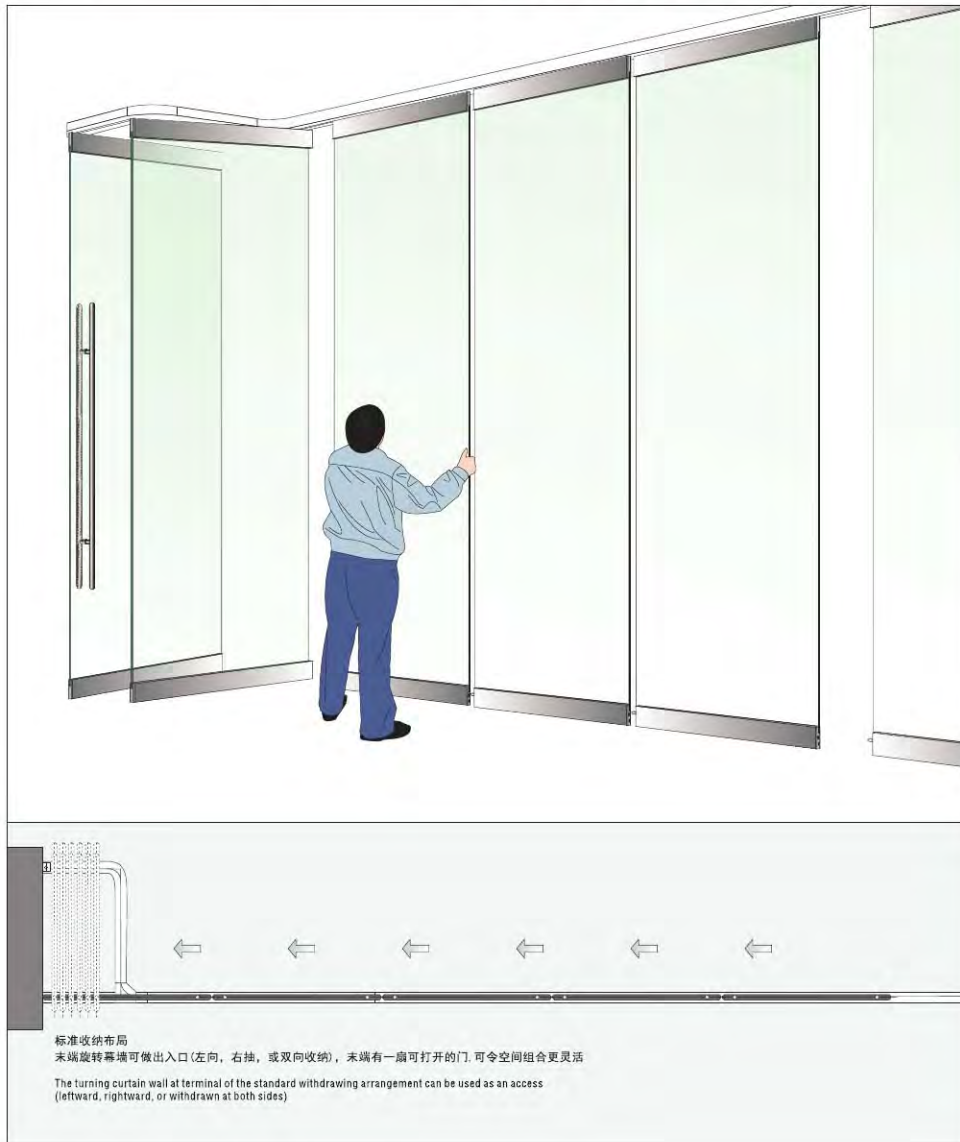

设计提供适合空间利用

对于已有结构或者非常规建筑布局而言, 玻璃移动隔断的储存区域往往需要经过特别的设计。SAFE系列隔断能停驻于一系列不同类型的区域位置。门页可以平行或垂直方式进行储存, 同时, 可将门页收纳排列而不影响出入, 可作为店内橱窗或展示区域, 亦可配合合适表面处理可以增加美感。

Designed for the utilization of space


As to the existing structure or non-conventional architectural arrangement, the storage area of the movable glass partition often needs special design. SAFE series of partitions can stay at variety types of locations. Door leaves can be stored in parallel or in a perpendicular manner; meanwhile door leaves can be withdrawn and lined without affecting access; they can be used as show windows or display area of shops, or even be subject to appropriate surface treatment to enhance the sense of beauty.


HDSAFE MOVABLE GLASS PARTITION SYSTEM

玻璃移动隔断系统

SA8900B

HDSAFE MOVABLE
GLASS PARTITION SYSTEM

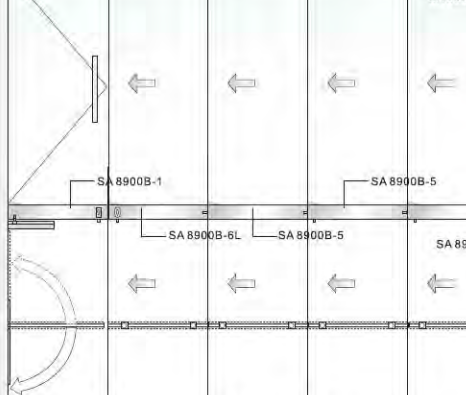	SA 8900B-2	SA 8900B-3	SA 8900B-3	SA 8900B-3	SA 8900B-3
					SA 8900C-2
	SA 8900B-1				SA 8900B-5
		SA 8900B-6L	SA 8900B-5		SA 8900B-6R
 末端门页装有上下门夹，配合地弹簧双向推拉式门，不可移动 Upper and lower door clips are provided at the end of the floor-spring driven double-acting door, not movable.	移动门页，移动门吊轮及底端插销装置。 Movable door leaf, movable door hanging pulley and bottom bolt.	移动门页，移动门吊轮及底端插销装置。 Movable door leaf, movable door hanging pulley and bottom bolt.	移动门页，移动门吊轮及底端插销装置。 Movable door leaf, movable door hanging pulley and bottom bolt.	移动门页，移动门吊轮及底端插销装置。 Movable door leaf, movable door hanging pulley and bottom bolt.	
门页最高 Max. door leaf height	3500mm	3500mm	3500mm	3500mm	3500mm
门页最宽 Max. door leaf width	1000mm	1000mm	1000mm	1000mm	1000mm
最大承重 Max. door leaf load	120kg	120kg	120kg	120kg	120kg

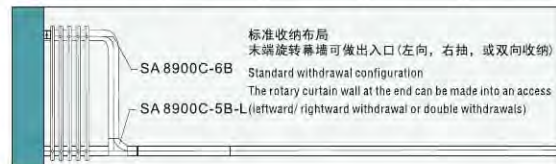


玻璃移动隔断系统结构

若不考虑独立门页的特殊功能，一套完整的玻璃移动隔断系统包括下列基本构件：

1. 安装简便的SAFE工字钢结构附件，以满足导轨的固定要求(选配件)
2. 轨道(配螺栓与附属构件以固定)
3. 滑轮系统
4. 悬挂组件
5. 上门条
6. 下门条(上下门条均包括由弹簧夹板、面板)
7. 强化安全玻璃或层压安全玻璃


Structure of movable glass partition system

- Not considering the special functions of independent doors, a complete set of movable glass partition system includes following components:
1. Easy fixing SAFE I-beam components, used to fix guide rails (optional)
 2. Track (with bolts and auxiliary parts, used for fixation)
 3. Pulley system
 4. Hanging components
 5. Upper door bar
 6. Lower door bar (both bars include spring clip plate and panel)
 7. Toughened safe glass or laminated safe glass (not provided by SAFE)

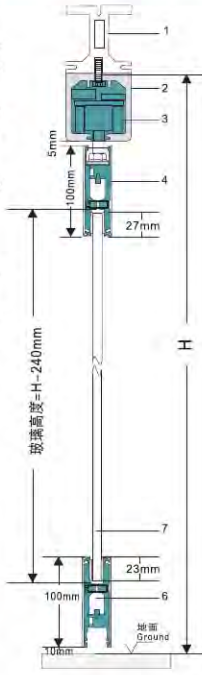

上\下门条构造。

Structure of upper/lower door bars

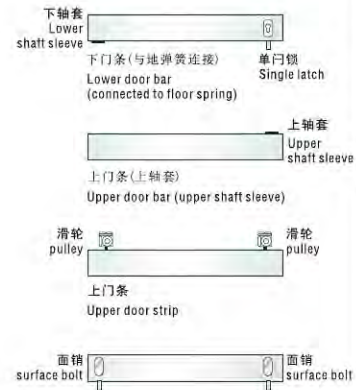

下门条(移动门页固定)
Lower door strip (fixation of movable door)

面销 (Surface bolt), 插孔 (Jack)

下门条(移动门页固定)
Lower door strip (fixation of movable door)

侧销 (Side bolt), 插孔 (Jack)

下门条(移动门页固定)
Lower door bar (fixation of movable door)

面销 (Surface bolt), 门锁 (Latch)

下门条(移动门页固定)
Lower door strip (fixation of movable door)

侧销 (Side bolt), 面销 (Surface bolt)

下门条(移动门页固定)
Lower door strip (fixation of movable door)

HDSAFE MOVABLE GLASS PARTITION SYSTEM

玻璃移动隔断系统

玻璃移动隔断系统结构配件

Structural components for movable glass partition system

SA8900B-1

下门条(单门锁)
Lower door strip (single latch)



SA8900B-2

上门条/轴套
Upper door strip/shaft sleeve



SA8900B-3

上门条/滑轮
Upper door strip/roller



SA8900B-4

下门条(双面销)
Lower door strip (double pins)



SA8900B-5

下门条(侧销+插孔)
Lower door strip (side bolt+ jack)



SA8900B-6L/R

下门条(面销+插孔)
Lower door strip (surface bolt+ jack)



SA8900B-7L/R

下门条(面销+单门锁)
Lower door strip (side bolt+ jack)



SA8900B-8L/R

下门条(面销+侧销)
Lower door strip (surface bolt+ side bolt)



SA8900C-2

轨道
Track



SA8900C-5B-L/R

轨道(三通)
Rail (T-piece)



SA8900C-6B

轨道(弯头)
Rail (elbow)





玻璃移动隔断系统

HDSAFE MOVABLE GLASS PARTITION SYSTEM

SA8900D



SA8900D 系列玻璃移动隔断门页与功能

SA8900D系列移动玻璃隔断面板可构成一连续透明的隔断, 表面绝无任何边框组件。上下端玻璃门条为系统提供必要稳定性的同时, 还可将各辅助功能组件藏起来。配件材质及颜色有多种选择方案, 可使系统组合之后简便的安装到位。每一面移动玻璃门页均可作为推拉门使用, 以提供最佳便利性, 并可选配凸轮转动式闭门器, 以最佳的便利性确保客户的出入。

SA8900D series of movable glass partitions and functions

SA8900D series of movable glass partition panels may constitute a continuous transparent partition without any border component support shown on the surface. Both upper and lower glass door strips not only provide necessary system stability, but hide the functional components. There are diversified options for component materials and colors, enabling easy system assembly and installation. Each piece of movable glass door leaf can be used as a double-acting door, to provide best convenience; cam-type rotary door closer can be used, to guarantee easiest customer access.

SA8900D



HDSAFE MOVABLE
GLASS PARTITION SYSTEM

在SA8900系统内,每一面独立门页均可经过设计担当特别功能,通过配选多种形式闭门器,或非常规安装特殊门页,此外每一隔断系统均可割据个别要求,进行组装,从简单的门页到复合功能的门页。

In the system of SA8900 products, each independent door leaf, after design, can have special functions by the use of varied door closer and installation of special door leaf; in addition, each partition system can be assembled as per specific purposes, including the use of simple or multi-functional door leaves.

SA8900D水平移动式玻璃隔断

SA8900D horizontal movable glass partition

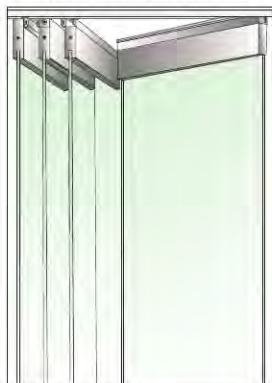

SA8900B/SA8900D

全玻璃结构 Full-glass structure

带上下门条 With upper and lower door strips

SA8900A


全玻璃 Full-glass

单点固定 One-point fixation


带标准导轨 With standard tracks

SA8900W折叠移动式玻璃隔断


SA8900W folding movable glass partition



SA8900Z+PLUS



SA8900Z



SA8900W

单边悬挂式折叠

One-side hanging folding

SA8900Z

中置式折叠

Central folding

SA8900Z

中置式折叠

Central folding

另带全尺寸独立推拉门。 With additional all-sizes independent swing curtain walls




SA8900D储存区

对于已有结构或者非常规建筑布局而言,玻璃移动隔断的储存区域往往需要经过特别的设计。赛夫SA8900D系列隔断能停驻于一系列不同类型的区域位置。门页可以平行或者垂直方式进行储存,亦可做到显形储存或者隐性储存。同时,可将门页收纳成直线形排列而不影响出入,亦可将其储存于墙后或墙内。

此外,玻璃隔断可在门面打开的条件下做特殊用途,如作为店内橱窗或展示区域,亦可配合合适量表面印刷以增加艺术美感。本手册仅向你阐述最常用之储存区域,其他实际应用请向赛夫经销商或本公司查询。

SA8900D Storage area

As to the existing structure or non-conventional architectural arrangement, the storage area of the movable glass partition often needs special design. SAFE SA8900D partitions can stay at variety types of locations. Door leaves can be stored in parallel or in a perpendicular manner; meanwhile door leaves can be withdrawn and lined without affecting access; they can be used as show windows or display area of shops, or even be subject to appropriate surface treatment to enhance the sense of beauty. In addition, glass partitions can be used for special purposes for example, used as show windows or displaying area of shops in the condition of opened door, or appropriately printed on surface, showing aesthetics. This Manual only shows you the normally used storage areas; the other actually applications, please consult SAFE dealers or contact our company directly.

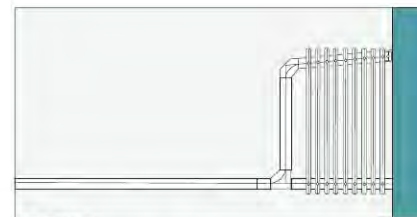


标准收纳布局

末端旋转幕墙可做出入口(左向,右抽,或双向收纳)

Standard withdrawal configuration

The rotary curtain wall at the end can be made into an access (leftward, rightward withdrawal or double withdrawals)

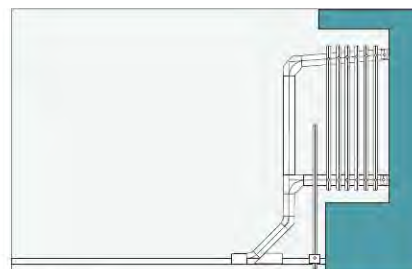


墙内收纳布局

末端旋转幕墙可做出入口(左向,右抽,或双向收纳)


Standard withdrawal configuration

The rotary curtain wall at the end can be made into an access (leftward, rightward withdrawal or double withdrawals)

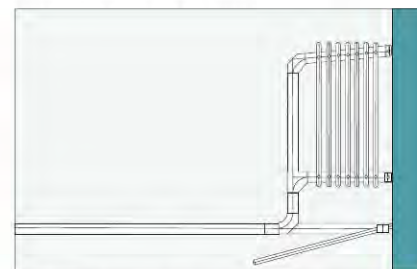

末端幕墙露出式收纳布局(左向,右抽,或双向收纳)

Exposure-type withdrawal of the curtain wall at the end (leftward/ rightward withdrawal or double withdrawals)

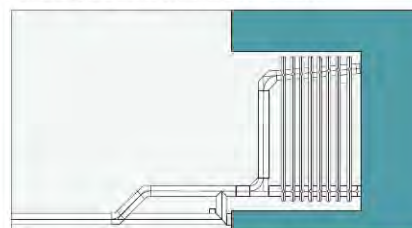


带幕墙序列重排导轨式收纳布局(无末端旋转幕墙)

收纳于突出墙面或屏风之后(左向,右抽,或双向收纳)

Re-arranged track-type withdrawal configuration with curtain wall (without rotary curtain wall at the end)

To be contained at the back of protruding wall or folding screen

(leftward/ rightward withdrawal or double withdrawals)

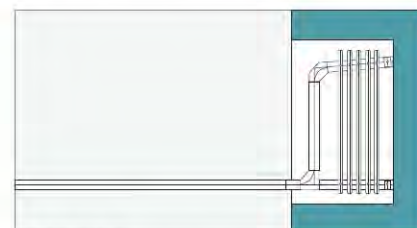

柜式/袋式收纳布局,

仅适用于移动幕墙或双向推拉式幕墙(左向,右抽,或双向收纳)

Cabinet/ pocket-type withdrawal configuration,

Only applicable for movable curtain walls or double-acting curtain walls (leftward, rightward withdrawal or double withdrawals)

HDSAFE MOVABLE GLASS PARTITION SYSTEM

玻璃移动隔断系统

SA8900D

单向推拉式移动门页在闭合时，配合凸轮传动式闭门器，

可作为一单向开合门使用。

单向推拉式移动门页，配合赛夫凸轮传动式闭门器，该类型门页应用于仅需要单向进行门开闭的场合。凸轮传动式闭门器可安装于室内，可使门扇向内开启，或者向外开启。

标准配件：上端：旋转轴承，配导轨之凸轮传动闭门器，锁具

下端：一端带面锁的下门条（作旋转轴使用，松开即不影响幕墙移动）

选配件：上端：锁具（供重排门页顺序之导轨使用）

下端：面锁，或单门锁

uring the closing of one-way double-acting movable door leaf, the door leaf can be used as a one-way opening door with the assistance of the cam-type door closer.

One-way double-acting movable door leaf and SAFE cam-type door closer can be used for the occasions where require only one-way door opening. The cam-type door closer






can be fitted indoor, to enable inward or outward door opening.

Standard components: at the upper: rotary bearing, cam-type door closer and lock

At the lower: lower door strip with surface bolt at one end (used as a turning shaft, will not affect curtain wall movement when released)

Optional parts: at the upper: lock (for the track that re-arranges door leaf sequence)

At the lower: surface bolt or single latch

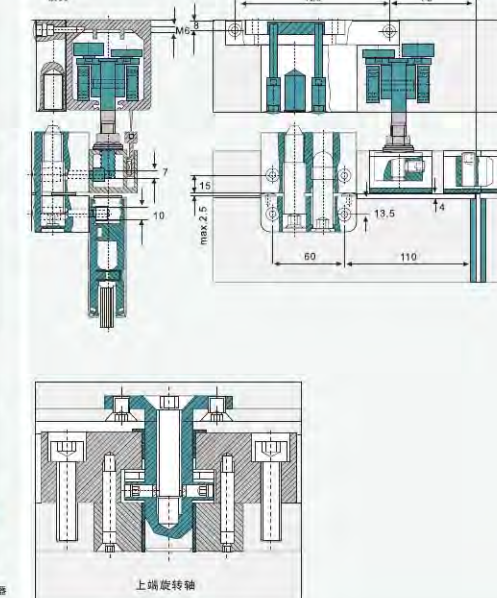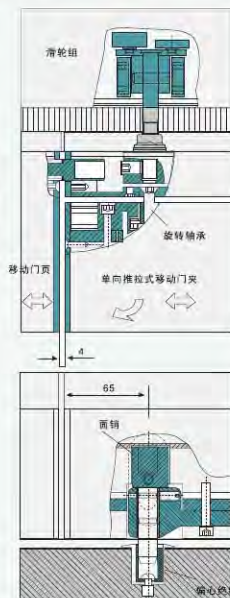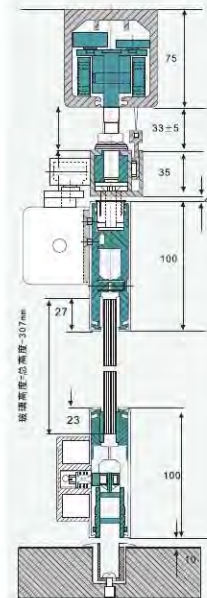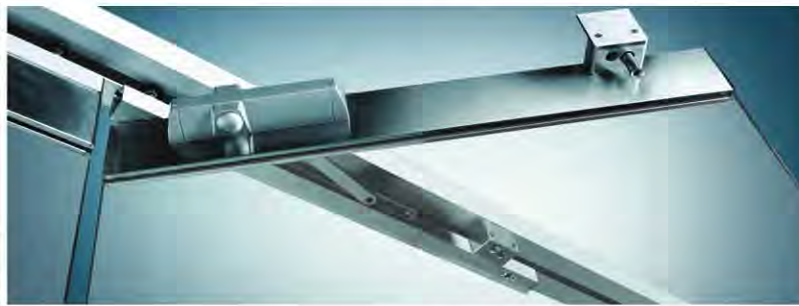

HDSAFE MOVABLE GLASS PARTITION SYSTEM

玻璃移动隔断系统

玻璃移动隔断系统结构配件

Structural components for movable glass partition system

SA8900D-3

上门条/滑轮
Upper door strip/roller



SA8900D-2

上门条(上轴套)
Upper door strip (upper shaft sleeve)



SA8900B-1

下门条(单门锁)
Lower door strip (single latch)




SA8900D-1\L\R

上门条(闭门器)
Upper door strip (door closer)



	SA 8900D-2	SA 8900D-3	SA 8900D-3	SA 8900D-1R	SA 8900D-3
	SA 8900C-1	SA 8900B-7R	SA 8900B-6L	SA 8900B-8R	SA 8900B-4
末端门页装有上、下门条，配合地弹簧，双向推拉式，不可移动。	移动门页，移动门吊轮及底端插销装置。	移动门页，移动门吊轮及底端插销装置。	移动门页，移动门吊轮及底端插销装置。	移动门页，移动门吊轮及底端插销装置。	移动门页，移动门吊轮及底端插销装置。
Upper and lower door clips are provided at the end door leaf, in match of the floor-spring driven double-acting door, not movable.	Movable door leaf, movable door hanging pulley and bottom bolt.	Movable door leaf, movable door hanging pulley and bottom bolt.	Movable door leaf, movable door hanging pulley, door closer, one-way opening and bottom bolt.	Movable door leaf, movable door hanging pulley and bottom bolt.	Movable door leaf, movable door hanging pulley and bottom bolt.
门页最高 Max. door leaf height	3500mm	3500mm	3500mm	3200mm	3500mm
门页最宽 Max. door leaf width	1200mm	1200mm	1200mm	1000mm	1200mm
最大承重 Max. door leaf load	120kg	120kg	120kg	100kg	120kg

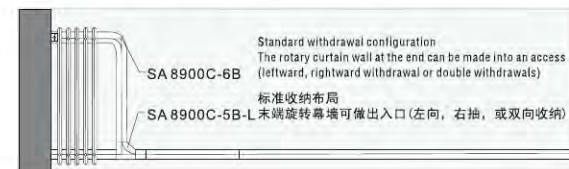

SA8900C-2

轨道
Track



SA8900C-5B-L\R

轨道(三通)
Rail (T-piece)



SA8900C-6B


轨道(弯头)
Rail (elbow)



SA8900E-B

HDSAFE MOVABLE GLASS PARTITION SYSTEM

	SA8900E-2B	SA8900E-3B	SA8900E-3B	SA8900E-3B	SA8900E-3B
地弹簧 floor spring	SA8900B-1	SA8900B-6L	SA8900B-5	SA8900B-5	SA8900B-8R
末端门页装有上下门夹, 配合地弹簧双向推拉式门, 不可移动。 Upper and lower door clips are provided at the end door leaf, in match of the floor-spring driven double-acting door, not movable.	移动门页, 移动门吊轮及底端插销装置。 Movable door leaf, movable door hanging pulley and bottom bolt.	移动门页, 移动门吊轮及底端插销装置。 Movable door leaf, movable door hanging pulley and bottom bolt.	移动门页, 移动门吊轮及底端插销装置。 Movable door leaf, movable door hanging pulley and bottom bolt.	移动门页, 移动门吊轮及底端插销装置。 Movable door leaf, movable door hanging pulley and bottom bolt.	移动门页, 移动门吊轮及底端插销装置。 Movable door leaf, movable door hanging pulley and bottom bolt.
门页最高 Max. door leaf height	3500mm	3500mm	3500mm	3500mm	3500mm
门页最宽 Max. door leaf width	1000mm	1200mm	1200mm	1200mm	1200mm
最大承重 Max. door leaf load	100kg	120kg	120kg	120kg	120kg

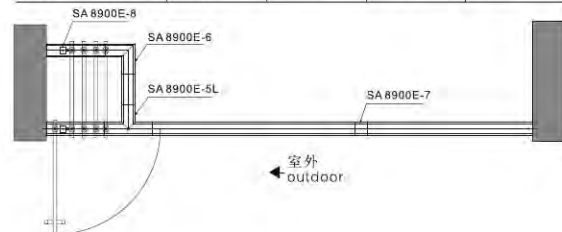

玻璃移动隔断系统结构


若不考虑独立门页的特殊功能, 一套完整的玻璃移动隔断系统包括下列基本构件:

1. 轨道(配螺栓与附属构件以固定)
2. 滑轮系统
3. 悬挂组件
4. 上门条
5. 下门条(上下门条均包括由弹簧夹板/面板)
6. 强化安全玻璃或层压安全玻璃

Structure of movable glass partition system

Not considering the special functions of independent doors, a complete set of movable glass partition system includes following components:


1. Track (with bolts and auxiliary parts, used for fixation)
2. Pulley system
3. Hanging components
4. Upper door bar
5. Lower door bar (both bars include spring clip plate and panel)
6. Toughened safe glass or laminated safe glass (not provided by SAFE)

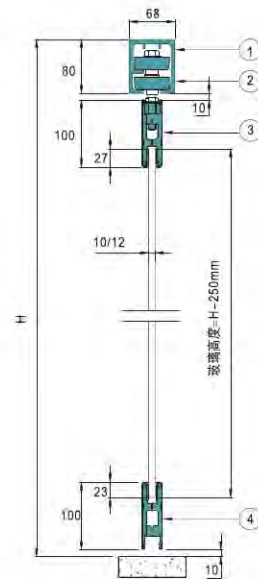

SA8900E-K

HDSAFE MOVABLE GLASS PARTITION SYSTEM

	SA8900E-2K	SA8900E-3K	SA8900E-3K	SA8900E-3K	SA8900E-3K
地弹簧 floor spring	SA8900K-1	SA8900K-6E-L	SA8900K-5E-L	SA8900K-5E-L	SA8900K-8E-L
末端门页装有上下门夹, 配合地弹簧双向推拉式门, 不可移动。 Upper and lower door clips are provided at the end door leaf, in match of the floor-spring driven double-acting door, not movable.	移动门页, 移动门吊轮及底端插销装置。 Movable door leaf, movable door hanging pulley and bottom bolt.	移动门页, 移动门吊轮及底端插销装置。 Movable door leaf, movable door hanging pulley and bottom bolt.	移动门页, 移动门吊轮及底端插销装置。 Movable door leaf, movable door hanging pulley and bottom bolt.	移动门页, 移动门吊轮及底端插销装置。 Movable door leaf, movable door hanging pulley and bottom bolt.	移动门页, 移动门吊轮及底端插销装置。 Movable door leaf, movable door hanging pulley and bottom bolt.
门页最高 Max. door leaf height	3500mm	3500mm	3500mm	3500mm	3500mm
门页最宽 Max. door leaf width	1000mm	1200mm	1200mm	1200mm	1200mm
最大承重 Max. door leaf load	100kg	120kg	120kg	120kg	120kg

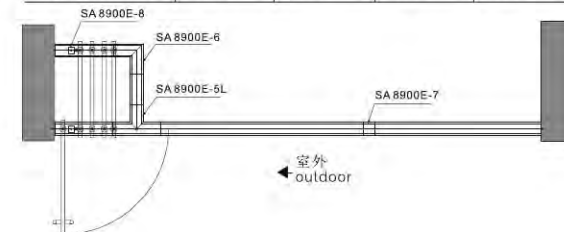

玻璃移动隔断系统结构


若不考虑独立门页的特殊功能, 一套完整的玻璃移动隔断系统包括下列基本构件:

1. 轨道(配螺栓与附属构件以固定)
2. 滑轮系统
3. 悬挂组件
4. 上门条
5. 下门条(上下门条均包括由弹簧夹板/面板)
6. 强化安全玻璃或层压安全玻璃

Structure of movable glass partition system

Not considering the special functions of independent doors, a complete set of movable glass partition system includes following components:

1. Track (with bolts and auxiliary parts, used for fixation)
2. Pulley system
3. Hanging components
4. Upper door bar
5. Lower door bar (both bars include spring clip plate and panel)
6. Toughened safe glass or laminated safe glass (not provided by SAFE)

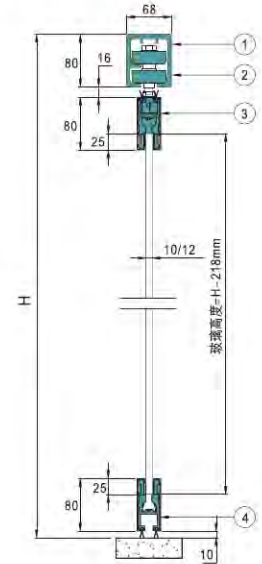

SA8900E

HDSAFE MOVABLE
GLASS PARTITION SYSTEM

SA8900E-B

SA8900E-2B

上门条/轴套
Upper door strip/shaft sleeve

SA8900E-3B

上门条/滑轮
Upper door strip/roller

SA8900E-K

SA8900E-2K

上门条/轴套
Upper door strip/shaft sleeve

SA8900E-3K

上门条/轴套
Upper door strip/shaft sleeve

通用件

Interchangeable parts

SA8900E-5L/R

轨道(三通)
Rail (T-piece)

SA8900E-6

轨道(弯头)
Rail (elbow)

SA8900E-7

维修口
Serviceentranc

SA8900E-8


止动件
Stop accessories

SA8900C-13

轨道
Track

导轨结构示意图


Guide rail structure schematic

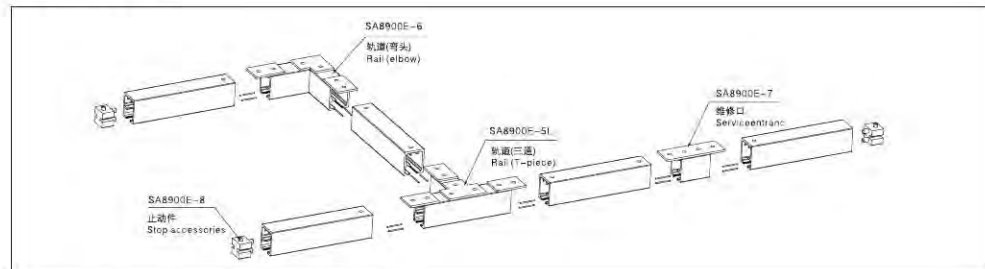


SA8900E储存区

对于已有结构或者非常规建筑布局而言, 玻璃移动隔断的储存区域往往需要经过特别的设计。赛夫SA8900D系列隔断能停驻于一系列不同类型的区域位置。门页可以平行或者垂直方式进行储存, 亦可做到显形储存或者隐性储存。同时, 可将门页收纳成直线形排列而不影响出入, 亦可将其储存于墙后或墙内。


此外, 玻璃隔断可在门面打开的条件下做特殊用途, 如作为店内橱窗或展示区域, 亦可配合合适量表面印刷以增加艺术美感。本手册仅向你阐述最常用之储存区域, 其他实际应用请向赛夫经销商或本公司查询。

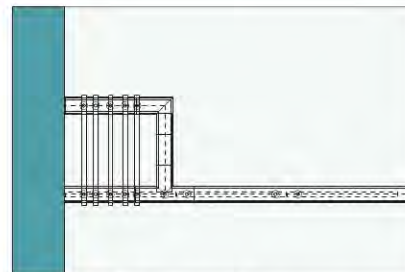


标准收纳布局(左向, 右向, 或双向收纳)
Receive standard layout (left to right to, or two-way receive)

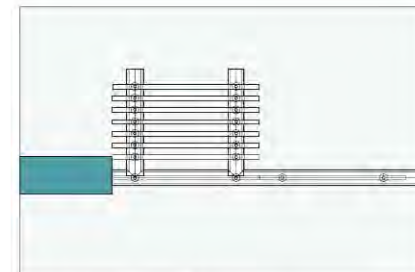


水平收纳布局(左向, 右向, 或双向收纳)
Receive horizontal layout (left to right to, or two-way receive)

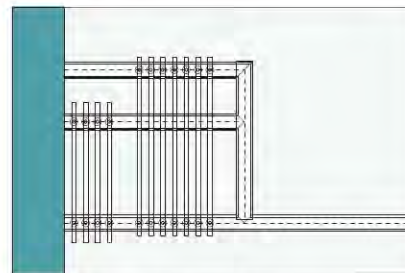


单边双收纳布局(左向, 右向, 或双向收纳)
Unilateral double receive the layout (left to right to, or two-way receive)

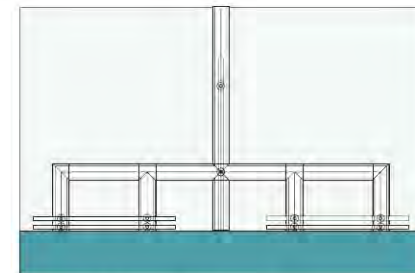

单边分体收纳布局(左向, 右向, 或双向收纳)
Unilateral fission receive layout (left to right to, or two-way receive)

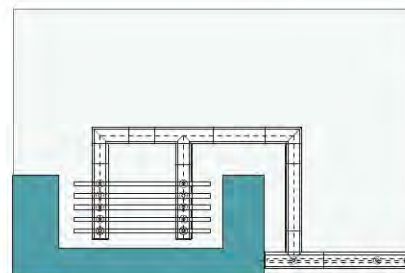

墙内收纳布局(左向, 右向, 或双向收纳)
Receive a layout inside the wall (left to right to, or two-way receive)

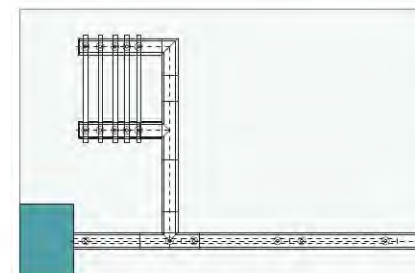



墙体外露式收纳布局(左向, 右向, 或双向收纳)
Wall exposed to receive layout (left to right to, or two-way receive)

SA8900H HDSAFE MOVABLE GLASS PARTITION SYSTEM



玻璃移动隔断系统结构配件

Structural components for movable glass partition system

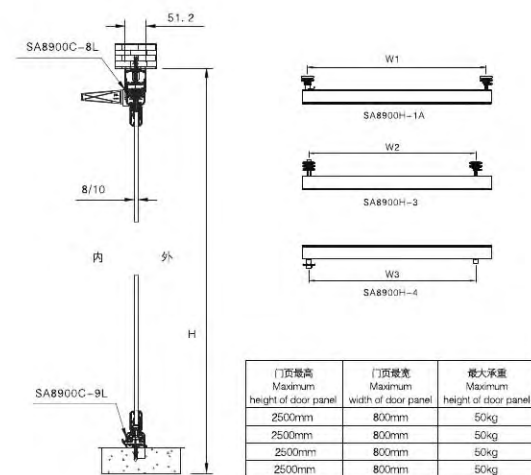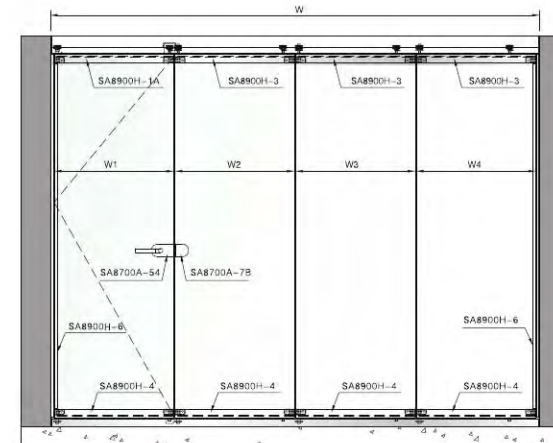

SA8900H-1A

上门条
Upper door strip



SA8900H-3

上门条
Upper door strip



SA8900H-4

下门条
Lower door strip



SA8900H-6

防撞夹板
Anti-collision parts



SA8900C-8L/R

上轨道
Upper track



SA8900C-9L/R


下轨道
Lower track



SA8900K-E

HDSAFE MOVABLE GLASS PARTITION SYSTEM

	SA8900K-2	SA8900K-3	SA8900K-3	SA8900K-3	SA8900K-3
SA8900K-1	SA8900K-6E-L	SA8900K-5E-L	SA8900K-5E-L	SA8900K-8E-L	SA8900C-2
末端门页装有上下门夹，配合地弹簧双向推拉式门，不可移动 Upper and lower door clips are provided at the end door leaf, in match of the floor-spring driven double-acting door, not movable.	移动门页，移动门吊轮及底端插销装置。 Movable door leaf, movable door hanging pulley and bottom bolt.	移动门页，移动门吊轮及底端插销装置。 Movable door leaf, movable door hanging pulley and bottom bolt.	移动门页，移动门吊轮及底端插销装置。 Movable door leaf, movable door hanging pulley and bottom bolt.	移动门页，移动门吊轮及底端插销装置。 Movable door leaf, movable door hanging pulley and bottom bolt.	
门页高度 Max. door leaf height	3500mm	3500mm	3500mm	3500mm	3500mm
门页宽度 Max. door leaf width	1000mm	1200mm	1200mm	1200mm	1200mm
最大承重 Max. door leaf load	100kg	120kg	120kg	120kg	120kg

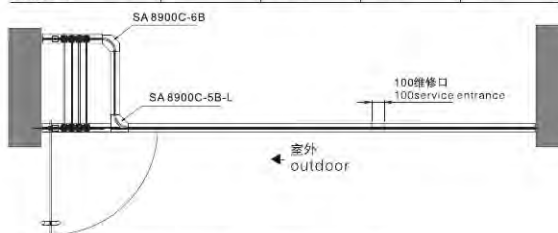


玻璃移动隔断系统结构

- 若不考虑独立门页的特殊功能，一套完整的玻璃移动隔断系统包括下列基本构件：
1. 轨道(配螺栓与附属构件以固定)
 2. 滑轮系统
 3. 悬挂组件
 4. 上门条
 5. 下门条(上下门条均包括由弹簧夹板、面板)
 6. 钢化安全玻璃或层压安全玻璃


Structure of movable glass partition system

- Not considering the special functions of independent doors, a complete set of movable glass partition system includes following components:
1. Track (with bolts and auxiliary parts, used for fixation)
 2. Pulley system
 3. Hanging components
 4. Upper door bar
 5. Lower door bar (both bars include spring clip plate and panel)
 6. Toughened safe glass or laminated safe glass (not provided by SAFE)

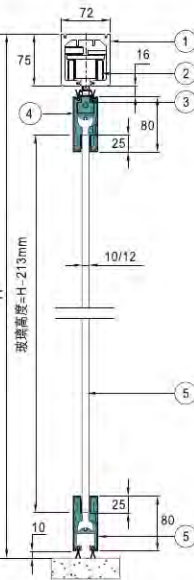

上下门条构造。

Structure of upper/lower door bars

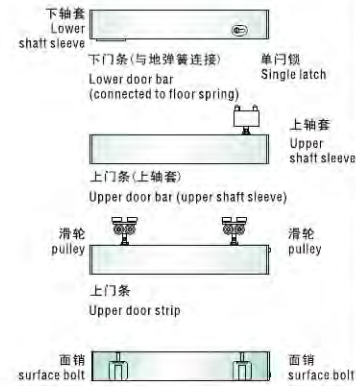

下门条(移动门页固定)
Lower door strip (fixation of movable door)



下门条(移动门页固定)
Lower door strip (fixation of movable door)



下门条(移动门页固定)
Lower door bar (fixation of movable door)



下门条(移动门页固定)
Lower door strip (fixation of movable door)



下门条(移动门页固定)
Lower door strip (fixation of movable door)

玻璃移动隔断系统结构配件

Structural components for movable glass partition system

SA8900K-1

下门条(单门锁)
Lower door strip (single latch)



SA8900K-2

上门条/轴套
Upper door strip/shaft sleeve



SA8900K-3

上门条/滑轮
Upper door strip/roller



SA8900K-4E

下门条(双面锁)
Lower door strip (double pins)



SA8900K-5E-L/R

下门条(侧销+插孔)
Lower door strip (side bolt+ jack)



SA8900K-6E-L/R

下门条(面销+插孔)
Lower door strip (surface bolt+ jack)



SA8900K-7E-L/R

下门条(面销-单门锁)
Lower door strip (side bolt+ jack)



SA8900K-8E-L/R

下门条(面销-侧销)
Lower door strip (surface bolt+ side bolt)



SA8900C-2

轨道
Track



SA8900C-5B-L/R

轨道(三通)
Rail (T-piece)





SA8900C-6B

轨道(弯头)
Rail (elbow)



SA8900M

SAFE MOVABLE
GLASS PARTITION SYSTEM


玻璃移动隔断系统结构配件

Structural components for movable glass partition system

SA8900M-1

上门条 (单头滑轮)
Upper door strip (one-side roller)


SA8900M-2

上固定门条
Upper fixing door strip


SA8900M-3

下门条 (立柱)
Lower door strip (column)


SA8900M-4L/R

下固定门条 (面销+下轴)
Lower fixing door strip (surface bolt + lower shaft)


SA8900M-1	SA8900M-5	SA8900M-1	SA8900M-5	SA8900M-1	SA8900M-2
SA8600A-13C		SA8600A-13A			
SA8900M-6R	SA8900M-5	SA8900M-6R	SA8900M-5	SA8900M-3	SA8900M-4L
100 service entrance					
折叠门页, 折叠门吊轮上锁及底端插销装置。	上、下折叠门页。	折叠门页, 折叠门吊轮上锁及底端插销装置。	上、下折叠门页。	折叠门页, 折叠门吊轮上锁及底端插销装置。	首端门页, 装上有、下固定门条及底端插销装置。
Folding door leaf, folding door hanging pulley, and bottom bolt.	upper and lower folding door leafs	Folding door leaf, folding door hanging pulley, and bottom bolt.	upper and lower folding door leafs	Folding door leaf, folding door hanging pulley, and bottom bolt.	Beginning door leaf, equipped with upper and lower fixing door strips and bottom bolt.
门页最高 Max. door leaf height	3000mm	3000mm	3000mm	3000mm	3000mm
门页最宽 Max. door leaf width	1000mm	1000mm	1000mm	1000mm	1000mm
最大承重 Max. door leaf load	90kg	90kg	90kg	90kg	90kg

此系列折叠门可将空间最大化, 地面需安装下轨。 This series of folding door can maximize the space, it needs to install rail on ground to ensure the smooth of door panel.

SA8900M-5

上、下门条
Upper and lower door strips


SA8900M-6L/R

下固定门条(面销)
Lower fixing door strip(surface bolt)


SA8900M-8L/R

下门条(面销+侧销)
Lower door strip (surface bolt + side bolt)


SA8600A-13C

移门钩锁扣
Keep box for wall


SA8600A-13A

移门钩锁
Sliding door lock with finger pull



SA8900C-2

轨道
Track


SA8700A-15

轨道
Track


SA8900M-C

HDSAFE MOVABLE
GLASS PARTITION SYSTEM


玻璃移动隔断系统结构配件

Structural components for movable glass partition system

SA8900K-1

下门条(单吊钩)
Lower door strip(single latch)


SA8900K-2

上固定门条
Upper fixing door strip



SA8900M-1

上门条/滑轮
Upper door strip/roller


SA8900M-2

下固定门条 (面销+下轴)
Lower fixing door strip (surface bolt + lower shaft)


SA8900K-2	SA8900M-1	SA8900M-5	SA8900M-1	SA8900M-2
SA8900K-1	SA8900M-7C	SA8900M-6C-R	SA8900M-5	SA8900M-4C-L
地弹簧	折叠门页， 上锁及底端 插销装置。 不可折叠	上、下折叠 门页。	折叠门页， 折叠门吊轮 上锁及底端 插销装置。	首端门页， 装有上、下 固定门条及 底端插销装置。
End door leaf, equipped with upper and lower fixing door strips, matching floor spring, double-acting type, non-folding.	Folding door leaf, folding door hanging pulley, and bottom bolt.	upper and lower folding door leafs	Folding door leaf, folding door hanging pulley, and bottom bolt.	Beginning door leaf, equipped with upper and lower fixing door strips and bottom bolt.
门页最高 Max. door leaf height	3000mm	3000mm	3000mm	3000mm
门页最大 Max. door leaf width	1000mm	1000mm	1000mm	1000mm
最大承重 Max. door leaf load	90kg	90kg	90kg	90kg



SA8900M-4C-L/R

下固定门条
Lower fixing door strip


SA8900M-5

下门条
Lower door strip


SA8900M-6C-L/R

下固定门条 (面销+滑轮)
Lower fixing door strip (surface bolt + pulley)


SA8900M-7C

下门条 (面销+面销)
Lower door strip (side bolt+side bolt)


SA8900C-2

轨道
Track



此系列折叠门可将空间最大化，地面无需安装下轴，下门夹装有万向滑轮，保证门页平稳滑行
This series of folding door can maximize the space, no need to install bottom track since there is a roller to ensure the smooth of door panel.



玻璃移动隔断系统

HDSAFE MOVABLE GLASS PARTITION SYSTEM

SA8900W

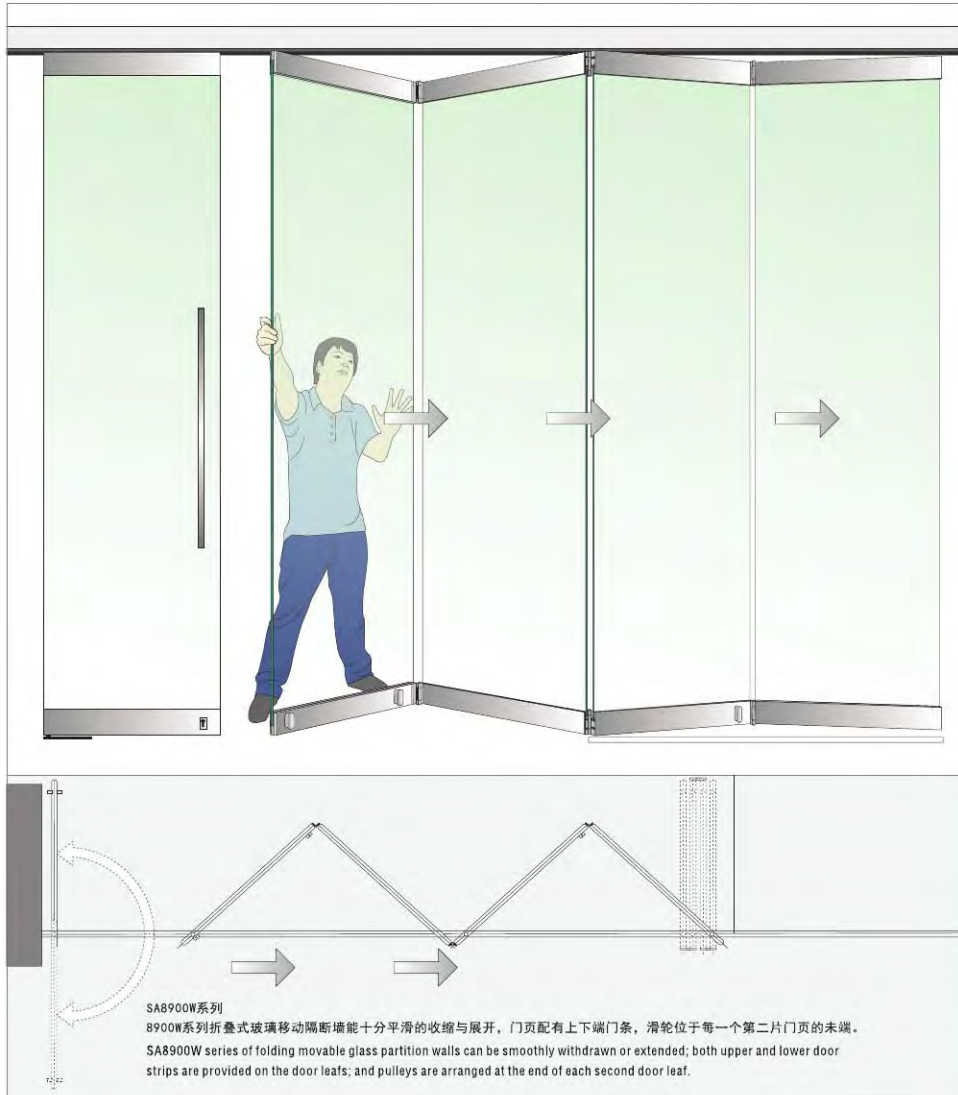



简洁简便

折叠式玻璃隔断面板采用流线型设计理念,中间无任何阻隔,令玻璃幕墙更加通透,上下门条互相连接形成一个整体,使其更加稳固与顺畅,而且操作简便,一个人就可以完成隔断的整个过程。可满足各种空间的隔断和店面系统要求。

Simple and easy

Folding glass partition panels are of streamlined design without any obstruction therein; in addition, the glass curtain walls are more transparent; both upper and lower door strips are connected into integrity, to ensure stability and smoothness; easy operation ensures only one person completes the whole partitioning process, satisfactory for the partitioning of various spaces and shops.

SA8900W

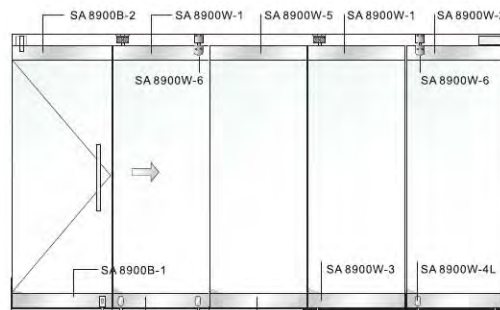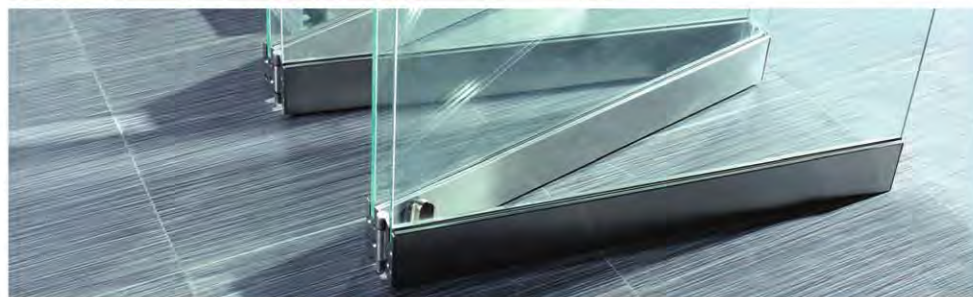HDSAFE MOVABLE
GLASS PARTITION SYSTEM


末端门页装有上下门条，配合地弹簧，双向推拉式，不可折叠。 End door leaf, equipped with upper and lower fixing door strips, matching floor spring, double-acting type, non-folding.	折叠门页，折叠门吊轮上锁及底端插销装置。 Folding door leaf, folding door hanging pulley, and bottom bolt.	上、下折叠门页。 upper and lower folding door leaves	折叠门页，折叠门吊轮上锁及底端插销装置。 Folding door leaf, folding door hanging pulley, and bottom bolt.	首端门页，装有上、下固定门条及底端插销装置。 Beginning door leaf, equipped with upper and lower fixing door strips and bottom bolt.
门页最高 Max. door leaf height	3000mm	3000mm	3000mm	3000mm
门页最宽 Max. door leaf width	1000mm	1000mm	1000mm	1000mm
最大承重 Max. door leaf load	90kg	90kg	90kg	90kg

SA8900-YG

扳手
Wrench


SA8900W-6

上锁
Lock


SA8900C-2

轨道
Track


SA8900W-7

下门条(面销+面销)
Lower fixing door strip (surface bolt + surface bolt)


SA8900W-8L/R

下门条(面销+下轴)
Lower fixing door strip (surface bolt + lower shaft)


玻璃移动隔断系统结构配件

Structural components for movable glass partition system

SA8900W-1

上门条(单头滑轮)
Upper door strip (one-side roller)


SA8900W-2

上固定门条
Upper fixing door strip


SA8900W-3

下门条(导柱)
Lower door strip (column)


SA8900W-4L/R

下固定门条(面销+下轴)
Lower fixing door strip (surface bolt + lower shaft)


SA8900W-5

上、下门条
Upper and lower door strips


SA8900W系列玻璃移动隔断门页与功能

SA8900W系列折叠式玻璃移动隔断能十分平滑的收缩与展开，门页配有上下端门条，滑轮位于每一个第二片门页的末端。

折叠式玻璃移动隔断可很好的应用于水平隔断方案。因为SA8900W系列的门页与SA8900B系列门页外表相同，两种系列的产品使用相同的导轨系统，能很好的兼容共用在一个方案中。一套SA8900W系统也能通过自由增加标准单开或双开末端门页进行组合补充。

一套SA8900W玻璃移动隔断系统基本产品包含以下关键组件：由1片末端门页和1-3片折叠门页组成；

水平双向收缩SA8900W系统可由8片门页组成。

SA8900W series of folding movable glass partition walls can be smoothly withdrawn or extended; both upper and lower door strips are provided on the door leaves; and pulleys are arranged at the end of each second door leaf.


Folding movable glass partitions can be well used for horizontal partitioning solutions. Because both SA8900W and SA8900B series share the same door leaf and same track system, they can be used in one solution. One set of SA8900W system can also be added standard single or double-opening door leaves at the terminal.

A set of SA8900W movable glass partition system basically comprises following key components: one end door leaf and 1-3 pieces of folding door leaves.



SA8900W系统装配类型

Types of SA8900W system

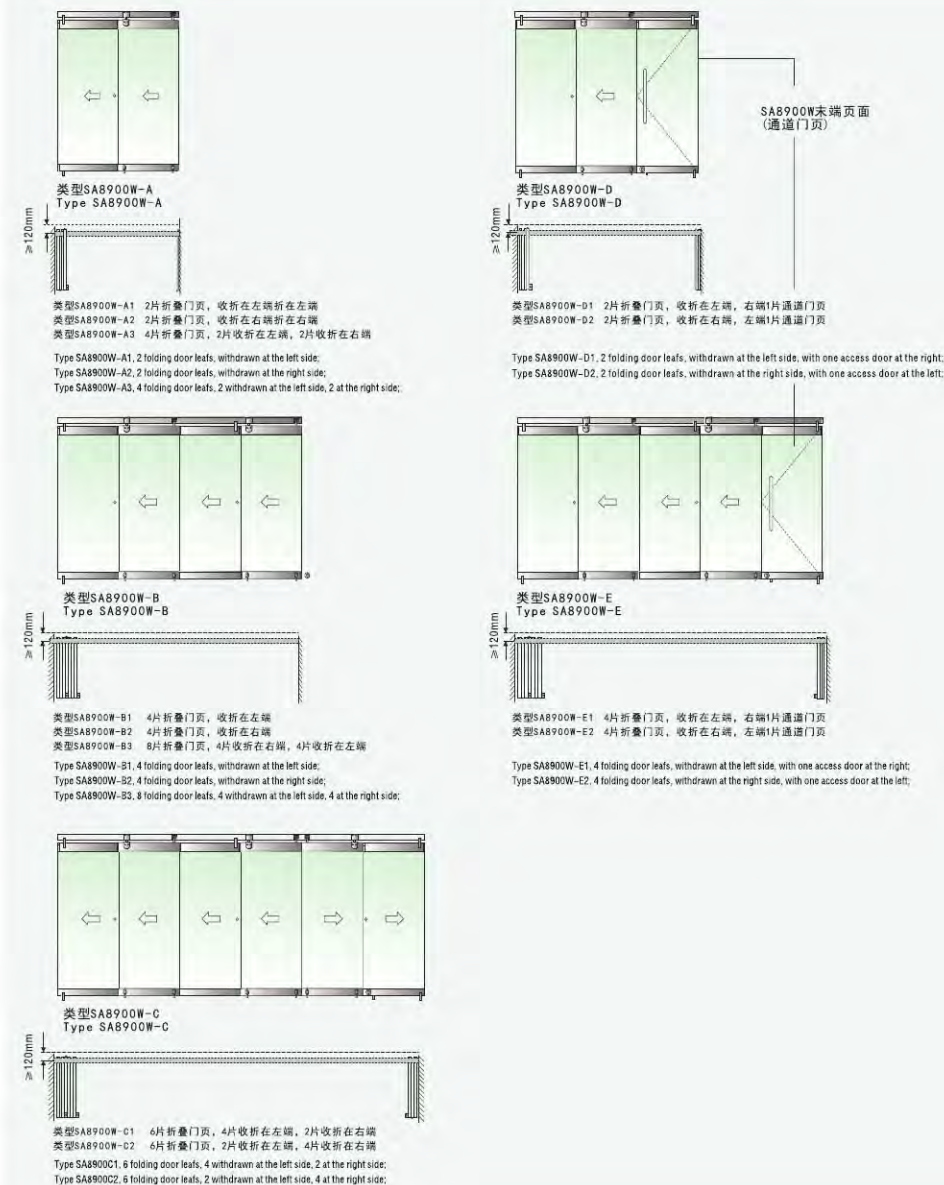

HDSAFE MOVABLE GLASS PARTITION SYSTEM


玻璃移动隔断系统



玻璃移动隔断系统

HDSAFE MOVABLE GLASS PARTITION SYSTEM

SA8900Z

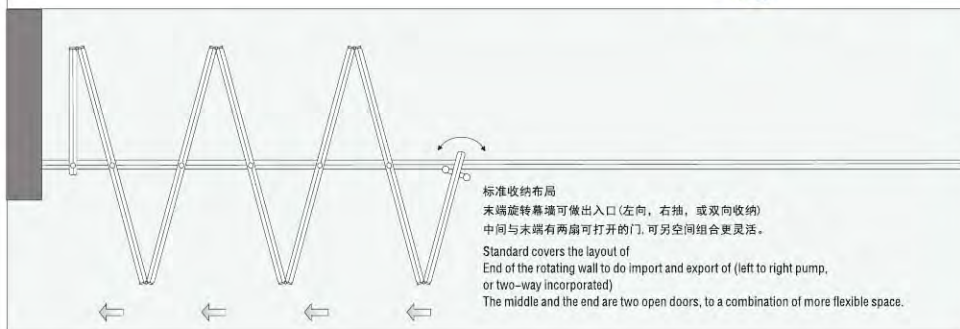

SA8900Z 系列玻璃移动隔断门页与功能

SA8900Z系列玻璃移动隔断墙, 移动顺畅, 装有上下端门条。滑轮位置位于门页正中。SA8900Z系列使用于隔断跨度较大的方案, 每一系统可由3-8片门页组成, 由于滑轮位置位于门页中点, 所以此系统不必设计成对门页, 门页沿着固定导轨滑动, 导轨安装在天花板下。此隔断系统不需要另外使用地导轨, 因此系统放置时不破坏地板。玻璃移动隔断必须有一片连接折叠门页的首端门页, 首端门页宽度为折叠门页宽度的一半, 安装轴承转轴。考虑到整体移动隔断的对称性, 末端门页的宽度应与首端门页相同, 不安装滑轮。

SA8900Z series of movable glass partitions and functions

SA8900Z series movable glass partition walls enjoy smooth movement, attached with upper and lower door strips. Pulley positions are located in the middle of door leaves. SA8900Z series can be used in the large-span partition solutions, and each system can be composed of 3-8 door leaves. Because pulley positions are at the mid-points, paired door leaves are not necessary for this system. Door leaves slide along the fixed tracks which are installed under the ceiling. This partition system does not require additional ground tracks, therefore it will not cause floor damage during arrangement. There must have a beginning door leaf that's connected to folding door leaves. The width of the beginning door leaf is half that of the folding door leaf, and a shaft shall be fitted. Taking into account the symmetry of the overall movable partition, both end and beginning door leaves shall have same width, without pulleys.

HDSAFE®

Innovation that's
out of your imagination

SAFE MOVABLE GLASS PARTITION SYSTEM

HDSAFE MOVABLE GLASS PARTITION SYSTEM

玻璃移动隔断系统

SA8900Z

玻璃移动隔断系统结构配件

Structural components for movable glass partition system


SA8900Z-1

上固定门页 (1/2门页+63mm)
Upper fixed door leaf (1/2 door leaf+63mm)



SA8900Z-2L/R

下固定门页 (1/2门页+63mm)
Lower fixed door leaf (1/2 door leaf+63mm)




SA8900Z-3

上门条 (合页-滑轮)
Upper door strip (hinge + roller)



SA8900Z-4L/R

下门条 (合页-面销)
Lower door strip (hinge + surface bolt)

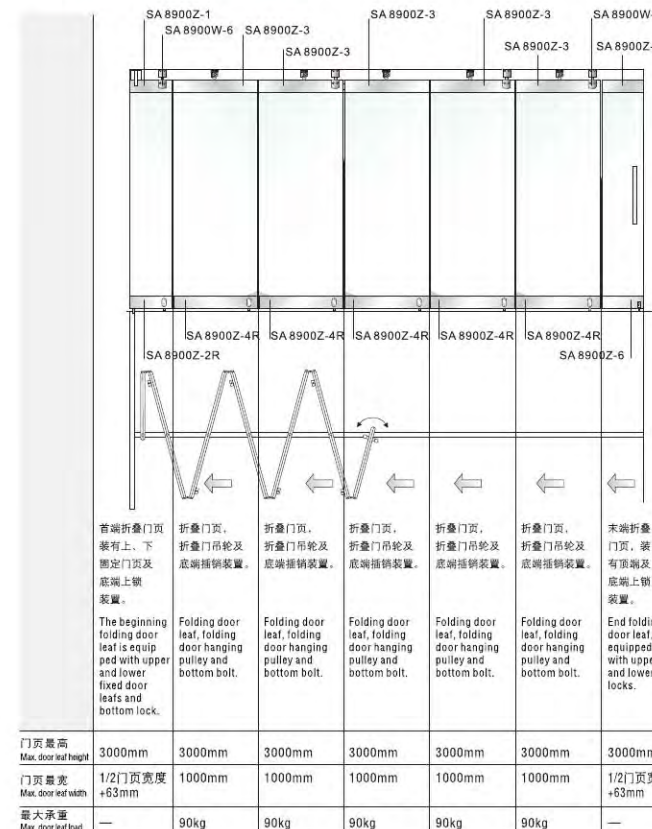

SA8900-YG

扳手
Wrench



SA8900Z-5

上末端门页 (1/2门页+63mm)
Upper end door leaf (1/2 door leaf+63mm)



SA8900Z-6

下末端门页 (1/2门页+63mm)
Lower end door leaf (1/2 door leaf+63mm)



SA8900W-6

上锁
Lock



SA8900C-2

轨道
Track




SA8900Z系列玻璃移动隔断门页与功能

SA8900Z系列玻璃移动隔断端，移动顺畅，装有上下端门条。滑轮位置位于于门页的正中。

SA8900Z系统适用于隔断跨度较大的方案，每一系统可由3-8片门页组成。由于滑轮位置位于于门页中点，所有此系统不必设计为成对门页。一套玻璃移动隔断可由两套SA8900Z系统组成。门页沿着固定导轨滑动，导轨安装在天花板下。此隔断系统不需要另外使用地导轨，因此放置时不破坏地板。玻璃移动隔断必须有一片连接折叠门页的首端门页，首端门页宽度为折叠门页宽度的一半，安装有轴承转轴。考虑到整套移动隔断的对称性，末端门页宽度的设计与首端门页相同，不安装滑轮。

SA8900Z series of movable glass partitions and functions

SA8900Z Series Glass mobile partition walls, moving smoothly, with the upper and lower side of the door. Pulley position is located in the middle of the door page. SA8900Z system is suitable for larger programs span partitions, each system can be composed of 3-8 tablets doorway pages. As the pulley location at the midpoint of doorway pages, all of this system is designed to pair doorway pages do not have to. A glass partition by moving the two sets of SA8900Z system components. Page sliding door along the fixed rail, rail installed in the ceiling. This partition system does not require additional use of ground guides, so when placed without damaging the floor. Glass mobile partition must have a connection folding Page's first side doorway pages, the first page of a width of folding side doors page width half shaft bearings installed. Taking into account the full set of mobile cut off the symmetry of the design of the width of the end of doorway pages doorway pages with the first end of the same, not to install pulley.



SA8900Z-C

SA8900Z-C在SA8900Z的基础上添加配件，在隔断打开的情况下可使用末端折叠门页作为一个通道门。

具体的运作原理是：

由特别的地锁装置和顶部上锁确定末端折叠门页。顶部的上锁能确保末端折叠门页的准确定位。与末端可摆动门页连接的折叠合页特别设计较大的偏心，为拉手的安装预留足够的空间。其他所有的折叠门页都配置标准的折叠合页和吊轮系统。


Compared to SA8900Z, SA8900Z-C products are provided with extra components. In the condition of opened partition, the end folding door leaf can be used as an access door.

Concrete running principle:

The end folding door leaf can be stabilized by special floor lock and top lock; the top lock is to ensure the accurate positioning of the end folding door leaf; The folding hinge that's connected to the swinging door leaf at the end is designed larger eccentricity to allow for the fixation of handle; all other folding door leafs are provided with standard folding hinges and hanging pulleys.

SA8900Z系统装配类型

Types of SA8900Z system

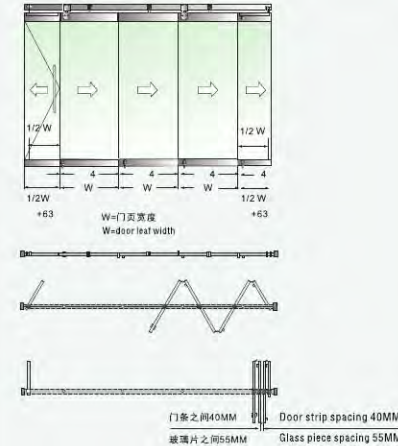


类型SA8900Z-A

1片单向开启末端门页（窄幅）
3片折叠门页
1片首端门页（窄幅）

Type SA8900Z-A

1 one-way opening end door leaf (narrow)
3 folding door leafs
1 beginning door leaf (narrow)

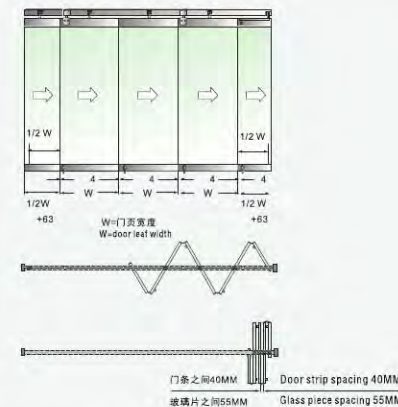


类型SA8900Z-B

1片末端门页（窄幅）
3片折叠门页
1片首端门页（窄幅）

Type SA8900Z-B

1 end door leaf (narrow)
3 folding door leafs
1 beginning door leaf (narrow)

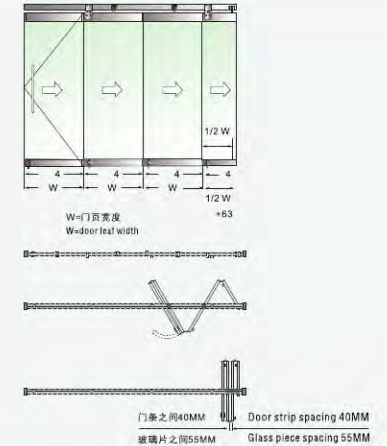


类型SA8900Z-C

1片通道门页（末端折叠门页）
2片折叠门页
1片首端折叠门页（窄幅）

Type SA8900Z-C

1 access door leaf (folding leaf at the end)
2 folding door leafs
1 beginning folding door leaf (narrow)



类型SA8900Z-C双向收折系统

左端

1片首端门页（窄幅）
2片折叠门页
1片通道门页（末端折叠门页）

Left end
1 beginning door leaf (narrow)
2 folding door leafs
1 access door leaf (folding leaf at the end)



右端

1片通道门页（末端折叠门页）
2片折叠门页
1片首端门页（窄幅）

Right end
1 access door leaf (folding leaf at the end)
2 folding door leafs
1 beginning door leaf (narrow)

HDSAFE MOVABLE GLASS PARTITION SYSTEM

玻璃移动隔断系统

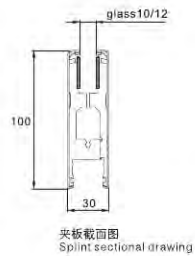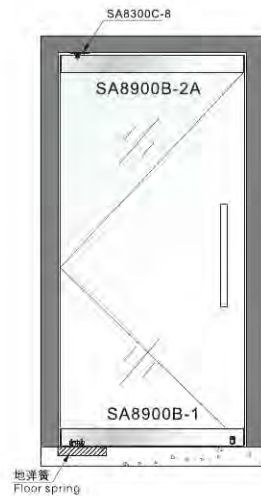



SA8900B-1 下门夹 (带锁)
100mm bottom rail with lock



SA8900B-2A 上门夹
100mm top rail with pivot point



门页最高 Max door leaf height	门页最宽 Max door leaf width	最大承重 Max door leaf load	玻璃厚度 Glass thickness
3500mm	1200mm	120kg	10/12mm

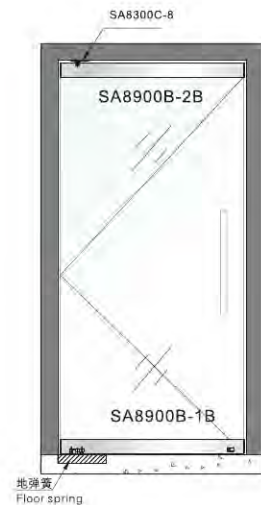



SA8900B-1B 下门夹 (带锁)
75mm bottom rail with lock



SA8900B-2B 上门夹
75mm top rail with pivot point



门页最高 Max door leaf height	门页最宽 Max door leaf width	最大承重 Max door leaf load	玻璃厚度 Glass thickness
3200mm	1200mm	110kg	10/12mm

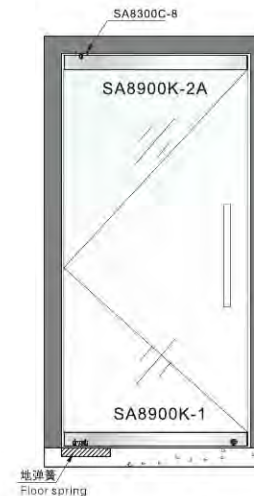



SA8900K-1 下门条 (单门锁)
Lower door strip (single latch)



SA8900K-2A 上固定门条
Upper fixing door strip



门页最高 Max door leaf height	门页最宽 Max door leaf width	最大承重 Max door leaf load	玻璃厚度 Glass thickness
3500mm	1200mm	120kg	10/12mm

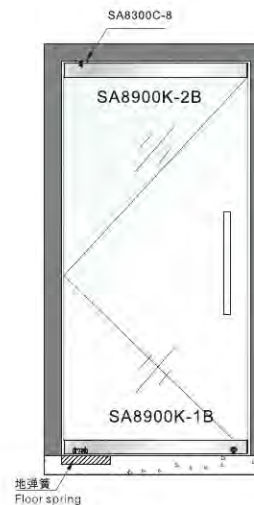

SA8900K-1B 下门条 (单门锁)
Lower door strip (single latch)



SA8900K-2B 上固定门条
Upper fixing door strip



门页最高 Max door leaf height	门页最宽 Max door leaf width	最大承重 Max door leaf load	玻璃厚度 Glass thickness
2500mm	1000mm	120kg	15/19mm